

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE\*  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.  
NM 09979

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT--" for such proposals.)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

Southeast Cha Cha

8. FARM OR LEASE NAME

9. WELL NO.

37

10. FIELD AND POOL, OR WILDCAT

Cha Cha Gallup

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 15 - T28N - R13W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

1. OIL ☒ GAS ☐  
WELL WELL OTHER

2. NAME OF OPERATOR

Hicks Enco, Inc.

3. ADDRESS OF OPERATOR

P. O. Box 174, Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.  
See also space 17 below.)

At surface 550' from South line and 2100' from East line

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GL, etc.)

6109' ground 6122' K.B.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT\*

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any  
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-  
nent to this work.)

Drilled 7 7/8" hole to 5942'. Ran electric logs. Ojo Alamo and top of Kirtland behind  
8 5/8" surface pipe.

Pictured Cliffs - 1750'

Lewis - 1900'

Cliff House - 2670'

Menefee - 3307'

PT. Lookout - 4250'


Mancos - 4530'

Gallup 5405'

Ran 5940' 5 1/2" 15.5# St & C casing set at 5940'. Stage collar set at 4570'. First stage  
cemented with 130 sks Halliburton light cement (yield 1.73 cf/sk.) Tailed in with 150  
sks 50/50 Poz - class B cement (yield 1.50 cf/sk.). Second stage cemented with 500  
sks of Halliburton light (yield 2.68 cf/sk.). Tailed in with 500 sks of 50/50 Poz-  
class B cement (yield 1.58 cf/sk.) Temperature survey shows cement between 400 and 500'.  
Slope tests:

1° 518', 1021', 1517', 2410', 2922', 3097', 3577', 4508', 4998', 5535'.  
3/4° 1920'

RECEIVED

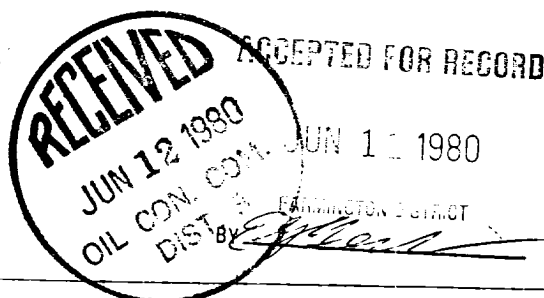

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

DATE

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: