

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No. GALLEGOS CANYON UNIT 243E
2. Name of Operator AMOCO PRODUCTION COMPANY		9. API Well No. 30-045-24866
3a. Address P.O. BOX 3092 HOUSTON, TX 77079	3b. Phone No. (include area code) Ph: 281.366.4081 Fx: 281.366.0700	10. Field and Pool, or Exploratory BASIN DAKOTA
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 24 T28N R12W NESE 1810FSL 1115FEL		11. County or Parish, and State SAN JUAN COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 3/12/2001 Amoco Production Company requested permission to continue the shut-in status pending our well by well review to determine if an attempt could be made to restore this well back to production, either in the existing zone or uphole and avoid premature abandonment of possible reserves. That request was approved 3/30/2001

We have completed the well review and find no further potential exists for this well.

Please accept our request to P&A the subject well per the attached plugging procedure.

14. I hereby certify that the foregoing is true and correct. Electronic Submission #10156 verified by the BLM Well Information System For AMOCO PRODUCTION COMPANY, sent to the Farmington	
Name (Printed/Typed) CHERRY HLAVA <i>Cherry Hlava</i>	Title AUTHORIZED REPRESENTATIVE
Signature (Electronic Submission)	Date 01/23/2002

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title <i>PE</i>	Date <i>2/8/02</i>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office <i>FFO</i>	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

AMOCO

San Juan Basin Well Work Procedure

Well Name: GCU 243E
Version: #1
Date: 1/22/2002
Budget: DRA
Repair Type: Plug and abandonment

Objectives:

1. P&A entire wellbore.

Pertinent Information:

Location:	Sec 24 T28N R12W	Horizon:	Basin Dakota
County:	San Juan	API #:	30-045-24866
State:	New Mexico	Engr:	Allen Kutch
Lease:		Phone:	(281)366-7955

Formation Tops: (Estimated formation tops)

Nacimiento:		Menefee:	
Ojo Alamo:		Point Lookout:	
Kirtland Shale:		Mancos Shale:	
Fruitland:	1064	Gallup:	5212
Pictured Cliffs:	1568	Graneros:	
Lewis Shale:		Dakota:	6164
Chacra:		Morrison:	
Cliff House:	3146		

Bradenhead Test Information:

Test Date:	Tubing:	Casing:	BH:	
Time	BH	CSG	INT	CSG
5 min				
10 min				
15 min				

Comments:

Plug and abandonment procedure GCU 243E

1. Contact Federal and State agencies prior to starting P&A work (NMOCD Charlie Perrin, 505-334-6178 X16, BLM 505-599-8907).
2. Check location for anchors. Install if necessary. Test anchors.
3. MIRUSU. Check and record tubing, casing and bradenhead pressures.
4. Blow down well and kill well, if necessary, with lease water.
5. ND wellhead. NU BOP's.
6. POOH with 2-3/8" tbg, visually inspecting.
7. TIH with CIBP on tbg. Set CIBP at 6100' to abandon the DK perfs.
8. Spot 12 sack cmt plug 5950' – 6100' to isolate the DK.
9. Spot 12 sack cmt plug 5100' – 5250' to isolate the GP.
10. Spot 12 sack cmt plug 3000' – 3150' to isolate the MV.
11. Spot 12 sack cmt plug 1450' – 1600' to isolate the PC.
12. Spot 12 sack cmt plug 950' – 1100' to isolate the Fruitland.
13. Perf 600' at 4 JSPF. Sqz with 100 sxs cmt, leaving 19 sxs inside csg from 350' – 600' to isolate the Ojo Alamo.
14. Spot 12 sack cmt surface plug 0 – 150'.
15. ND BOP. Cut off wellhead and casing. Weld on ¼" steel plate and PXA marker.
16. Provide workorder to Buddy Shaw for surface reclamation.

GCU 243E - Proposed P&A Configuration
San Juan County, NM
Unit F Section 24 T28N - R12W
Run 24

1-22-2002
ATK

KB: 13'

Proposed sqz
perfs @ 600' w/
100 sxs


Csg leak between
1584' - 1600'
sqzd w/ 100sxs
(4/92)

Csg leak between
2483' - 2498'
sqzd w/ 10 bbls
cmt (4/92)

TOC @ 2870' by
CBL

DK perfs:

6163' - 6192'
6196' - 6200'
6222' - 6226'

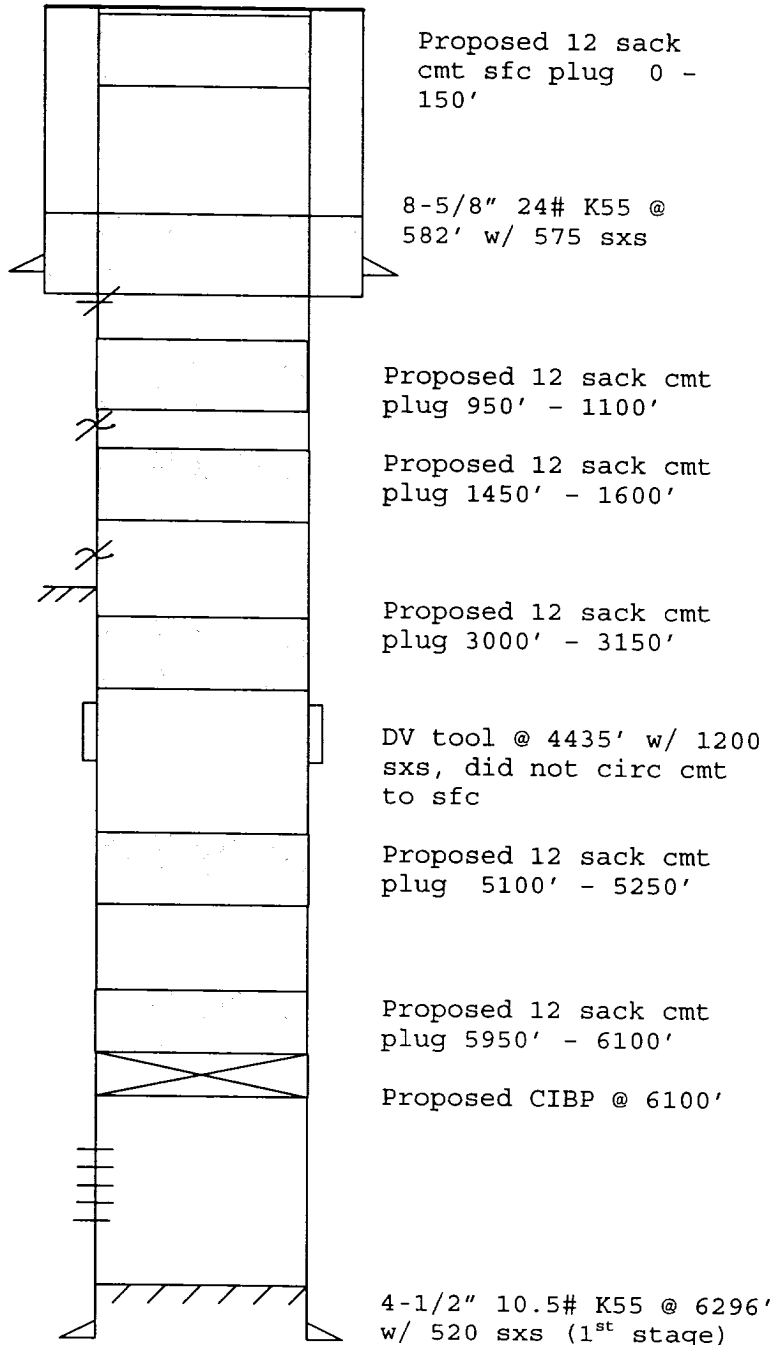

PBTD: 6215'
TD: 6252'