SUBMIT IN TRIPLICATE*

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNIT	ED S	STATE	ES	
DEPARTMENT	OF	THE	INTERIOR	₹

(MAIL)	UNIT DEPARTMENT	TED STATES TOF THE IN	rever	structions on ese side)	30 - 039 - 2/367 5. LEASE DESIGNATION AND SERIAL NO.
	GEOLO	GICAL SURVEY	(SF 080146
APPLICATION	I FOR PERMIT	O DRILL, DI	EPEN, OR PLUC	BACK	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
la. TYPE OF WORK					7. UNIT AGREEMENT NAME
DRI b. TYPE OF WELL	LL X	DEEPEN 🗌	PLUG I	BACK 🗌	}
OIL GA	ELL X OTHER		SINGLE MU ZONE ZOI	LTIPLE	San Juan 29-6 Unit 8. FARM OR LEASE NAME
2. NAME OF OPERATOR	The state of the s				San Juan 29-6 Unit
	eline Corporati	lon			9. WELL NO.
3. ADDRESS OF OPERATOR	77				7A
	Farmington, New		+UL ar State requirements.*)	,	10. FIELD AND POOL, OR WILDCAT
At surface	0' FNL & 895' H		,		Blanco Mesa Verde
At proposed prod. zone					AND SURVEY OR AREA
	As above				Sec. 34, T29N, R6W 12. COUNTY OR PARISH 13. STATE
14. DISTANCE IN MILES A	AND DIRECTION FROM NEAR	REST TOWN OR POST	OFFICE*		12. COUNTY OR PARISH 13. STATE
15. DISTANCE FROM PROPO	grn•	! 1	6. NO. OF ACRES IN LEASE	1 17 NO	Rio Arriba N.M.
LOCATION TO NEAREST	•	1	U. NO. OF ACEDS IN DEASE		OF ACRES ASSIGNED THIS WELL 220
	INE, FT. L. unit line, if any) 95		9. PROPOSED DEPTH	20. ROT.	320 ARY OR CABLE TOOLS
TO NEAREST WELL, DE OR APPLIED FOR, ON THE	RILLING, COMPLETED,	mile	5599 '		Rotary
21. ELEVATIONS (Show whe	ther DF, RT, GR, etc.)			<u>!</u>	22. APPROX. DATE WORK WILL START*
	6335' GR				March 20, 1977
23.	P	PROPOSED CASING	AND CEMENTING PRO	GRAM	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOO	SETTING DEPTH		QUANTITY OF CEMENT
12 1/4"	9 5/8"	36	200'		115 sxs.
8 3/4"	711	20	3603'		150 exs.
6 1/4"	4 1/2" Lin	er 10.5	3453'-T.D.		210 sxs.
A BOP will be All subsequen	installed afte t work will be ction 34 is ded	r the 9 5/8" conducted th	rough the BOP.	has been	n run and cemented.
signed D.H. M.	drill or deepen directiona			s and measure	ductive some and proposed new productive ed and true vertical depths. Give blowout DATE 2/3/77
PERMIT NO.			APPROVAL DATE		
APPROVED BYCONDITIONS OF APPROVE	AL, IF ANY:	TITLE			DATE
Olio		I BANADA		Me we we	

*See Instructions On Reverse Side

NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section.

Operator		An distances in	Lease	es of the Section.	Well No.			
Northwest Pir	oeline Corr	oration	San Juan 29-	-6 Imit	7 A			
	ection	Township	Range	County				
E	34	29N	6W	Rio Arrib	oa .			
Actual Footage Locatio		•						
	eet from the NC		ne and 895	feet from the West	line			
Ground Level Elev.	Producing Fo		Pool		Dedicated Acreage:			
6335	Mesa Ve				320 Acres			
. 1. Outline the a	acreage dedica	ated to the subj	ect well by colored pend	cil or hachure marks	on the plat below.			
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).								
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling.etc?								
Yes	□ No If a	nswer is "yes;"	type of consolidation					
If answer is	"no" list the	owners and trac	t descriptions which hav	re actually been con-	solidated. (Use reverse side of			
this form if no	ecessary.)		t descriptions which hav	e detadily been cons				
No allowable forced-pooling sion.	will be assign g, or otherwise	ed to the well un) or until a non-si	til all interests have be andard unit, eliminating	en consolidated (by such interests, has	communitization, unitization, been approved by the Commis-			
			1		CERTIFICATION			
I	1		1		GER III TEATION			
=	1	Ŧ	1	l he	ereby certify that the information con-			
.	I	<u>.</u>	1	1 1	ned herein is true and complete to the			
230	!		1	bes	t of my knowledge and belief.			
를 기계	 	I	.		H Maronelli			
I	- +	I		Name	D.H. Maroncelli			
8951	1	, T		Positi	Production Engineer			
T 7A	ł	Ŧ	1	Nort	hwest Pipeline Corp.			
Ŧ	1	Ŧ		Compo				
<u> </u>	i 1	_		Jani	ary 31, 1977			
SF 080146	i i	Ŧ		Date	,			
T 3r 000140	,	Sec Ϊ	100	'', \ \				
		- 34	10000	·0/4,				
	1		1000	3 / 1 / 1 / 16	ereby certify that the well-location			
Ŧ	1	₹	J W 0181	show	wn on this plat was plotted from field			
#	1	•		note	es of actual surveys made by me or			
I	1			unde	er my supervision, and that the same			
Ŧ	l I	Ŧ	i	11.	true and correct to the best of my			
1	<u> </u>			knov	vledge and belief.			
7								
Ĭ °	1	±	1.	[]	Surveyed			
Ξ	1	Ī	·		nuary 27, 1977 ered Professional Engineer			
T	1	王	Ï	and/or	Land Surveyor			
1	 =	#	ļ I	Fr	ed R. Kend In			
					cate No.			
0 330 660 90	1320 1650 198	0 2310 2640	2000 1500 1000	500 0 39	50			

KEHABILITATION AGREEMENT

	; Well Name and No.: San Juan 29-6 Unit #7A ec. 34, T. 29 N., R. 6 W.
Northwest Pipeline Corpo face owned by Prax Tru agrees to complete the	
<u>/x/</u> Yes <u>//</u> No	Maintain access road and provide adequate drainage to road.
· <u>/x/</u> Yes <u>//</u> No	Reshape and ruseed any area in excess of the pump and support facilities.
Other requirements:	:
The following work will	be completed when the well is abandoned:
<u>√x</u> / Yes <u>/</u> / No	Site will require reshaping to conform to existing topography.
<u>√x</u> Yes <u>√</u> /No	Pit will be fenced until dry, then filled to conform to topography.
<u>∫</u> x/Yes <u>∫</u> /No	Entire disturbed area will be reseeded. If yes, the following seed mixture will be used:
	Mixture #1
Yes // No	Access road will be rehabilitated and reseeded using the same seed mixture as above.
// Yes // No	Access road will remain for landowner's use.
Other requirements:	
andowner_	Operator/Lessee
Address: 1007 Brown Road	Name: Northwest Pipeline Corporation Address: P.O. Box 90
ity: Farmington tate: New Mexico	City: Farmington State: New Mexico
Celephone: 325-8374	Telephone: 327-5351 Date: 2-21-77
/X/ Yes // No	I certify rehabilitation has been discussed with the surface owner.

This agreement covers rehabilitation requirements only and does not affect any; other agreements between the lessee/operator and surface owner.

NORTHWEST PIPELINE CORPORATION

MULTI - POINT SURFACE USE PLAN

for the San Juan 29-6 Unit

Well Number 7A

- 1. Existing Roads: See attached topographic map. All existing roads used, shall be maintained in a serviceable condition at all times during the drilling operation.
- 2. Planned Access Roads: See attached topographic map. Maximum grade is approximately 1%. The road surface will not exceed twenty feet in width. Upon completion of drilling operations, the access road will be adequately drained to control runoff and soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary. All activities will be confined to the access road and drill pad.
 - 3. Location of Existing Wells: See attached topographic map.
 - 4. Location of Tank Batteries; Production Facilities; and Production, Gathering, and Service Lines: See attached topographic map for locations of existing and proposed gas gathering lines. The pipeline will be constructed adjacent to the area cleared for the access road.
 - 5. <u>Location and Type of Water Supply</u>: Water needed for the drilling operation will be hauled from the San Juan 29-6 Unit Water Well located in the SW/4 28, T29N, R6W.
 - 6. Source of Construction Materials: No additional materials will be needed.
 - 7. Methods for Handling Waste Disposal: All garbage, debris, and trash will be buried at least three feet deep. A portable toilet will be supplied for human waste. After drilling operations have been completed the reserve pit will be fenced and the liquid protion will be allowed to evaporate before the location is cleaned-up and leveled. The earthen pits will not be located on natural drainages and will be constructed in such a manner so that they will not leak. Any evaporator pit containing toxic liquids will be fenced.
 - 8. Ancillary Facilities: There will be no camps or airstrips associated with the drilling of this well.
 - 9. Well Site Layout: See attached location layout sheet.
- 10. Plans for Restoration of the Surface: Upon completion of drilling, the location will be cleaned, and leveled so that no cut or fill banks will be steeper than 3:1.

All of the area disturbed in connection with the drill site will be seeded as close as possible for any above ground equipment while still allowing for access to the equipment. Seeding will be done within one year after drilling is completed and during the period from July 1 through September 15. Seeding will be done with seed Mixture #1.

All equipment above ground will be painted a non-glare, non-reflective, non-chalking color that simulates the natural color of the site. For this well code number 595-34217, Green.

11. Other Information: If, during operations, any historic or prehistoric ruin, monument or site, or any object of antiquity is discovered, then work will be suspended and the discovery will be reported the the District Manager of the BLM.

Multi - Point Surface Use Plan San Juan 29-6 Unit #7A Page 2

When drilling with gas, the line used to discharge and burn off the gas will be located so as not to damage vegetation in the area, and if necessary an earthen screen will be constructed to protect the vegetation. All liquids from the line will be contained at the site unless otherwise specified by the surface agency's representative.

The area covered by the location and proposed access road is gently sloped with scattered brush and some grasses.

12. Operator's Representative: D.H. Maroncelli, P.O. Box 90, Farmington, N.M. 87401, Phone: 327-5351 Extension 54.

13. <u>Certification</u>:

I hereby certify that I have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Northwest Pipeline Corporation and it contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

2-21-77

Production Engineer

OPERATIONS PLAN

San Juan 29-6 Unit #7A

Rio Arriba County, New Mexico

I. LOCATION: NW/4 Sec. 34, T29N, R6W

LEASE NUMBER: SF 080146

FIELD: Blanco Mesa Verde

ELEVATION: 6335' GR

II. GEOLOGY:

A. Formation Tops:

Surface	Cliff Wouge:	49841
	CIIII nouse.	4704
2371 '	Menefee:	5069'
2502 ¹	Point Lookout:	53991
2953 '	Total Depth:	5599'
3248 °		
		2371' Menefee: 2502' Point Lookout: 2953' Total Depth:

Pictured Cliffs: 3248' Lewis: 3403'

B. Logging Program: Gamma Ray-Induction and Density at T.D.

C. Coring Program: None

D. Testing Program: None

III. DRILLING:

- A. Anticipated starting date and duration of activities: March 20, 1977. Operations will last about 15 days.
- B. BOP: Blind rams and pipe rams, 10", 900 series, double gate, rated at 3000 PSI.
- C. Mud Program:
 - (a) Spud Mud: Water, lime and gel.
 - (b) Surface to 3403'
 Viscosity: 32-38 sec/qt.
 Weight: 8.8-9.2 #/gal.
 Water Loss: 8-20 cc.
 Ph: 8.5-9.5
 - (c) From 3403' to 3603'
 Viscosity: 36-45 sec/qt.
 Weight: 8.5-9.5 #/gal.
 Water Loss: 6-12 cc.
 Ph: 8.5-9.5
 - (d) From 3603' to total depth with gas.

IV. MATERIAL:

A. Casing Program:

Hole Size	Depth O.H.	Casing Size	Wt. &	Grade	<u>Depth Set</u>
12 1/4"	200'	9 5/8"	36#	K-55	2001
8 3/4"	3603 '	7"	20#	K-55	3603 ¹
6 1/4"	3603'-T.D.	4 1/2"	10.5#	K-55	3453'-T.D.

Operations Plan San Juan 29-6 Unit #7A Page 2


B. Tubing Program: 5550' 2 3/8", 4.7#, K-55 tubing with seating nipple on top of bottom joint. Expendable check valve on bottom.

V. CEMENTING:

- A. Surface Casing 9 5/8" Use 115 sks. of C1. "B" w/1/4# gel flake/sk. & 3% calcium chloride(100% excess to circulate). WOC 12 hrs. Test surface csg. to 600 PSI for 30 min.
- B. Intermediate Casing Use 100 sks. of Cl. "B" 65/35 poz w/12% gel & 15.52 gal. water/sk. Tail in w/50 sks. Cl. "B" w/2% calcium chloride (65% excess to cover Ojo Alamo). WOC 12 hrs. Run temp. survey after 8 hrs. Test csg. to 600 PSI.
- C. Production Liner 4 1/2" Use 210 sks. of C1. "B" w/4% gel & 1/4 cu. ft. of fine Gilsonite/sk. Precede cmt. with 20 bbls. water mixed w/3 sks. gel (70% excess to circ. liner). Set liner pack off & reverse out excess cmt. Run 6 1/4" bit to top of liner & pressure test. (test 12 hrs. after plug is down). Lay down DP & run 3 7/8" bit on & 2 3/8" EUE tubing to clean out liner. Perforate 18 hrs. after plug is down.

NORTHWEST PIPEUNE CORPORATION

SAN TUAN 29-6 UNIT # 7A

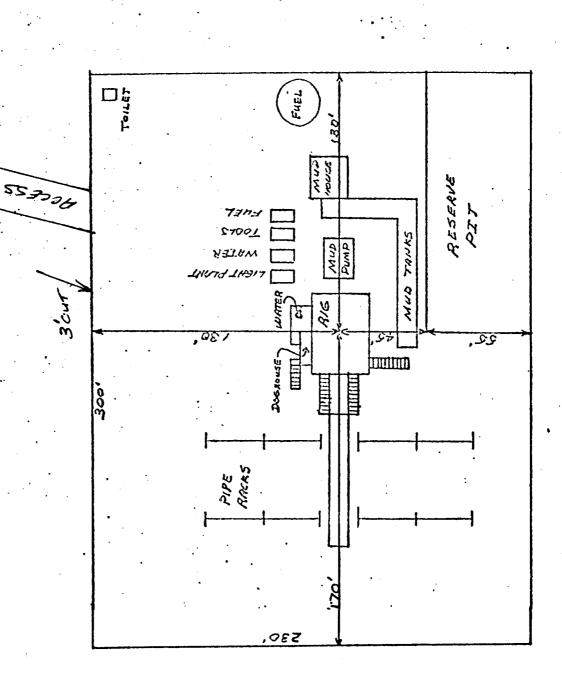

DATE: 2-18-77 SCALE: 1 cm = 20

