DEPARTY OF THE STREET LANGE OF LANGE OF THE PARTY OF THE

Meter Number: 73241
Leccinon Name: CORNELL DAKOTA GAS UNT C1

Location:TN-29 RG-12 SC-11 UL-D

2 - Federal

NMOCD Zone:OUTSIDE

Hazard Ranking Score:00

PECEIVED APR 1 4 1997

OIL CON. DIV

# RATIONALE FOR RISK-BASED CLOSURE OF PRODUCTION PITS LOCATED OUTSIDE OF THE VULNERABLE ZONE IN THE SAN JUAN BASIN

This production pit location was ranked according to the criteria in the New Mexico Oil Conservation Division's Unlined Surface Impoundment Closure Guidelines and received a ranking score of zero. The estimated depth to groundwater is greater than 100-feet beneath ground surface (bgs), the pit is not in a well head protection area, and there are no surface water bodies within 1,000 horizontal feet of the pit location.

The primary source, discharge to the pit has been removed. There has been no discharge to the pits for at least 4 years and the pits have been closed for at least one year.

Each pit was backfilled with clean soil and graded in a manner to divert precipitation away from the excavated area. Minimal infiltration of rainfall is expected. Any rainfall that does infiltrate the ground surface must migrate through clean backfill before reaching the residual hydrocarbons.

There is no source material at the ground surface, so direct contact of hydrocarbons with livestock and the populous is not likely.

In general, outside of the vulnerable area and alluvial valleys, bedrock material is generally encountered within 20 feet of the ground surface. Bedrock material in the San Juan Basin consists of interbedded sandstones, shales and clays. According to Freeze and Cherry, 1979, the hydraulic conductivity of the bedrock material are as follows:

Sandstone  $10^{-9}$  to  $10^{-13}$  cm/sec Shale  $10^{-12}$  to  $10^{-16}$  cm/sec Clay  $10^{-12}$  to  $10^{-15}$  cm/sec

Based on this information, the residual hydrocarbons should not migrate to groundwater.

Natural process (bioremediation) are degrading the residual hydrocarbon to carbon dioxide and water and will continue until the source is gone, therefore minimizing any impact to the environment.

Based on the above information, it is highly unlikely that any source material will impact groundwater or ever find an exposure pathway to affect human health and therefore El Paso Field Services Company (EPFS) requests closure of this pit location.

### FIELD PIT SITE ASSESSMENT FORM



GENERAL	Meter: 73241 Location: CORNELL DAKOTA GAS UNIT C #    Operator #: 6203 Operator Name: Amoco P/L District: Ku7z  Coordinates: Letter: D Section II Township: 29 Range: 12  Or Latitude Longitude  Pit Type: Dehydrator X Location Drip: Line Drip: Other:  Site Visit Date: 3.17.94 Run: 02 02
SITE ASSESSMENT	NMOCD Zone: Inside
REMARKS	Remarks: 3 PITS ON LOCATION. ONLY 1 PIT TO CLOSE. PIT DRY.

	ORIGINAL PIT LOCATION
LOCATION	Original Pit : a) Degrees from North 92° Footage to Wellhead 118′ b) Degrees from North Footage to Dogleg Dogleg Name C) Length : 14′ Width : 13′ Depth : 1′
ORIGINAL PIT LOCA	N 118' 14'
	Remarks:  STARTED TAKING PICTURES AT 2:06 P.M.  END DUMP
REMARKS	
	Completed By:  3.18.94  Signature  Date

## FIEL PIT REMEDIATION/CLOSULE FORM

GENERAL	Meter: 7324 Location: Cornell Dakota Gas Unit C# / Coordinates: Letter: D. Section_IL Township: 29 Range: 12  Or Latitude Longitude  Date Started: 5 13.54 Area: 02 Run: 02
FIELD OBSERVATIONS	Sample Number(s): $\sqrt{W}$ 74  Sample Depth: $\frac{12}{12}$ Feet  Final PID Reading $\frac{317}{12}$ PID Reading Depth $\frac{12}{12}$ Feet  Yes No  Groundwater Encountered $\boxed{(1)}$ $\boxed{(2)}$ Approximate Depth $\boxed{(2)}$ Feet
CLOSURE	Remediation Method:  Excavation
REMARKS	Remarks: No live markers  Signature of Specialist: Wale Wilson



# FIELD SERVICES LABORATORY ANALYTICAL REPORT PIT CLOSURE PROJECT - Soil

#### SAMPLE IDENTIFICATION

		IDENTIFICA		· · · · · · · · · · · · · · · · · · ·		
	Field	d ID		Lab ID		
SAMPLE NUMBER:	٧w٦	4	g.	15145		
MTR CODE   SITE NAME:	73241 5-13-94		2/A 1345			
SAMPLE DATE   TIME (Hrs):						
SAMPLED BY:			IA	olai.		
DATE OF TPH EXT.   ANAL.:	5/17/94 5/17/94					
DATE OF BTEX EXT.   ANAL.:	N	A	NIA			
TYPE   DESCRIPTION:	٧G		Grey to	e sand		
REMARKS:						
		RESULTS				
PARAMETER	RESULT	UNITS	in the second of	QUALIFII	ERS	
			DF	Q	M(g)	V(ml
BENZENE		MG/KG				
TOLUENE		MG/KG				
ETHYL BENZENE		MG/KG				<u>.</u>
TOTAL XYLENES		MG/KG				
TOTAL BTEX		MG/KG				
TPH (418.1)	<10	MG/KG			2.16	28
HEADSPACE PID	317	РРМ			, iii.	
PERCENT SOLIDS	95.7	%			#10.0 1.45.0 1.45.0 1.45.0 1.45.0	r in the second
TERCENT SOLIDS			A Method 8020			

\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\* Test Method for Oil and Grease and Petroleum Hydrocarbons in Water and Soil

Perkin-Elmer Model 1600 FT-IR Analysis Report \*

P4/05/17 15:31


Sample identification 745165

Initial mass of sample, g 2:160

Volume of sample after extraction, ml 13.000

Patroleum hydrocarbons, ppm

222.056 Net absorbance of hydrocarbons (2930 cm-1) -0.028

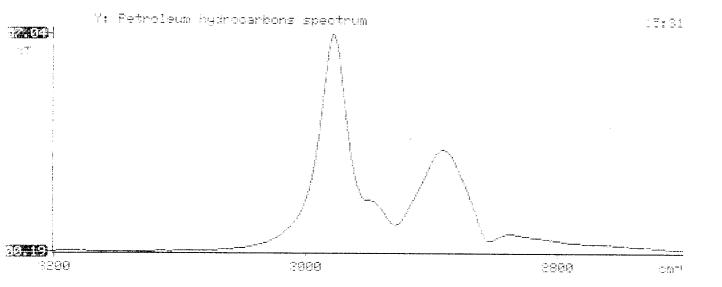

\*

\*