

UNITED STATES
DEPARTMENT OF INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 10C4-0135
Expires: March 31, 1993

SUNDRY NOTICE AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir. Use APPLICATION
TO DRILL for permit for such proposals

5. Lease Designation and Serial No.
Rosa Unit SF- () 78766

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Rosa Unit #170

9. API Well No.
300392585100

10. Field and Pool, or Exploratory Area
Blanco Mesa Verde

11. County or Parish, State
Rio Arriba, NM


SUBMIT IN TRIPLICATE

1. Type of Well
Oil Well Gas Well ☒ Other

2. Name of Operator
WILLIAMS PRODUCTION COMPANY

3. Address and Telephone No.
P.O. Box 316 - Ignacio, CO 811237

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1025' FSL 1845' FWL Sec. 21 T31N R6W



CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
Notice of Intent <input checked="" type="checkbox"/>	Abandonment
Subsequent Report	Recompletion
Final Abandonment	Plugging Back
	Casing Repair <input checked="" type="checkbox"/>
	Altering Casing
	Other _____
	Change of Plans
	New Construction
	Non-Routine Fracturing
	Water Shut-Off
	Conversion to Injection
	Dispose Water
	(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Williams proposes to investigate a possible casing leak in this well per the attached procedure. Estimated start date is April 1, 2001.

14. I hereby certify that the foregoing is true and correct

Signed

Stergie Katirgis
Stergie Katirgis

Title Sr. Engineer Date 3-2-01

(This space for Federal or State office use)

Approved by

Title

Date 3/8/01

Conditions of approval, if any:


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

3/2/01

WILLIAMS PRODUCTION COMPANY
Rosa #170

Purpose: To locate and repair possible casing leak.

1. Check location and rig anchors. Set new anchors if necessary.
Dig a small circulation pit.
Notify COCCC prior to moving in.
2. MIRUSU. Nipple up and test BOP, stripping head, blooie line, working valves and 2" relief line.
3. Blow down well. **Kill with 1% KCl water only if necessary**
4. TOH with 2-3/8" tubing. Check tbg.
5. Set 4-1/2" RBP above perms in 4-1/2" liner. Load hole with 1% KCl water. Pressure test casing to 800 psi. Locate csg leak if pressure doesn't hold. Note: Liner top at 3582'.
6. When leak is isolated, pump into it and establish a rate.
7. Squeeze below packer with Class "B" cement. Set pkr at least 100' above hole. Conditions and depth will determine additives.
Hesitate last few sx cement below tbg to build pressure. S.I. overnight.
8. Drill out cement. Pressure test to 800 psi. TOH with tbg and packer.
9. TIH and retrieve RBP.
10. TIH with 2-3/8", 4.7#, J-55, 8rd, EUE tbg and land at ±5969'.
11. Swab well in to unload water.
12. ND BOP and NU wellhead.
13. Clean up location and release rig.

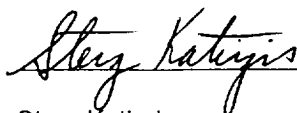

Sterg Katirgis
Sr. Engineer

ROSA UNIT #170 BLANCO MESAVERDE

Location: 1025' FSL, 1845' FWL
SE/4 SW/4 Section 21N, T31N, R6W
Rio Arriba Co., NM

Spud Date 7-06-1998
Completion Date 9-05-1998


Elevation: 6371' GR
KB = 12'

Tops	Depth
Kirtland	2491'
Fruitland	3009'
Pictured Cliffs	3240'
Cliff House	5351'
Point Lookout	5662'
Mancos	6117'

STIMULATION

CliffHouse/Menefee 4430' - 5497' (42, 0.38" holes)
80,000# of 20/40 sand in 2108 BBI's slick water.

Point Lookout 5584' - 5969' (46, 0.38" holes)
81,000# of 20/40 sand in 2520 BBI's slick water.

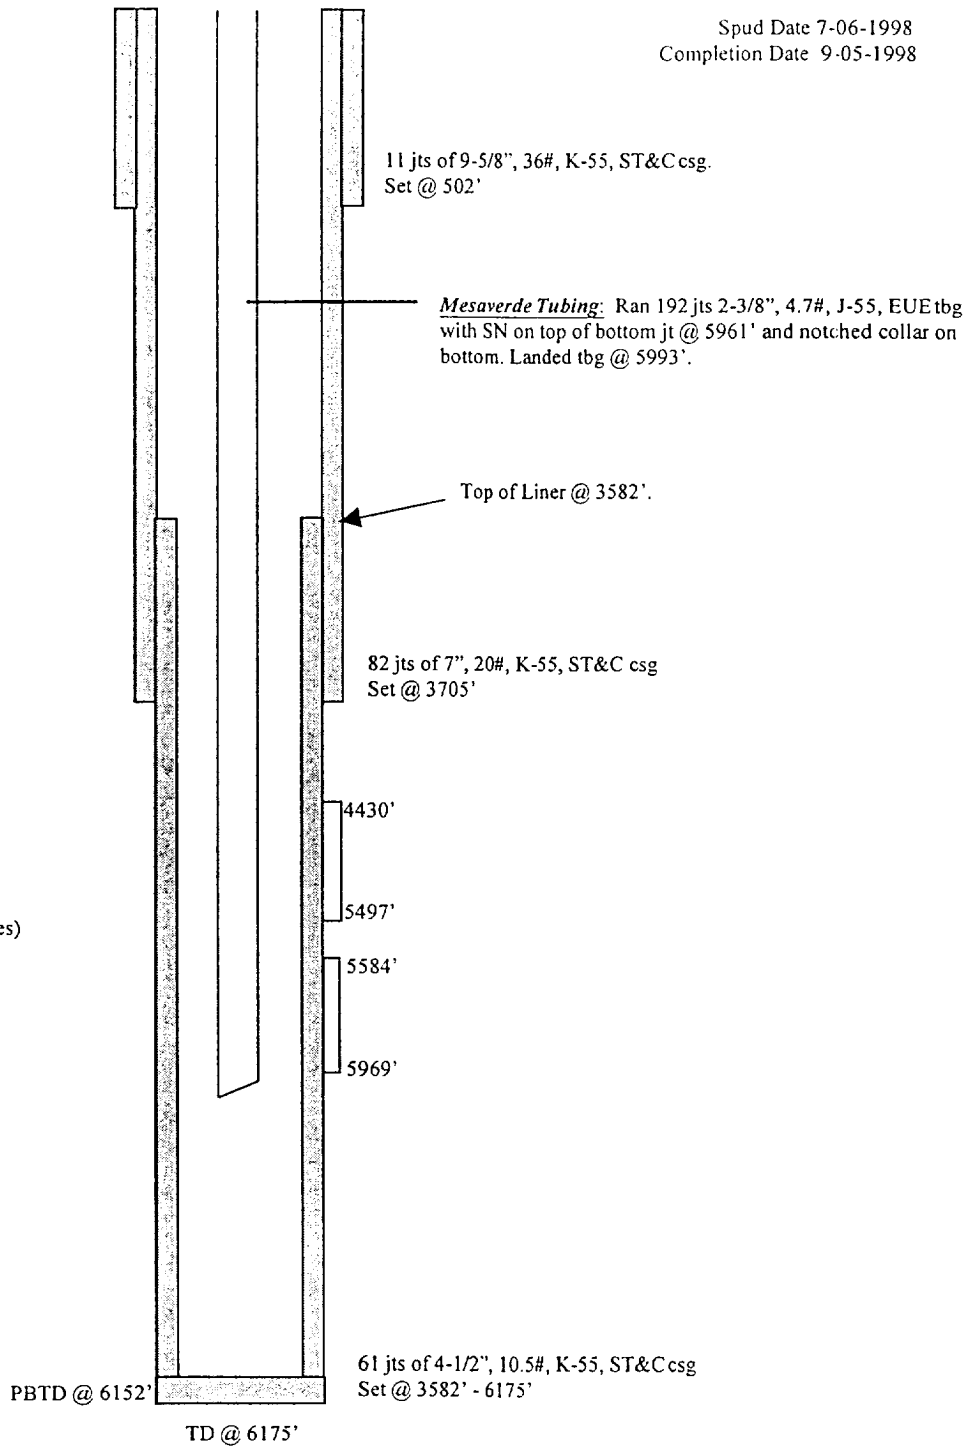

HOLE SIZE	CASING	CEMENT	CMT TOP
12 - 1/4 "	9 - 5/8 "	3 0 0 s x	S U R F A C E
8 - 3/4 "	7 "	6 7 0 s x	S U R F A C E
6 - 1/4 "	4 - 1/2 "	3 1 0 s x	3 5 8 2' (C B L)