
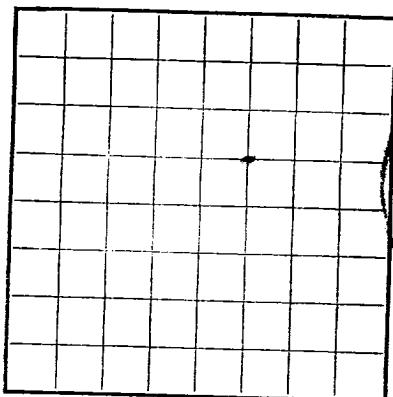




LOCATE WELL CORRECTLY

U. S. LAND OFFICE Santa Fe

SERIAL NUMBER _____

LEASE OR PERMIT TO PROSPECT 11-20-603-73

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

JUN 1 1959

LOG OF OIL OR GAS WELL

Company The Atlantic Refining Co. Address Box 520, Casper, WyomingLessor or Tract Tribal (Navajo) Field Hermeshee Gallup State New MexicoWell No. 35 Sec. 29 T. 31N R. 16W Meridian 11N County San JuanLocation 1900 ft. N of 1/4 Line and 1900 ft. E of 1/4 Line of Sec. 29 Elevation 5140 800L
(Derrick floor relative to level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed R. P. CurryDate 6-2-59 Title District Clerk

The summary on this page is for the condition of the well at above date.

Commenced drilling 5-23, 1959 Finished drilling 6-2, 1959

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1231 to 1240 No. 4, from _____ to _____No. 2, from 1246 to 1252 No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____

No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>5 1/2</u>	<u>20.4</u>	<u>11.5</u>	<u>115</u>	<u>140</u>	<u>Pump - Plug</u>	<u>8.9</u>			
<u>5 1/2</u>	<u>20.4</u>	<u>11.5</u>	<u>140</u>	<u>140</u>	<u>Pump - Plug</u>	<u>8.9</u>			

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>5 1/2</u>	<u>10.4</u>	<u>115</u>	<u>Pump - Plug</u>	<u>8.9</u>	
<u>5 1/2</u>	<u>20.4</u>	<u>140</u>	<u>Pump - Plug</u>	<u>8.9</u>	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 1320 feet, and from _____ feet to _____ feet

DATES

Put to producing _____, 1959The production for the first 24 hours was _____ barrels of fluid of which 67 % was oil; 59 % emulsion; _____ % water; and _____ sediment. Gravity, °Bé. 23.0If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas 41.0

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller

_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u> <u>1196</u>	<u>1196</u> <u>1135</u>		<u>Navajo</u> <u>Gallup</u>
<u>First Fracture Treatment</u>			
<u>Treated perforations 1231-1240 w/ 10,000 10/20 sand and 23,646 gals. 100% crude. Ave. brtg. press. 1300 at 22 WPM.</u>			
FROM—	TO—	TOTAL FEET	FORMATION

