

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.

14-20-604-83

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Ute Mountain Tribal

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Ute Mountain Tribal

9. WELL NO.

#11

10. FIELD AND POOL, OR WILDCAT

Verde Gallup

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 21, T-31N, R-14W

12. COUNTY OR PARISH

13. STATE  
New Mexico

San Juan

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Benson-Montin-Greer Drilling Corp.

3. ADDRESS OF OPERATOR

221 Petroleum Center Building, Farmington, NM 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface

639' FNL, 500' FEL, Sec. 21, T-31N, R-14W

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

5707' GR

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT\*

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Operator requests approval to plug and abandon.

See attachment for plugging and abandoning procedure.

RECEIVED  
NOV 20 1983

RECEIVED  
Bureau of Land Management

NOV 14 1983

Durango, Colorado

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Vice-President

DATE November 10, 1983

(This space for Federal or State office use)

APPROVED BY David J. Miller

TITLE

Area Manager


DATE NOV 21 1983

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

14-20-604-00

Well No. 11 NENE 21-31N-14W

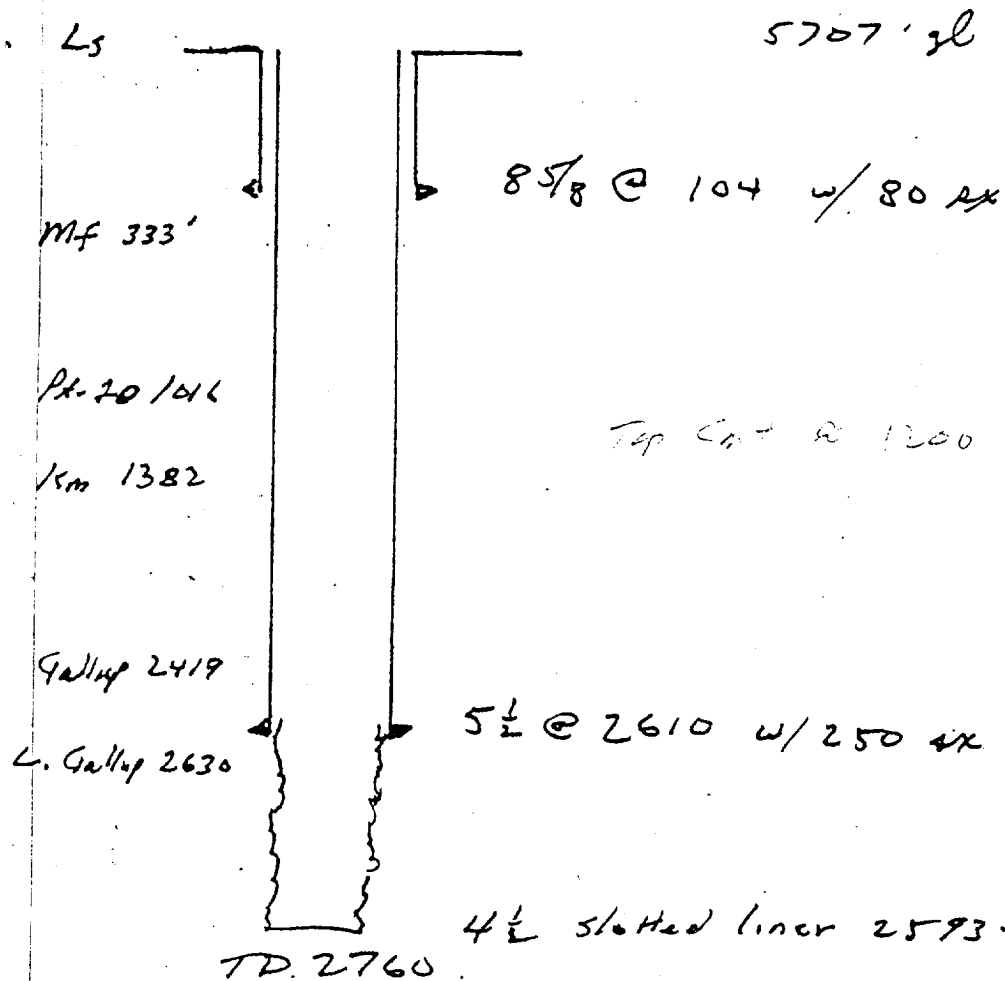

9.5 #/gal or heavier fresh gel mud between plugs

1. Spot a 200' cement plug from 2760' TD to 2560'
2. Spot a 100' cement plug from 1430 to 1330' inside 5 1/2" casing across top of Mancos.
3. Cut and pull 5 1/2" casing. Calculated top of cement is approximately 1200'.
4. Spot a 100' cement plug, 50' inside the casing and 50' on top of the cut off.
5. Spot a 160' cement plug from 160' to surface.

6. Cut off  $8\frac{5}{8}$ " casing below ground level.  
Weld a  $\frac{1}{4}$ " steel plate across  $8\frac{5}{8}$ " casing.  
Erect P & A marker. Clean and restore  
surface. Restoration and seeding  
requirements will be forthcoming.

If.  $5\frac{1}{2}$ " casing cannot be cut and pulled

3. Perforate  $5\frac{1}{2}$ " casing at 140'. Establish  
circulation to surface through  $5\frac{1}{2}$ " by  $8\frac{5}{8}$ "  
annulus. Circulate cement to surface.
4. Spot a 50' cement plug from 50' to surface  
inside  $5\frac{1}{2}$ " casing.
5. Cut off casings below ground level.  
Weld a  $\frac{1}{4}$ " steel plate across  $8\frac{5}{8}$ "  
casing. Erect P & A marker. Clean  
and restore surface. Restoration and  
seeding requirements will be forthcoming

CAS/10-31-83