

MARCOTTE GAS COM 1 **BLANCO MESAVERDE POOL**

API 30-045-11067

FLAC # 924268-01


LOCATION S5 T31N R10W

**INSTALLATION OF INDIVIDUAL WELLHEAD COMPRESSOR
 COMPLETED 9/16/98**

PRODUCTION TABLE

Aug-97	13305
Sep-97	12806
Oct-97	12175
Nov-97	12704
Dec-97	11349
Jan-98	12432
Feb-98	11733
Mar-98	12729
Apr-98	12396
May-98	12858
Jun-98	11763
Jul-98	11540
Aug-98	10045
Sep-98	12730
Oct-98	12129
Nov-98	13244
Dec-98	13883
Jan-99	14821
Feb-99	13527
Mar-99	11708

DECLINE CURVE

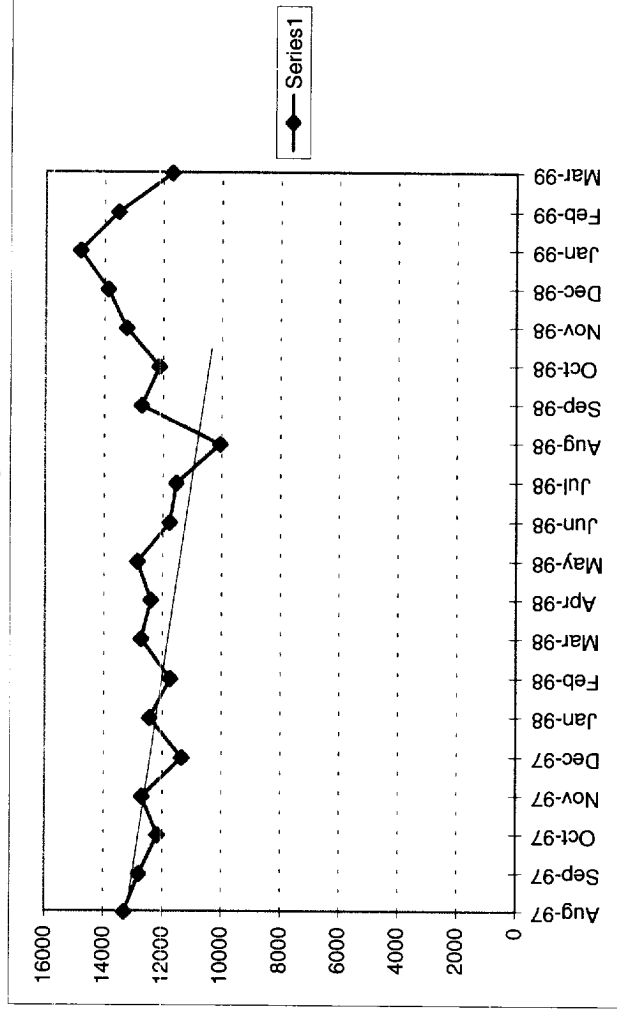

INSTALLED INDIVIDUAL WELLHEAD COMPRESSOR TO INCREASE PRODUCTION.

GROUND BED ABANDONMENT

WELL NAME: MARCOLE G.C. #1

LOCATION: SE/NE S4-31N-10W

- 1) Weld 6 " dia. spool with diverter line to pit
- 2) MIRU
- 3) Wash in hole with 1 1/4" work string. Circulate out coke breeze. Pull anodes as they come free. Wash hole to TD ft.
- 4) Pump * sx of neat cement w/ 1/4 lb. sk. Flocele. Pull out work string.
- 5) Top off hole with cement, set flexible pipeline marker as PxA marker.
- 6) RDMO

Ground Bed Specifications

TD _____ ft.

Hole Dia. _____ inches.

Casing Dia. _____ inches

Casing Length _____ ft.

} UNKNOWN

$$\text{Sacks of cement} = (\text{dia.})^2 \times \text{TD} \times .00693$$

where dia. is in inches,
TD is in feet

JAB.GRA