

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> WELL		5. LEASE DESIGNATION AND SERIAL NO. SF-077651
2. NAME OF OPERATOR Southland Royalty Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR P. O. Drawer 570, Farmington, New Mexico		7. UNIT AGREEMENT NAME
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 800' FNL & 1000' FEL		8. FARM OR LEASE NAME Richardson
14. PERMIT NO.		9. WELL NO. #6-A
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 6321' GL		10. FIELD AND POOL, OR WILDCAT Blanco Mesa Verde
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Section 22, T31N, R12W
		12. COUNTY OR PARISH San Juan
		13. STATE New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
(Other) ☐

PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
ABANDON\* ☐  
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:


WATER SHUT-OFF ☐  
FRACTURE TREATMENT ☐  
SHOOTING OR ACIDIZING ☐  
(Other) ☒ Spud & Casing Report

REPAIRING WELL ☐  
ALTERING CASING ☐  
ABANDONMENT\* ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

4-21-78 Spudded 12-1/4" surface hole to a TD 225'. Ran 5 joints of 9-5/8", 36#, K-55 casing set at 221'. Cemented with 110 sacks Class "B" with 1/4# gel flake per sack and 3% CaCl<sub>2</sub>. Cement circ to surface. Plug down at 4:30 PM 4-21-78.

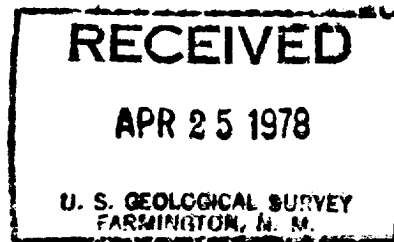

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE District Production Manager

DATE April 24, 1978

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: