SUBMIT IN TRIPLICATE*

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES

DEPARTMENT OF THE INTERIOR					5. LEASE DESIGNATION	-23905 AND SEBIAL NO.			
GEOLOGICAL SURVEY					SF 078389-	Α			
	N FOR PERMIT	TO DRILL,	DEEP	EN, OR PL	.UG B	ACK	6. IF INDIAN, ALLOTTE	OR TRIBE NAME	
1a. TYPE OF WORK DR	ILL×	DEEPEN		PLU	G BAC	CK 🗆	7. UNIT AGREEMENT N	AME	
b. TYPE OF WELL OIL G WELL WELL 2. NAME OF OPERATOR	SAS VELLX OTHER		S	INGLE TONE	MULTIP ZONE	re 🗌	San Juan 3 8. FARM OR LEASE NA	2-9 Unit	
	tural Gas Co	mpany			·		San Juan 3	2-9 Unit	
	Farmington	NIM 074	0.1				97 10. FIELD AND POOL, O	UP WAY DOLLE	
4. LOCATION OF WELL (R At surface	, Farmington Report location clearly an	d in accordance wi	th any &	State requiremen	ts.*)		Blanco Pic	-	
At proposed prod. zor	1840'N, 95	0'W -				-	11. SEC., T., R., M., OR I AND SURVEY OR AS NMPM	Ext.	
14. DISTANCE IN MILES	AND DIRECTION FROM NEA	AREST TOWN OR POS	T OFFIC	E*			Sec. 12, T-3	1-N, R-10-W	
Approx. 15	miles NE of	Aztec, N	M				San Juan	NM	
15. DISTANCE FROM PROP- LOCATION TO NEARES	OSED*			O. OF ACRES IN I	EASE		F ACRES ASSIGNED	/	
PROPERTY OR LEASE I (Also to nearest dr) 18. DISTANCE FROM PROPERTY	g. unit line, if any)	950 '	10 70	Unit			137.90		
TO NEAREST WELL, D OR APPLIED FOR, ON TH	ORILLING, COMPLETED,	3017 '			Rotar	OTARY OR CABLE TOOLS			
21. ELEVATIONS (Show wh	ether DF, RT, GR, etc.)		1			Trocar	22. APPROX. DATE WO	RK WILL START*	
6303'GL									
		PROPOSED CASI	NG ANI	CEMENTING	PROGRA	. M	-		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER F		SETTING DE	РТН		QUANTITY OF CEMEN	T	
12 1/4" 6 3/4"	8 5/8" 2 7/8"	24.0#	·	120'		106 c	u.ft. to ci	rculate	
0_3/4	2 1/0	7.4#		3285 '		-552_C	u.ft.to cov	er Ojo Al ar	
A 3000 psi blind and phind	y perforate WP and 6000 pipe rams wi s dedicated. f Section 12 FROPOSED PROGRAM: If drill or deepen direction y.	psi test ll be used is dedica proposal is to deep	dou d fo	ble gate r blow o - to this	prevut pr	venter revent	equipped with a second control of the second	ith well. d new productive s. Give blowout	
(This space for Fede	eral or State office use)	TIT	LE	Drill	ing (Clerk	DATE Janua	ary 16,1978	
PERMIT NO.	in or state outer use)								
EBBMIF NU.				APPROVAL DATE _					
APPROVED BYCONDITIONS OF APPROV	AL, IF ANY:	TIT	'LE				DATE		
Ob	la (_					

Form C-102 Supersedes C-128 Effective 1-1-65

		All distances must be f	rom the outer boundaries of	the Section.		
Operator EL	PASO NATURAL	GAS COMPANY	Legse SAN JUAN 32-9 (NIT (SF-078389-A)	Well No. 97	
Unit Letter E	Section 12	Township 31-N	Range 10-W	County SAN J	UAN	
Actual Footage Loc 1840		NORTH line and	950	et from the WEST	line	
Ground Level Elev. 6303			P∞l		cuted Acreage: 137.90	
1. Outline th	ie acreage dedica	ted to the subject we	ell by colored pencil o	or hachure marks on the pl	at below.	
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).						
		ifferent ownership is o initization, force-pooli		have the interests of all	owners been consoli-	
🔀 Yes	☐ No If a	nswer is "yes;" type o	f consolidation	- Unitization -		
	is "no," list the f necessary.)	owners and tract desc	riptions which have a	ctually been consolidated.	(Use reverse side of	
No allowai	ble will be assign			consolidated (by communi ch interests, has been app		
		N N	!	CE	RTIFICATION	
			i 1	1 1	r that the information con-	
	1840		1	Wignal Sig		
	 	}		Name W. G. Br Drilling Position		
950'	5		!	El Paso I	Natural Gas Co.	
J	F-078389-A			January Date	16, 1978	
		SECTION 12	<u>i</u>			
				shown on this notes of actua under my super	fy that the well location plat was plotted from field I surveys made by me or vision, and that the same princt to the best of my	
	-			knowledge and		
	1 1			Date Surveyed SEPTI Registered Profe and/astruni Surv	•	
0 330 660	90 1320 1650 19	30 2310 2540 2000	1500 1000	Certificato No.	1760	



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401

PHONE: 505-325-2841

Multi-Point Surface Use Plan

San Juan 32-9 Unit #97

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

 All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2
- 4. Location of Tank Batteries, Production Facilities, and Production
 Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering
 lines. Map No. 1 shows the existing roads and
 new proposed access roads. All known production
 facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a water hole located at Cedar Hill Ditch.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.

- Methods of Handling Waste Materials All garbage and trash 7. materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1 will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.
- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed Mixture #2 will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted brown (Federal Standard #595-30318)
- 11. Other Information The terrain is sandstone ledges and rolling hills covered with pinon and cedar. Deer graze the proposed project site.

- 12. Operator's Representative W. D. Dawson, Post Office Box 990, Farmington, New Mexico 87401
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

January 13, 1978

D. R. Read

Division Drilling Engineer

DRR:pb

Operations Plan - San Juan 32-9 Unit #97

I. Location: 1840'N, 950'W, Section 12, T-31-N, R-10-W, San Juan County, NM

Field: Blanco Pictured Cliffs Ext. Elevation: 6303'(

II. Geology:

A. Surface Formation: San Jose

Sub-surface	Formation Tops:		
Ojo Alamo	1475'	Pictured Cliffs	3118'
Kirtland	1535 '	Lewis	3245'
Fruitland	2705'	Total Depth	3285 '

- B. Logging Program: Induction Electric and Gamma Ray Density at TD.
- C. Coring: none
- D. Testing: none

III. Drilling:

A. Anticipated Starting Date and Duration of the Project:

1978 Drilling Program - approximately 4 days to complete.

B. Circulating Medium: Treated water and a low solids gel base mud will be used from surface to TD.

IV. Materials:

Α.	Casing Program:	Hole Size	Depth	Csg.Size	Wt.&Grade
		12 1/4" 6 3/4"	120 ' 3285'	8 5/8" 2 7/8"	24.0# J-55 6.4# J-55

B. Float Equipment: 8 5/8" surface casing - cement quide shoe.

2 7/8" production casing - 10' shoe joint with notched collar for guide shoe and 2 7/8" latch down baffle on top. Two 3 1/16" balls and one 2 7/8" latch down plug.


- C. Tubing: none
- D. Wellhead Equipment: Larkin wellhead (fig. 75)

V. Cementing:


- 8 5/8" surface casing 90 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (106 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing wellhead and BOP to 600#/ 30 minutes.
- 2 7/8" production 303 sks. 65/35 Class "B" Poz with 12% gel and 15.52 gallons water per sack followed by 50 sks.Class "B" neat cement (552cu.ft. slurry, 50% excess to cover Ojo Alamo). Run temperature survey after 12 hrs

248 Jus


75.2.100

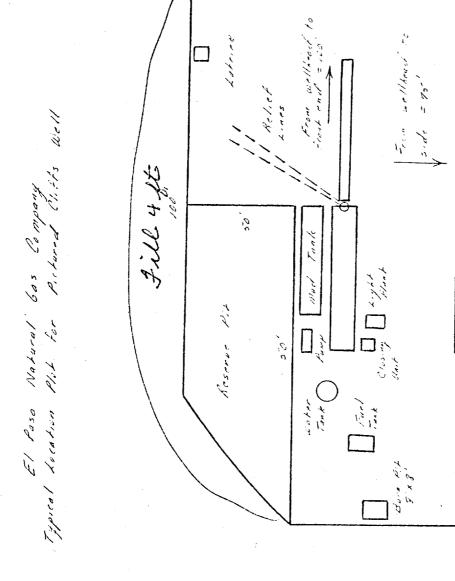

Typical Mud Drilled B.O.P. Installation for Pictured Clifts Well

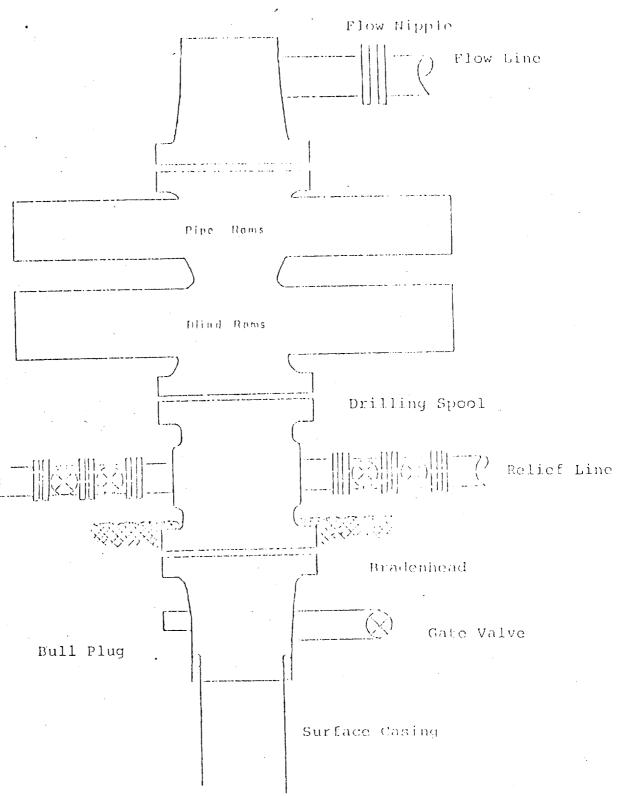


8" Series 900 Double Gate BOP, rated at 3000 psi Working Pressure

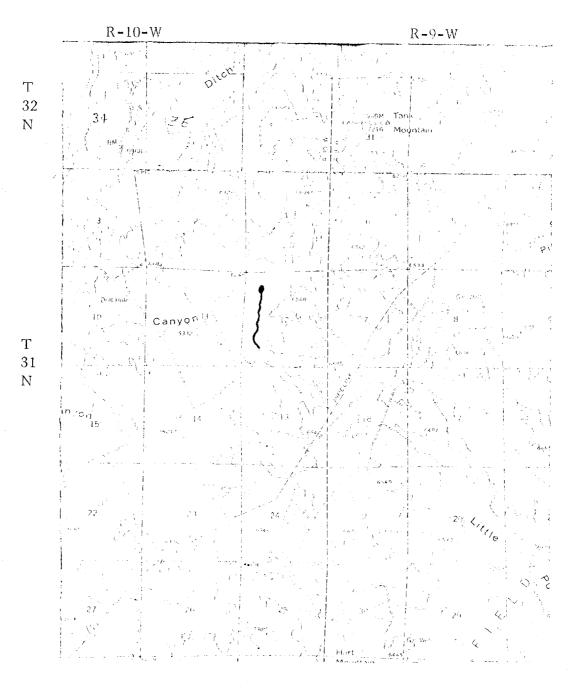

MAP #1

IMMEND OF RECHE-OF-HAVS

THISTIME	ROADE			****
FXIGHTNG	PIERTINS		-4-	
EXISTENS	DOOD A PEDELLER	1-1	•	·
PROPOSED	ROADS			
	PHERMAN		-	+
TROPOSED	ROME FILLINGE	· -		-

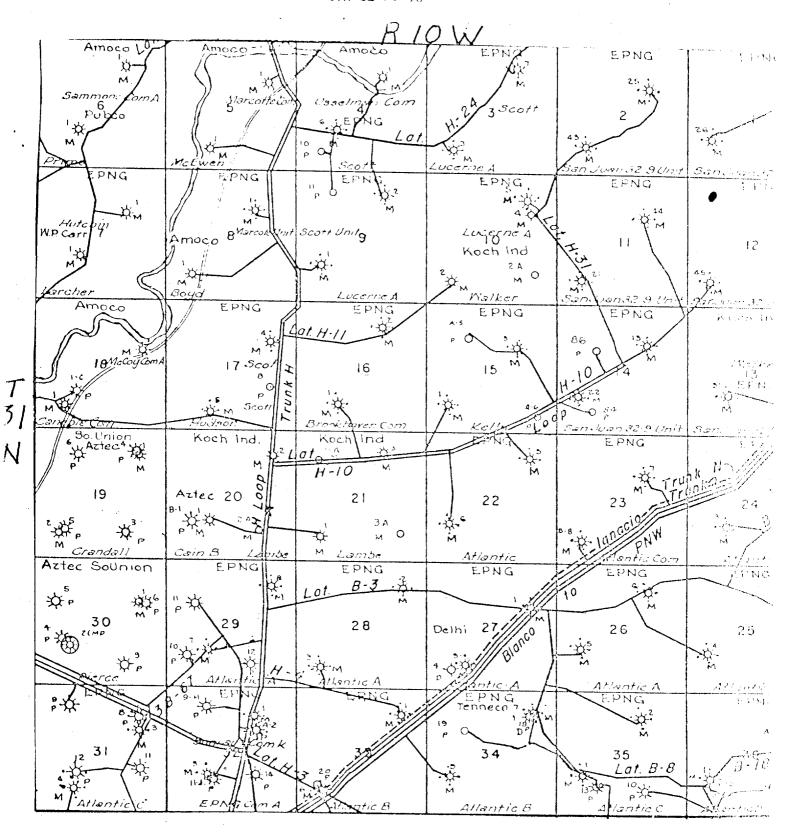

MAP #2