SUBMIT IN TRIPLICATE*

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES DEPARTMENT OF THE INTERIOR

(172) 2000)	UNIT DEPARTMENT	ED STATES OF THE IN		•	reverse si		30 - C: 75 - 33 9//
		SICAL SURVE					NM 01594
APPLICATION	FOR PERMIT T			N, OR I	LUG B	ACK	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
	L×	DEEPEN []	PL	UG BAC	K 🗆	7. UNIT AGREEMENT NAME San Juan 32-9 Unit
b. TYPE OF WELL OIL GAS WELL WE. 2. NAME OF OPERATOR	LLX OTHER		81 20	NGLE X	MULTIP	LE	8. FARM OR LEASE NAME San Juan 32-9 Unit C
	ural Gas Com	pany					9. WELL NO.
3. ADDRESS OF OPERATOR	T	NIM 9740	7				83 10. FIELD AND POOL, OR WILDCAT
PO BOX 990,	Farmington,	in accordance with	ı any S	tate requirem	ents.*)		Blanco Pictured Clif
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*) At surface 1450'S, 1800'E					11. SEC., T., B., M., OR BLK. SeC. 14, T-31-N, R-10-V		
At proposed prod. zone						!	NMPM
14. DISTANCE IN MILES AT				c.•			12. COUNTY OR PARISH 13. STATE
	miles NE of	Aztec, NM		, OF ACRES II	V LEASE	17. No. 0	San Juan NM OF ACRES ASSIGNED
15. DISTANCE FROM PROPOS LOCATION TO NEAREST PROPERTY OR LEASE LI	NE, FT.	1450'	10. 110	Unit			158.20
(Also to nearest drlg. 18. DISTANCE FROM PROPO TO NEAREST WELL, DR OR APPLIED FOR, ON THIS	unit line, if any) SED LOCATION* ILLING, COMPLETED,	2514'	19. PR	OPOSED DEPTE		20. ROTA Rotar	RY OR CABLE TOOLS
21. ELEVATIONS (Show whet 6311 GL						<u>'</u>	22. APPROX. DATE WORK WILL START*
23.	P	ROPOSED CASIN	G ANI	CEMENTIN	G PROGRA	M	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FO	ОŤ	SETTING	DEPTH		QUANTITY OF CEMENT
12 1/4"	8 5/8"	24.0#		120		-(cu.ft. to circulate
6 3/4"	2 7/8"	6.4#		3245	<u> </u>	604	cu.ft.to cover Ojo Ala
A 3000 psi blind and p	WP and 6000	psi test	dou	ble gat	e pre	vente: reven	tured Cliffs formation requipped with tion on this well.
			. 7			\	JAN 19 1970 L COM, COM, DIST 3
	Section 14						
IN ABOVE SPACE DESCRIBE zone. If proposal is to o preventer program, if any	lrill or deepen directiona	proposal is to deep lly, give pertinent	en or j data (plug back, giv on subsurface	e data on p locations a	resent proc nd measure	ductive zone and proposed new productive and true vertical depths. Give blowout
24.	9. Busco	TIT	'LE	Dri	lling	Clerk	
(This space for Feder	al or State office use)						
PERMIT NO.				APPROVAL DA	TE		
APPROVED BY		TIT	LE				DATE
CONDITIONS OF APPROVA	AL, IF ANY:						

*See Instructions On Reverse Side

NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102 Supersedes C-128 Effective 1-1-65

		All distances must be	from the outer bound	ries of the Section	n.			
<u> </u>								
Unit Letter J	Section 14	Township 31-N	Range 10-1	County	UL NAS	AN		
Actual Footage Loc 1450		SOUTH Hine and	1800	feet from the	EAST	line		
Ground Level Elev. 6311	Producing Form	mation ED CLIFFS	Pool BLANCO	PICTURED C	Dedica	ted Acreage: 58,20		
1. Outline th	1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.							
2. If more th interest an	2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).							
3. If more that dated by co	n one lease of di ommunitization, u	fferent ownership is nitization, force-pool	dedicated to the ing. etc?	well, have the	interests of all ov	vners been consoli-		
Yes	☐ No If an	swer is "yes;" type	of consolidation	Unit	ization			
If answer i	s "no," list the c	owners and tract des	criptions which h	ave actually be	en consolidated. (I	Jse reverse side of		
No allowab	le will be assigne	d to the well until al	l interests have l	peen consolida	ted (by communitie	ration unitiration		
forced-pool sion.	ing, or otherwise)	or until a non-standa	d unit, eliminatir	ng such interes	ts, has been approv	red by the Commis-		
					CERT	FICATION		
			1		l e	at the information con-		
			1		tained herein is to best of my knowle	ue and complete to the dige and belief.		
	1				Original :	_		
	- +					Brisco		
	1				Drilling Cl			
·	1		İ		Compony	ural Gas Co.		
	İ				January 16,	1978		
		SEC			ļ			
		N T				• •		
1		M	NM-0159 ¹ 1		3	hat the well location was plotted from field		
			1		nates of actual su	on, and that the same		
		/ X	0 1 180		is true and corre	t to the best of my		
	~ 	/ //			knowledge and beli	ef.		
	The second secon				Date Surveyed			
		N N	NM.	-0608	· ·	er 29, 1977		
					Registered Professionand/or Land Surveyor	nai Engineer		
V 4		XI			1.01			
0 330 660 90					Certificate No. 1	760		
D 330 660 90	D 1320 1650 1980	2310 2640 2006	1500 1000	500 0	f ·	ì		



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401

PHONE: 505-325-2841

Multi-Point Surface Use Plan

San Juan 32-9 Unit #83

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

 All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2
- 4. Location of Tank Batteries, Production Facilities, and Production
 Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering
 lines. Map No. 1 shows the existing roads and
 new proposed access roads. All known production
 facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a water hole located at Hart Canyon Water Well.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.

- Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1 will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.
- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed Mixture #2 will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted green (Federal Standard #595-34127)
- 11. Other Information The terrain is rolling hills and sagebrush flats covered with sage brush. Cattle graze the proposed project site.

- 12. Operator's Representative W. D. Dawson, Post Office Box 990, Farmington, New Mexico 87401
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

January 13, 1978

D. R. Read

Division Drilling Engineer

DRR:pb

Operations Plan - San Juan 32-9 Unit Com #83

I. Location: 1450'S, 1800'E, Section 14, T-31-N, R-10-W, San Juan County, NM

Field: Blanco Pictured Cliffs <u>Elevation:</u> 6311'GL

II. Geology:

A. Surface Formation: Nacimiento

Sub-surface Formation Tops:

Ojo Alamo	1265'	Pictured Cliffs	3096'
Kirtland	1355'	Lewis	3206'
Fruitland	2715'	Total Depth	3245'

- B. Logging Program: Induction Electric and Gamma Ray Density at TD.
- C. Coring: none
- D. Testing: none

III. Drilling:

A. Anticipated Starting Date and Duration of the Project:

1978 Drilling Program - approximately 4 days to complete.

B. Circulating Medium: Treated water and a low solids gel base mud will be used from surface to TD.

IV. Materials:

A. Casing	Program:	Hole Size	Depth	Csg.Size	Wt.&Grade
		12 1/4"	120'	8 5/8"	24.0# J-55
		6 3/4".	3245 '	2 7/8"	6.4# J-55

B. Float Equipment: 8 5/8" surface casing - cement guide shoe.

2 7/8" production casing - 10' shoe joint with notched collar for guide shoe and 2 7/8" latch down baffle on top. Two 3 1/16" balls and one 2 7/8" latch down plug.

- C. Tubing: none
- D. Wellhead Equipment: Larkin wellhead (fig. 75)

V. Cementing:


8 5/8" surface casing - 90 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (106 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing wellhead and BOP to 600#/30 minutes.

2 7/8" production - 336 sks. 65/35 Class "B" Poz with 12% gel and 15.52 gallons water per sack followed by 50 sks.Class "B" neat cement (604cu.ft. slurry, 50% excess to cover Ojo Alamo). Run temperature survey after 12 hrs

Frem wellhouse to 3. de = 13. File 2 ft cut 3 ft 20, Tunk 230 1 50 160 Reserve Pir 0,0 Tuel Tank


El Pasa Natural Gas Company Typical Lucation Plat for Perturned Clift's Well

Typical Mud Drilled B.O.P. Installation for Pictured Cliffs Well

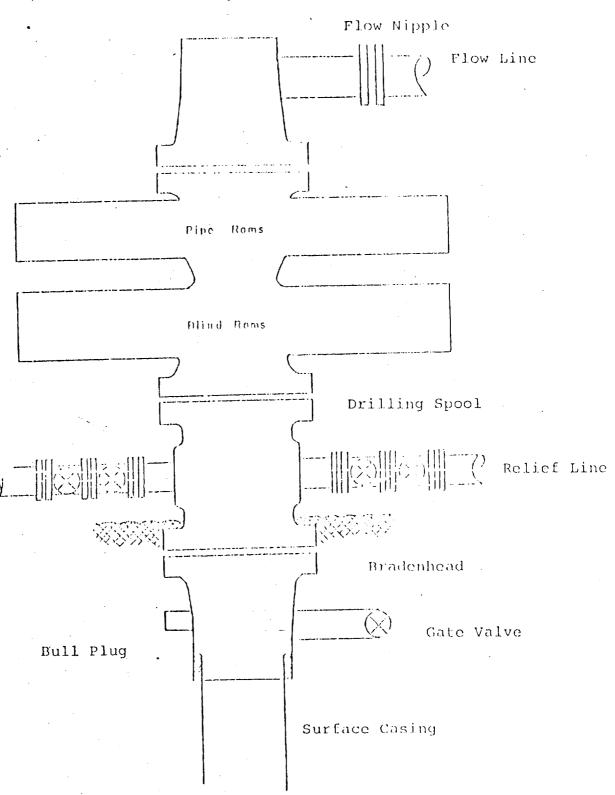

8" Series 900 Double Gate BOP, rated at 3000 psi Working Pressure

EL PASO NATURAL CAS COMPANY San Juan 32-9 Unit #83 SE 14-31-10

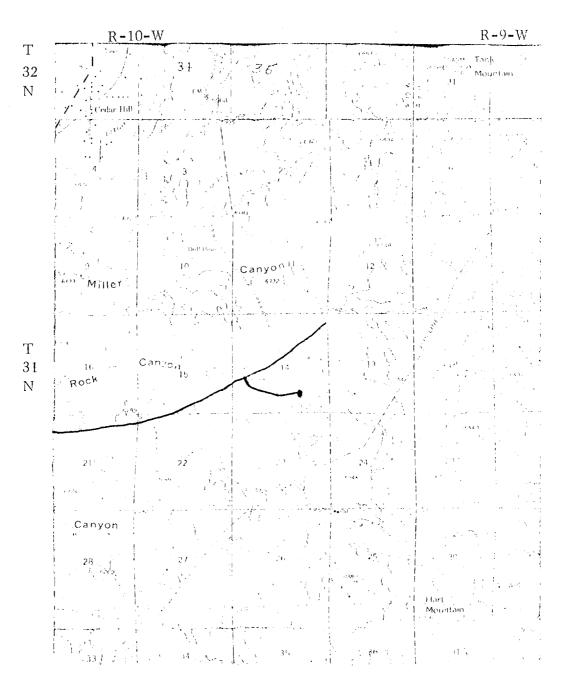


MAP #1

Profile on Shark-Ca-TVG.

RETERE	ROADA			
EXISTUG	PERSONA	-1-	₩.	-4-
FKISTING	nom o thistary	- :	t -	. 4.
IROFORUD	ROMB			
PROPESSO	3 F3 (17)(E8)(C)	+-	+	+
TROPOSED	ROAD PUTFIG D	· -		

EL PASO NATUR AL CAS COMPANY . San Juan 32-9 Unit #83 SE 14-31-10

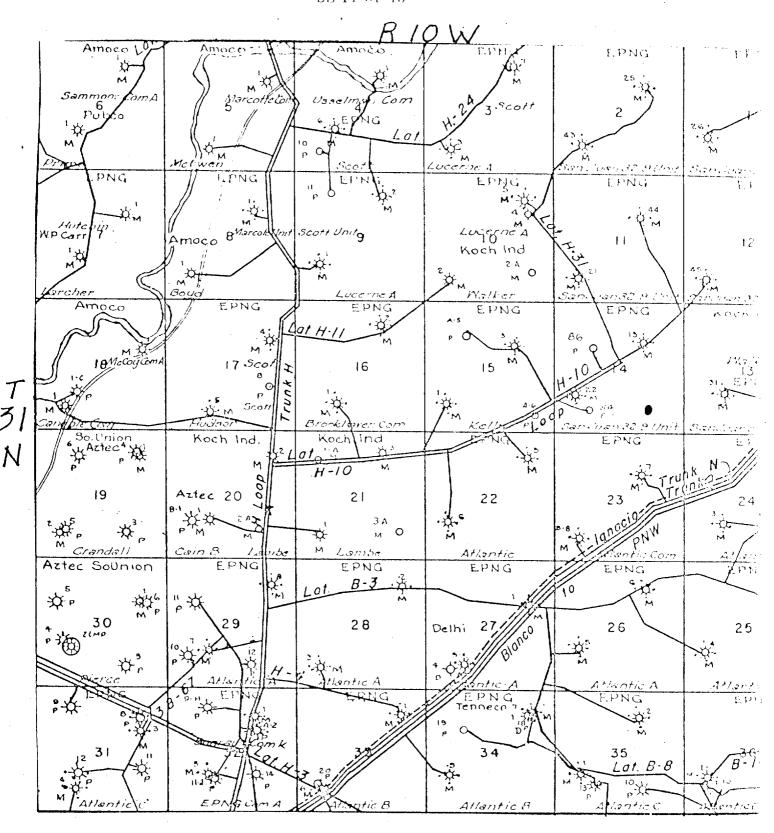

MAP #2