

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or deepen a plug back to a different reservoir. Use Form 9-331-C for such proposals.)

**RECEIVED**  
FEB 11 1985  
OIL CON. DIV.  
DIST. 3

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR  
Southland Royalty Company


3. ADDRESS OF OPERATOR  
P.O. Drawer 570, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 910' FSL & 1590' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:  
TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

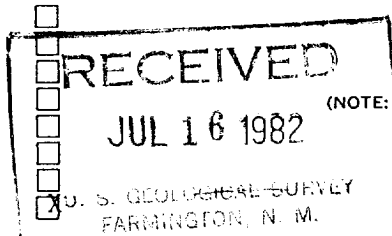

5. LEASE  
SF-078039-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Primo Mudge

9. WELL NO.  
#2

10. FIELD OR WILDCAT NAME  
Blanco Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Section 24, T32N, R11W

12. COUNTY OR PARISH  
San Juan

13. STATE  
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6336' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

- 6-29-82 Set cement retainer at 1520'. Tripped in hole with 1-1/2" tubing.
- 6-30-82 Stung into retainer. Squeezed Pictured Cliffs with 65 sacks at 2-1/2 BPM at 2000 pounds. Perf'd at 1390'. Squeezed 50 sacks across Ojo-Alamo.
- 7-1-82 Placed 5 sacks cement plug inside 2-7/8" casing from 270' to 170'. Cement plug inside casing from 50' to surface. Squeeze bradenhead with 25 sacks Class "B" and displaced to 170'. Cut off well head & cement annulus from 50' to surface with cement plug. Installed dry hole marker.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *Harry A. Kelly* TITLE Secretary DATE July 14, 1982

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

APPROVED  
AS AMENDED

Approved as to plugging of the well bore.  
Liability under bond is retained until  
surface restoration is completed.

\*See Instructions on Reverse Side

NMOCC

FEB 06 1985  
*Tom Keller*  
M. MILLENBACH  
AREA MANAGER