SUBMIT IN TRIPLICATE*

Form approved.

(Other instructions on reverse side)

	Bu	ıdge	t	Bure	au	No	. 42	2–R1	42	5.
3	<u> </u>		Ĉ	9	S	٠.	-	3	/ `	7

UNII	ED SIA	IES .
DEPARTMENT	OF THE	E INTERIOR

5. LEASE DESIGNATION AND SERIAL NO. **GEOLOGICAL SURVEY** SF 078096 6. IF INDIAN, ALLOTTER OR TRIBE NAME APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK 1a. TYPE OF WORK 7. UNIT AGREEMENT NAME DRILL 🖺 DEEPEN [PLUG BACK b. TYPE OF WELL MULTIPLE X WELL E SINGLE ZONE WELL S. FARM OR LEASE NAME OTHER 2. NAME OF OPERATOR Mudae 9. WELL NO. El Paso Natural Gas Company 3. Al-DRESS OF OPERATOR 14A PO Box 990, Farmington, NM 10. FIELD AND POOL, OR WILDCAT 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*) Blanco MV&Aztec PC E 1560'N, 1685'W 11. SEC., T., B., M., OR BLK.

AND SURVEY OR AREA

Sec. 21, T-31-N, R-11-W At proposed prod. zone NMPM same 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 12. COUNTY OR PARISH | 13. STATE 5 1/2 miles North of Aztec, NM San Juan 15. DISTANCE FROM PROPOSED® 16. NO. OF ACRES IN LEASE 17. NO. OF ACRES ASSIGNED TO THIS WELL LOCATION TO NEAREST FROPERTY OR LEASE LINE, FT. (Also to nearest drig, unit line, if any) 955**'** 151.82 & 301.45 2512 18. DISTANCE FROM PROPOSED LOCATION® 19. PROPOSED DEPTH 20. ROTARY OR CABLE TOOLS TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 5194' 2500 Rotary 21. E.EVATIONS (Show whether DF, RT, GR, etc.) 22. APPROX. DATE WORK WILL START* 5094' GR $\overline{23}$. PROPOSED CASING AND CEMENTING PROGRAM SIZE OF HOLE SIZE OF CASING WEIGHT PER FOOT SETTING DEPTH QUANTITY OF CEMENT 13 3/4" 5/8" 9 200' 32.3# 224 cu.ft. to circulate 3/4" 7" 20.0# 2880' 462 cu.ft.to cover Ojo Alam 1/4" 4 1/2" 10.5# 2730-5194' 404 cu.ft.to fill to 2880' Selectively perforate and sandwater fracture the Mesa Verde and Pictured Cliffs formation. A 3000 psi WP and 6000 psi test double gate preventer equipped with blind and pipe rams will be used for blow out prevention of this This gas is dedicated. The N/2 of Section 21 is dedicated to this well IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any. 24 July 25,1978 Drilling Clerk SIGNED 2 TITLE . (This space for Federal or State office use) PERMIT NO.

CONDITIONS OF APPROVAL, IF ANY offrak

APPROVED BY

NEW MEXICO OIL CONSERVATION COMMISSION

WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section.									
Operator			Lease		Well No.				
	TURAL GAS CO	·	MUDGE	(SF-078096)	1111				
Unit Letter	Section	Township	Range	County					
F	21	31N	11W	San Juan					
Actual Footage Loc				-					
1560 Ground Lyvel Elev.	1560								
	Producing Fo		Pool Aztec Pictu		Dedicated Acreage:				
5904		CLIFFS-MEDA VE		Mesa Verde	151.82 & 301.45 cres				
2. If more th	an one lease is id royalty).	dedicated to the we	ll, outline each and i		thereof (both as to working				
Yes	No If a	nswer is "yes," type	of consolidation		f all owners been consoli-				
No allowab forced-pool sion.	le will be assign	ed to the well until al	l interests have been	consolidated (by cor	nmunitization, unitization, approved by the Commis-				
》	i		i	KI	CERTIFICATION				
	1560'	sr-(1809 6		tained he	certify that the information con- erein is true and complete to the my knowledge and belief. Lillard				
잡 ㅡ ㅡ ㅡ ㅡ				Name					
16851		M		Drilli Drilli	ng Clerk				
73 1005 · · ·) 0"-	Position					
潛	1	H	İ	El Pas	o Natural Gas Co.				
] 	Company July 2 Date	5, 1978				
(<u>[]</u>	i		i		· · · · · · · · · · · · · · · · · · ·				
				X X X /	,				
	 		1 ·	shown on notes of under my is true o	certify that the well location this plat was plotted from field actual surveys made by me or supervision, and that the same and correct to the best of my e and belief.				
				Este Surve June 1 Prod 3 Countegers	an Tr.				
0 330 660 90	1320 1650 1981	2310 2643 2000	1500 1000	3950	1000				



P. C. BOX 990 FARMINGTON, NEW MEXICO: 87401

PHONE: 505-325-2841

Multi-Point Surface Use Plan Mudge #14A

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

 All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from the Animas River.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rolling hills and sagebrush flats with sagebrush growing. Cattle graze the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

Don Walker

Project Drilling Engineer

Operations Plan Mudge #14A

I. Location: 1560'N, 1685'W, Section 21, T-31-N, R-11-W, San Juan County, NM Field: Blanco MV & Aztec PC Ext. Elevation: 5904'GR

II. Geology:

Α.	Formation	Tops:	Surface	Nacimiento	Lewis	2680 '
			Ojo Alamo	830'	Mesa Verde	4055'
			Kirtland	940'	Menefee	4330
			Fruitland	2125'	Point Lookout	4744'
			Pic.Cliffs	2520 '	Total Depth	5194'

- B. Logging Program: GR-Ind. and GR-Density at Total Depth.
- C. Coring Program: none
- D. Natural Gauges: 4045', 4320', 4735' and at Total Depth.
 Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

III. Drilling:

A. Mud Program: mud from surface to 2880'. Gas from intermediate casing to Total Depth.

IV. Materials:

Α.	Casing P	rogram: Ho	le Size		Casing Size	Wt.&Gi	rade
	-	$\frac{1}{13}$	3/4"	200'	9 5/8"	32.3#	H-40
		8	3/4"	2880 '	7"	20.0#	K-55
		6	1/4"	2730-5194'	4 1/2"	10.5#	K-55

7" intermediate casing - Pathfinder guide shoe (Part #1003-1-007) and Pathfinder self-fill insert float valve (Part #2010-6-007), 5 Pathfinder stabilizers (Part #107-10) every other joint above shoe. Run float two joints above shoe.

- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff. Pathfinder geyser shoe (Part #2017-1-050) and Larkin flapper type float collar (fig. 404 M&F).
- C. Tubing: 5194' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple one joint above bottom. Tubing will be open ended.

 2680' of 1 1/4", 2.33# IJ tubing with a common pump seating nipple above a perforated joint plugged on bottom. Isolate producing formations with a packer.
- D. Wellhead Equipment: 10" 900 x 9 5/8" casing head. 10" 900 x 6" 900 xmas tree.


V. Cementing:

- 9 5/8" surface casing use 190 sks. of Class "B" cement with 1/4# cel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.
- 7" intermediate casing use 212 sks. of 65/35 Class "B" Poz with 6% cel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (462 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.
- 4 1/2" liner precede cement with 20 barrels of gel water (2 sks. gel) Cement with 290 sks. of 50/50 Class "B" Poz with 2% gel, 0.6% Halad-9, 6.25# gilsonite plus 1/4# Flocele per sack (404 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.

3.7 136' Daw Rucks March Thank cut 10 st Muzi-31-11 P.C.MU File 8 ft 1,10,0


Sand Branco West

Well Name:

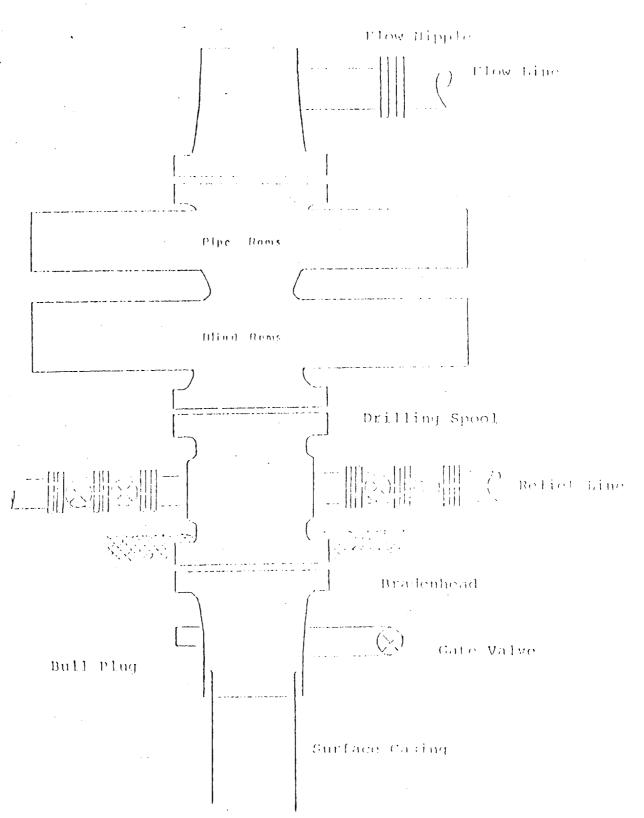

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure
When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line

EL PASO NATURAL GAS COMPANY Mudge #14A (PM) NW 21-31-11

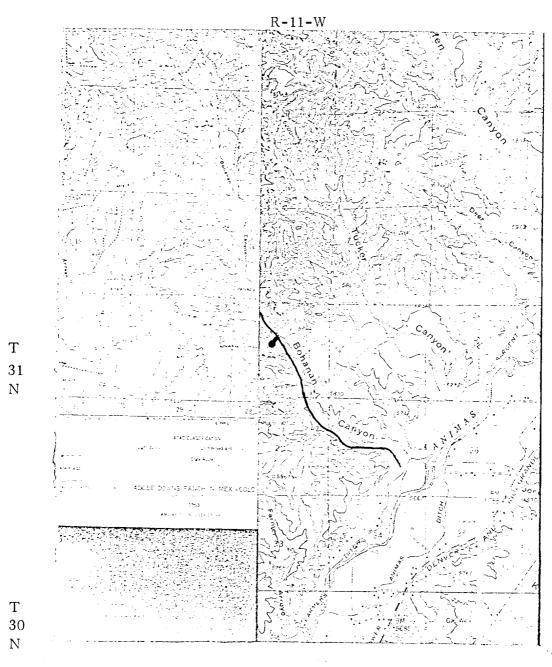


MAP #1

LEGEND OF RIGHT-OF-WAYS

EXISTING	ROADS	
EXISTING	PIPELINES	 + -+
EXISTING	ROAD & PIFELI	ME-+-+
PROPOSED	ROADS	
PROPOSED	PIPELINES	+++
PROPOSED	ROAD & PIPEL	INE -
		, ,

EL PASO NATURAL GAS COMPANY Mudge #14A (PM) NW 21-31-11

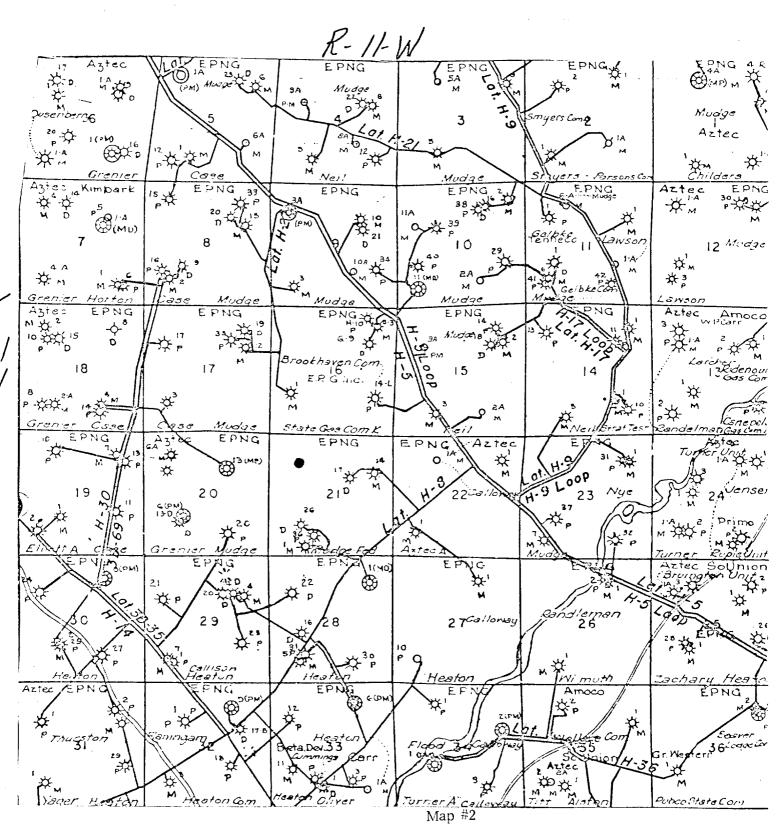

Proposed Location •