

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐
2. NAME OF OPERATOR
El Paso Natural Gas Company
3. ADDRESS OF OPERATOR
Box 289, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1030'S, 1030'E
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☒
☐
☐
☐
☐
☐
☐
☐

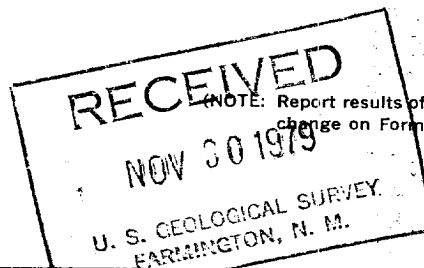

5. LEASE
SF 078483-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
Allison Unit

8. FARM OR LEASE NAME
Allison Unit

9. WELL NO.
11A

10. FIELD OR WILDCAT NAME
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 23, T-32-N, R-7-W
N.M.P.M.

12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6549 GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 11-17-79: Moved onto location. Squeezed holes at 6234, 6236'. Stung into cement retainer at 6228' with 2 3/8" tubing, pressure tested to 3500#, OK. Cemented w/ 89 cu. ft. cement. WOC. Squeeze hole at 6000'. RTTS packer at 5810'. Cemented w/ 59 cu. ft. cement. WOC.
- 11-18-79: Squeeze hole at 5450'. Set RTTS Packer at 5233'. Ran Cement Bond Log. Cemented w/ 80 cu. ft. cement. WOC.
- 11-19-79: Squeeze hole at 5415'. Set RTTS Packer at 5193'. Cemented w/ 118 cu. ft. cement.
- 11-21-79: PBSD 6242'. Tested casing to 3500#, OK. Ran Cement Bond Log. then perfed 5786, 5792, 5798, 5804, 5815, 5821, 5827, 5833, 5839, 5845, 5852, 5863, 5869, 5875, 5892, 5906, 5917, 5939, 6054, 6071, 6130, 6150, 6218' W/1 SPZ. Fraced w/ 121,000# 20/40 sand, 153,000 gal. wtr. Flushed w/ 8022 gal. wtr.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED A. G. Duisco TITLE Drilling Clerk DATE November 26, 1979

(This space for Federal or State office use)

(OVER)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

03 1979

AL SURVEY