REPAIR WELL

PULL OR ALTER CASING

MULTIPLE COMPLETE CHANGE ZONES ABANDON* (other) (NOTE: Report results of multiple completion or zone

change on Form 9-330.)

5.5

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY


_	0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		
S	5. LEASE	, ř :-	
INTERIOR	SF 078509		
VEY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME		
		, ,	
	7 LINIT ACDEEMENT NAME		

SUNDRY NOTICES AND REPORTS ON WELLS (Do not use this form for proposals to drill or to deepen or plug back to a different reservoir, Use Form 9–331–C for such proposals.)	7. UNIT AGREEMENT NAME San Juan 32-9 Unit
reservoir. Use Form 9-331-C for such proposals.)	8. FARM OR LEASE NAME
1. cil gas	San Juan 32-9 Unit
2. NAME OF OPERATOR	32A 2 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
El Paso Natural Gas Company	10. FIELD OR WILDCAT NAME
3. ADDRESS OF OPERATOR	Blanco M.V.
P.O. Box 289, Farmington, New Mexico 87401 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 31, T-32-N, R-9-W
below.) AT SURFACE: 790'N, 800'W AT TOP PROD. INTERVAL: AT TOTAL DEPTH:	12. COUNTY OR PARISH 13. STATE New Mexico
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,	14. API NO.
REPORT, OR OTHER DATA	15. ELEVATIONS (SHOW DF, KDB, AND WD) 6629 GL
REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF: * TEST WATER SHUT-OFF FRACTURE TREAT SHOOT OF ACIDIZE	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5-25-79: TD 3913'. Ran 100 jts. 7", 20#, K-55 intermediate casing, 3901' set at 3913'. Cemented w/442 cu. ft. cement. WOC 12 hours; held 1200#/30 minutes. Top of cement at 1800'.

5-28-79: TD 6238'. Ran 78 jts. 4 1/2", 10.5#, KS casing liner, 2585' set 3653-6238'. Float collar set at 6221'. Cemented w/449 cu. ft. cement. WOC 18 hours

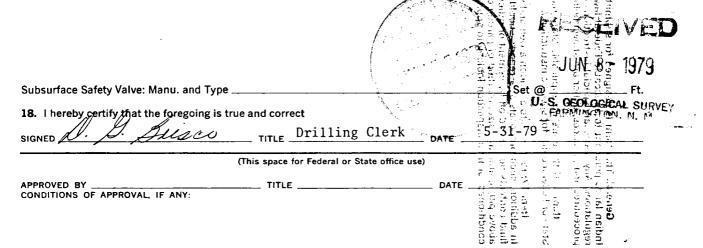

*See Instructions on Reverse Side



	`.