

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐
2. NAME OF OPERATOR
SOLAR PETROLEUM, INC.
3. ADDRESS OF OPERATOR 80202
One Denver Pl., #1300, 999 18th St., Denver, CO
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1230' FSL, 2425' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) SPUD & CASING RECORD ☒

SUBSEQUENT REPORT OF:

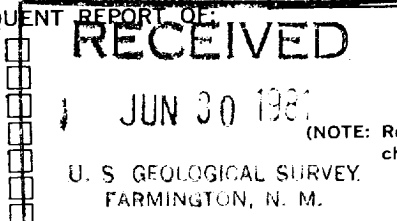

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

DATE SPURRED: 12-8-80
DATE TD REACHED: 12-13-80
DATE COMPLETED: 3-20-81
TD: 1,270'
PBTD: 1,231'
DIRECTIONAL SURVEY MADE: 1 1/4° @ 1,270'

SET 8-5/8" csg w/ 100 sx Class 'B' Neat, 1/4#/sx flake, 3% CaCl₂ (12-1" hole) @ 90' w/ 4 bbls to sfc.

SET 4-1/2" csg w/ 300 sx 50-50 POZ, 2% gel, 10% salt (6-3/4" hole) @ 1265.74' w/ 15 bbls to sfc.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Quen L. Stone TITLE Sr. Pet. Engineer DATE June 26, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

*See Instructions on Reverse Side