SUBMIT IN T ICATE*

Form approved. Budget Bureau No. 42-R1425.

(Other instructions on reverse side) 30-045-3456

UNITED STATES DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

	0 7	<u> </u>	_	(00	
5.	LEASE DESI	GNATION	AND	SERIAL NO.	
	NM	0211	.25		

APPLICATION	I FOR PERMIT	TO DRILL, DI	EEPEN,	OR I	PLUG B.	<u>ACK</u>	o. IF INDIAN, ALLOTTE	E OR TRIBE NAME	
1a. TYPE OF WORK DRI	LL X	DEEPEN []	PL	.UG BAC	ж 🗆 🛚	7. UNIT AGREEMENT	NAMB	
b. TYPE OF WELL			SINGLE	X	MULTIPL		8. FARM OR LEASE NA	.MO0	
WELL WI	S COTHER		ZONE	[4 <u>7</u>]	ZONE		Taalaaa		
	d Oil & Gas,	Inc.					9. WELL NO.		
2. ADDRESS OF OPERATOR		21.0					9. WELL NO. 2-E		
	n Street, De						10. FIELD AND POOL,	OR WILDCAT	
4. LOCATION OF WELL (Re	•		any State	requirem	ents.*)		Basin D	akota	
815'	FSL & 1550'	FEL					11. SEC., T., R., M., OR AND SURVEY OR A	BLK. REA	
At proposed prod. zone	Same						Sec. 18, T3	lN, Rl2W	
14. DISTANCE IN MILES A							12. COUNTY OR PARISE	1	
	es SE of LaP					15	San Juan	New Mexico	
15. DISTANCE FROM PROPU LOCATION TO NEAREST PROPERTY OR LEASE L		815'	16. No. OF		N LEASE		F ACRES ASSIGNED	220	
(Also to nearest drig	. unit line, if any)		. ر 19. PROPOSE	20		20 2001	<u>E</u> 320		
 DISTANCE FROM PROPE TO NEAREST WELL, DE OR APPLIED FOR, ON THI 	HLLING. COMPLETED,	2800'		75'	•	20. RUTAI	Rotary		
21. ELEVATIONS (Show whe						<u> </u>	22. APPROX. DATE W	ORK WILL START*	
		GL 5890'					May 31, 1		
23.	1	PROPOSED CASING	AND CEN	MENTIN	G PROGRA	м			
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOO)T	SETTING DEPTH			QUANTITY OF CEMENT		
12-1/4"	8-5/8"	24.0		25		20	200 sx.		
7-7/8''	5-1/2"	15.5		707	5 '				
cement 2. WOC 12 3. Install 4. Drill 7 and rad 5. Run and 6. Selecti	BOPs. Pres -7/8" hole to ioactive log set 5-1/2" vely perforated by regulate PROPOSED PROGRAM: If irill or deepen directions	sure test to ± 7075' s. casing with te and sti	casing with the stage mulate with stage mulate with the stage mulate with the stage of the stage	g and fres	d prev h water ollars kota f	entor: r gel and ormat:	s to 1000 ps mud. Run of cement.	sig. electric	
SIGNED	un Ja	· ·	Sr. P	rodu	ction	Engin	May May	6, 1980	
(This space for Feder	al or state office use)				· · · · · · · · · · · · · · · · · · ·	A	HPROVED		
PERMIT NO.			APPR	OVAL DAT	re	AE)	
	- · · · · · ·					_	dia risono		
APPROVED BYCONDITIONS OF APPROV	AT IF ANY	TITL	E			u	mu F		
	3nd	NMOC	C			7. Di :	TAMES F. SLAS TO CT ZUSCHRUMP	**************************************	

1 11. 600 2 1 11 11 Revised 10-1-78 ENERGY AR MITIERALS GEPARTMENT SANTA FE, NEW MIXICO 875 All distances must be from the outer houndaries of the Section Well 110. Sperator CONSOLIDATED OIL & GAS, INC. JACKSON 2-E Jan Letter Lection Township Harrie County 18 31 NORTH 12 WEST SAN JUAN ketual f'astage Loration of hells SOUTH feet from the fret from the EAST Jound Level Clev. l'inducing l'ormation Dedicated Acreoger Dakota @asin Dakota 5890 320 1. Outline the acrenge dedicated to the subject well by colored pencil or hachare marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes," type of consolidation _ Yes □ No If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Division. CERTIFICATION I hereby certify that the Information comtained herein Is true and complete to the best of my knowledge and belief. Merle J. Savage Position IJackson. 2-18 Sr. Production Engineer Consolidated Oil & Gas, Inc. 1980 है plat was platted from field Maring the raising of God that the same Date Surveyed 2-E February 29, 1980 Hegisteret Protessional Engine Leese Crittleate No.

1000

1100

100

1463

DEVELOPMENT PLAN FOR SURFACE USE

JACKSON No. 2-E

Consolidated Oil & Gas, Inc. - Operator

NM 021125

SW SE Sec. 18, T31N, R12W San Juan County, New Mexico

1. Existing Roads

See enclosed topographic map (Attachment "A") which shows existing improved and unimproved roads.

2. Planned Access Roads

See enclosed topographic map (Attachment "A"). Access is existing. No new access planned.

Location of Existing Wells

See enclosed lease map (Attachment "B").

4. Location of Existing and/or Proposed Facilities

See enclosed lease map (Attachment "B") showing location of wells and facilities operated by Consolidated Oil & Gas, Inc. If production is encountered, the tank battery and other required producing equipment will be located per attached completion plat (Attachment "C").

5. Location and Type of Water Supply

Water for drilling will be trucked approximately fifteen miles from an irrigation canal in Aztec, New Mexico or purchased locally and transported via irrigation pipe if water is available.

6. Source of Construction Materials

No additional construction material will be required.

7. Methods of Handling Waste Disposal

All waste material will be contained by earthen and steel pits. Earthen pits will be subsequently backfilled and buried. A portable chemical toilet will be furnished for drilling personnel.

8. Ancillary Facilities

No separate drill campsites are proposed.

9. Wellsite Layout

The drilling site location will be graded and will approximate $200' \times 250'$ with natural drainage to the northwest. Care will be taken while grading to control erosion.

10. Plans for Restoration of Surface

- A. Following drilling and completion operations, all equipment and material not needed for operations will be removed. Pits containing fluid will be fenced until filled with any additional pits filled and the location cleaned of all trash and junk.
- B. After abandonment, any special rehabilitation and/or revegetation requirements (reseed with seed mixture No. 2) will be complied with and accomplished as expeditiously as possible. All pits should be filled and leveled within 90 days after abandonment.

11. Other Information

The location is on the side of a slope in a rolling hills area, with sandy clay topsoil and vegetation consisting of scattered scrub cedar and pine as well as rabbit brush and native grasses. No residences or structures are nearby. The surface rights are leased by F. F. Montoya, La Plata, New Mexico. If, during operations, any historic or prehistoric ruin, monument or site, or any object of antiquity is discovered, work will be suspended and the discovery will be reported to the appropriate regulatory agency.

12. Operator's Representative

Consolidated Oil & Gas, Inc.
Merle J. Savage, Senior Production Engineer
1860 Lincoln Street, Suite 1300
Denver, Colorado 80295
Phone (303) 861-5252

13. Certification


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Consolidated Oil & Gas, Inc. and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.


May 6, 1980

Date

Merle J. Savage

Senior Production Engineer

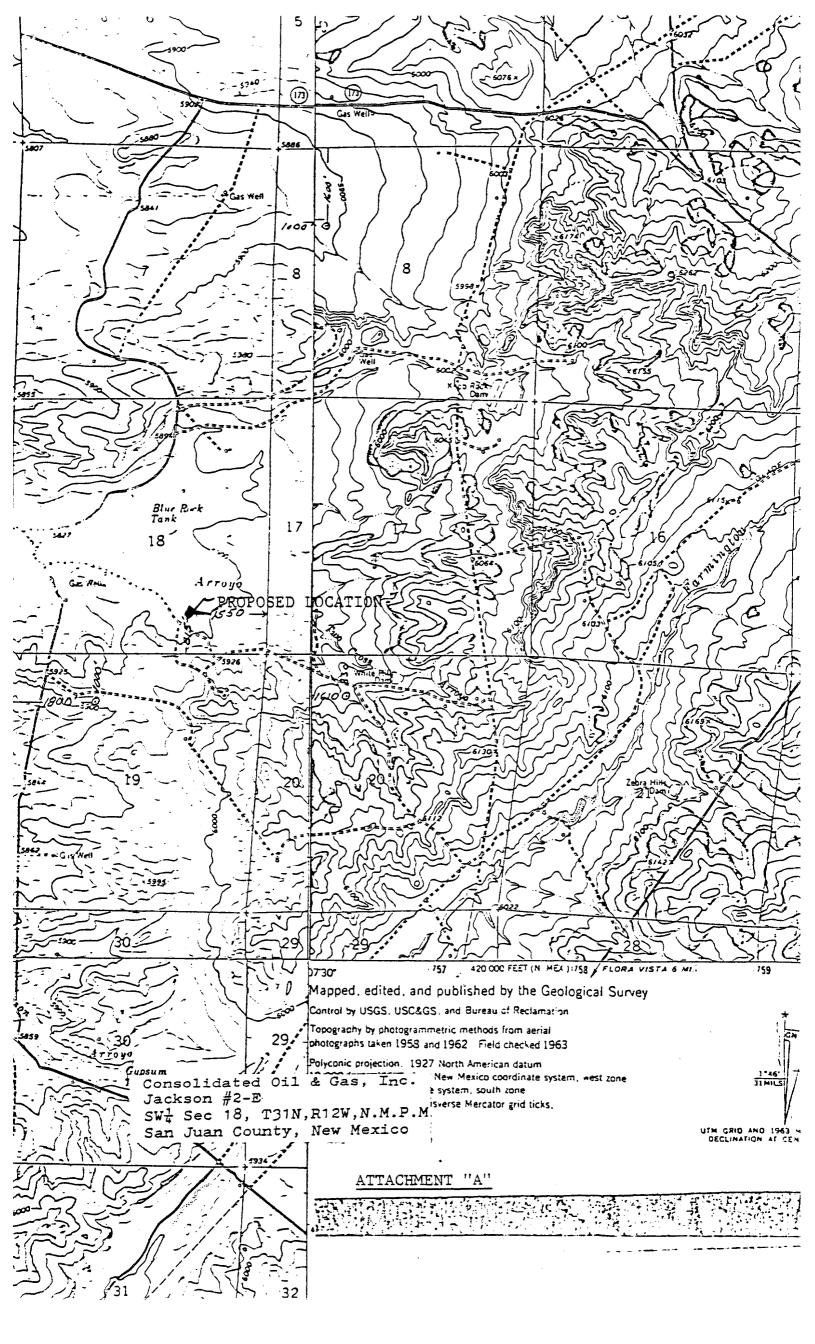

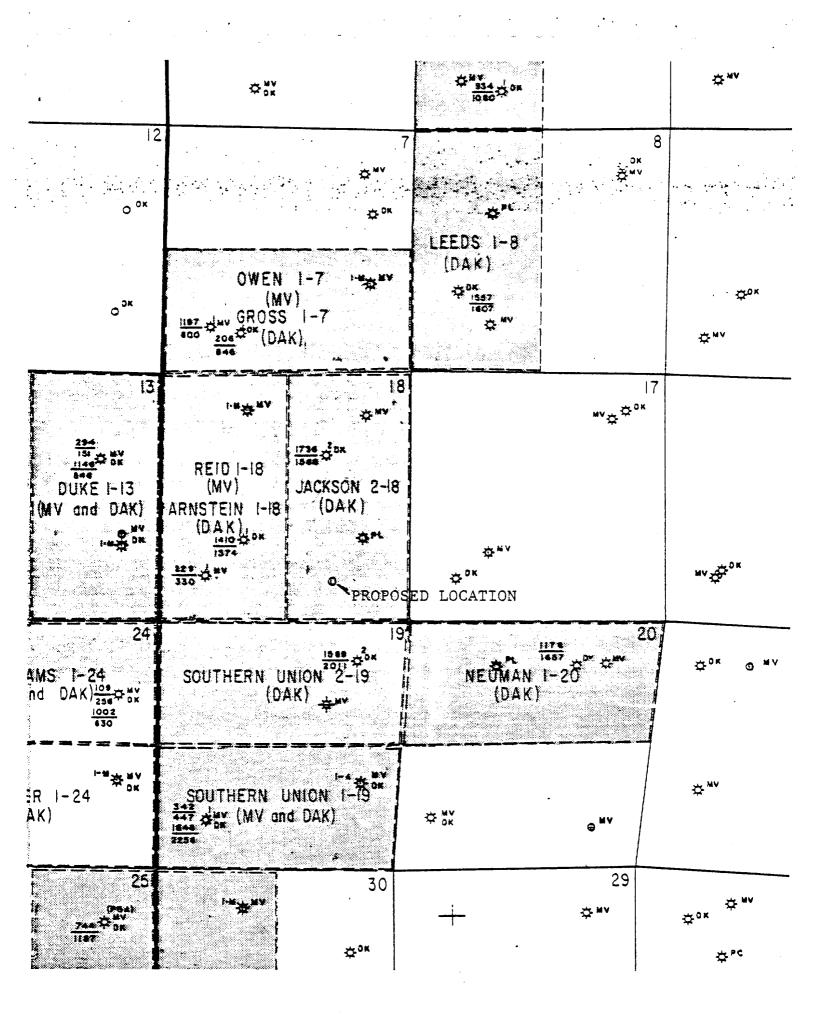

ATTACHMENT "B"

Development Plan for Surface Use Consolidated Oil & Gas, Inc.

JACKSON No. 2-E NM 021125

SW SE Sec. 18, T31N, R12W San Juan County. New Mexico

ATTACHMENT "C"


DEVELOPMENT PLAN FOR SURFACE USE

CONSOLIDATED OIL & GAS, INC. - OPERATOR

JACKSON No. 2-E


NM 021125 SW SE Sec. 18, T31N, R12W San Juan County, New Mexico

- 1. Well
- 2. Dead Men
 - 3. Prod. Unit
 - 4. Water Pit
 - 5. 300 bbl. 0il Tank
 - 6. Water Pit
 - 7. 2" Buried flow line
 - 8. 1½" Oil Line
- 9. 1½" Water Line

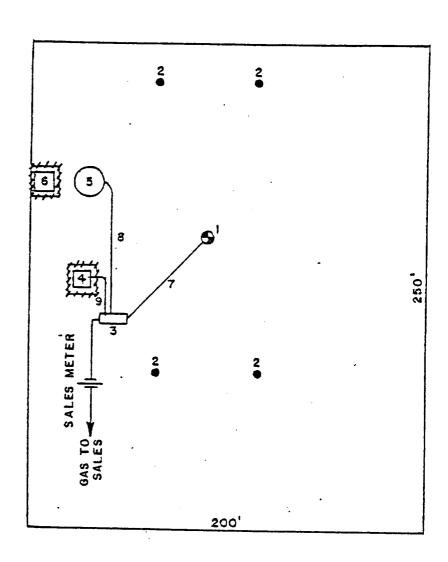

1" equals 50'

Fence -////

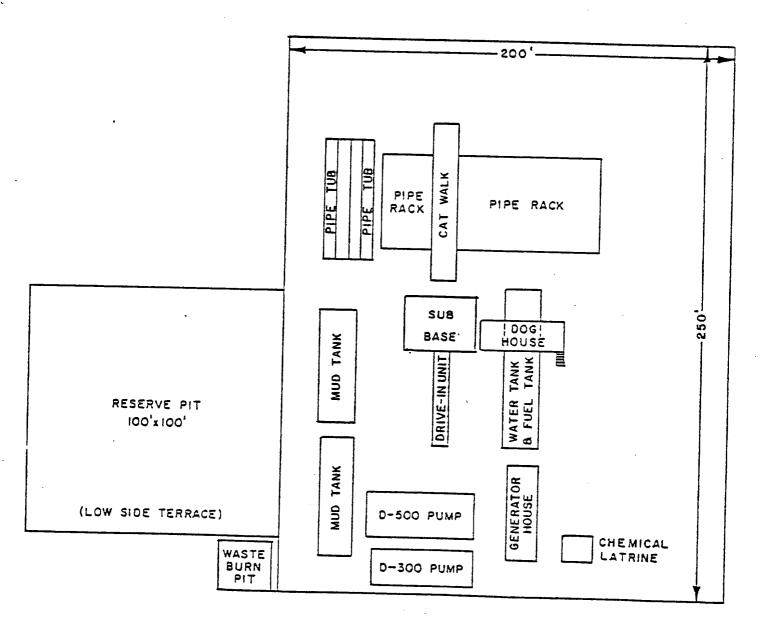

ATTACHMENT "D"

DEVELOPMENT PLAN FOR SURFACE USE

CONSOLIDATED OIL & GAS, INC. - OPERATOR

JACKSON No. 2-E

NM 021125 SW SE Sec. 18, T31N, R12W San Juan County, New Mexico



Consolidated Oil & Gas, Inc.

LINCOLN TOWER SUILDING 1860 LINCOLN STREET DENVER, COLORADO 80295 (303) 861-5252

May 6, 1980

U. S. Geological Survey P. O. Box 959 Farmington, New Mexico 87401

Re: Application for Permit to Drill Jackson No. 2-E

San Juan County, New Mexico

Gentlemen:

Following is the information requested in NTL-6 to accompany the permit to drill:

- 1. Location: 815' FSL & 1550' FEL, "N", Sec. 18, T31N, R12W San Juan County, New Mexico
- 2. Elevation of Unprepared Ground: 5890'
- 3. Geologic Name of Surface Formation: Nacimiento
- 4. Type of Drilling Tools: Rotary
- 5. Proposed Drilling Depth: 7075'

6.	Estimated Geologic Mar	7. <u>A</u>	Anticipated Gas & Oil		
	Ojo Alamo Pictured Cliffs Cliff House Pt. Lookout Greenhorn Dakota	375' 2250' 3330' 4590' 6640' 6765'		X X X	

8. Casing Program and Setting Depth:

	Size	Weight	Grade	Condition	Depth Depth
Surface	8-5/8"	24.0#	K-55	New	250'
Production	5-1/2"	15.5#	K-55	New	7075'

9. Casing Setting Depth and Cementing:

Surface casing will be set at 250'. Cement will be circulated to surface with approximately 200 sx. Class "B" neat cement containing 2% CaCl $_2$.

Cementing Prognosis:

Production casing will be run to total depth. Two stage collars will be run in the casing string at approximately 1350' and 4900'. The casing will be cemented in three stages as follows:

1st Stage: 60 sx. 65/35 Pozmix with 12% gel, tailed in with 160 sx. 50/50 Pozmix with 4% gel and 0.5% FLA.

2nd Stage: 120 sx. 65/35 Pozmix with 6% gel, tailed in with 160 sx. 50/50 Pozmix with 4% gel and 0.4% FLA.

3rd Stage: 240 sx. 65/35 Pozmix with 12% gel, tailed in with 50 sx. 50/50 Pozmix with 2% gel and 0.4% FLA.

Note: Exact volume of cement to be determined after running Caliper log.

- 10. Pressure Control Equipment: See attached diagram "A".
- 11. <u>Circulating Media</u>: 0-250' fresh water spud mud; 250'-TD fresh water, low solid mud with following properties:

Viscosity 32-28 sec., water loss 20-6 cc, weight 8.5-9.0 ppg with heavier weights if required by well conditions.

- 12. Testing, Logging and Coring Programs:
 - a. Open hole logs will be run prior to running production casing.
 - b. Coring is not planned.
- 13. Abnormal Pressure or Temperature and Hydrogen Sulfide Gas:

We do not anticipate abnormal pressure, temperature or hydrogen sulfide gas; however, a remote control blowout preventer as shown on attached diagram "A" will be installed.

- 14. Anticipated Starting Date: Drilling operations should start shortly after May 31, 1980.
- 15. Other Facets of the Proposed Operations: None

Yours very truly,

CONSOLIDATED OIL & GAS, INC.

Merle J. Savage

Senior Production Engineer

MJS:lt Attach.

D1 JRAM "A"
U.S.G.S. APPLICATION FOR PERMIT
TO DRILL

CONSOLIDATED OIL & GAS, INC - OPERAT

JACKSON No. 2-E NM 021125 SW SE Sec. 18, T31N, R12W San JuanCounty, New Mexico

