

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other

2. NAME OF OPERATOR
Southland Royalty Company

3. ADDRESS OF OPERATOR
P.O. Drawer 570, Farmington, NM 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1520' FSL & 1560' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Casing Report

SUBSEQUENT REPORT OF:

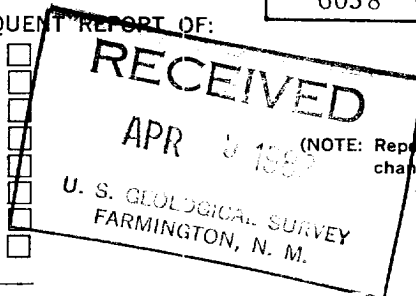

5. LEASE

SF - 078115

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Grenier

9. WELL NO.
#15E

10. FIELD OR WILDCAT NAME
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Section 18, T31N, R11W

12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6058' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

3-29-82 Ran 120 jts (4784') of 7", 23#, K-55, casing set at 4798'. Cemented first stage with 60 sacks of Class "B" 50/50 poz, 6% gel, 1/4# gel flake. Tail in with 50 sacks of Class "B" cement with 2% CaCL2. Plug down at 9:00 p.m., 3-29-82. Cemented second stage w/510 sacks 50/50 poz, 6% gel, 1/4# gel flake/sack. Tail in with 70 sacks Class "B" neat with 2% CaCL2. Plug down at 11:15 a.m., 3-30-82. Top of Cement at 800'.

4-3-82 Drilled 6-1/4" hole to a total depth 7244'. Ran 83 jts (2657') of 4-1/2", 11.6#, & 10.5#, K-55 casing set from 4592' to 7244'. Cemented with 315 sacks Class "B" 50/50 poz, 6% gel, 1/4# Flocele. Plugdown at 7:00 p.m., 4-3-82.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Ethel Greger TITLE Secretary DATE April 7, 1982

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____ DATE _____

NMOCO

APR 09 1982

FARMINGTON DISTRICT

BY SM