

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-23169
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. LO-1080-0006
7. Lease Name or Unit Agreement Name State "4"
8. Well Number 1
9. OGRID Number 288173
10. Pool name or Wildcat Sawyer San Andres West
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3967' GR

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
Stanolind Operating DBA Stanolind NM LLC

3. Address of Operator
310 W. Wall, Suite 1000, Midland, Texas 79701

4. Well Location
 Unit Letter B : 660 feet from the North line and 1980 feet from the West line
 Section 4 Township 10S Range 37E NMPM Lea County

5. Date: **MAY 09 2014**

6. Status: **RECEIVED**

7. **HOBBS OCD**

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL. <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

8 5/8" 24# casing set @ 410', cemented w/ 250 sx Class "H", circulated to surface
 4 1/2" 9.5 # casing set @ 5057', cemented w/ 250 sx Class "C" plus 27 sacks latex cement, cement top 3030' (calc)
 San Andres perforations 4958-5008'.

Stanolind proposes to plug and abandon as follows:

- Set CIBP @ 4900, dump 2 sx Class "C" cement on plug **35' by W.L. OR 25 SXS BY TBG**
- TIH and displace with mud laden fluid.
- Spot 35 sx Class "C" cement from 2945' to 2845'. ~~If hole is not standing full~~, WOC and tag.
- Spot 35 sx Class "C" cement from 2235' to 2135'. ~~If hole is not standing full~~, WOC and tag.
- Perforate the 4 1/2" casing @ 460', circulate cement to surface, leaving the hole full of cement. Estimated volume is 135 sx.
- Cut off wellhead and install P&A marker plate (location within LPC area).
- Clean and level location.

A closed-loop system will be used. Notice will be given 24 hours before setting all plugs.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ally M. Pe TITLE Ex. VP- OPERATIONS DATE 5/7/14

Type or print name _____ E-mail address: _____ PHONE: _____

For State Use Only

APPROVED BY: Maley Brown TITLE Dist Supervisor DATE 5/13/2014
 Conditions of Approval (if any):

MAY 13 2014

PRIOR TO P&A


Stanolind Operating LLC DBA Stanolind Operating NM LLC

WELL NAME:	State "4" #1	FIELD:	Sawyer				
LOCATION:	S4 T10S R37E	API #:	30-025-23169				
COUNTY:	Lea	ST:	NM	SPUD DATE:	06/02/69		
KB:	3976'	GL:	3967'	TD:	5057'	PBTD:	

8 5/8" @ 410' cmt'd w/ 250 sx (circ)

Formation Tops:

Top anhydrite 2235'
Base of salt 2945'
San Andres 4206'

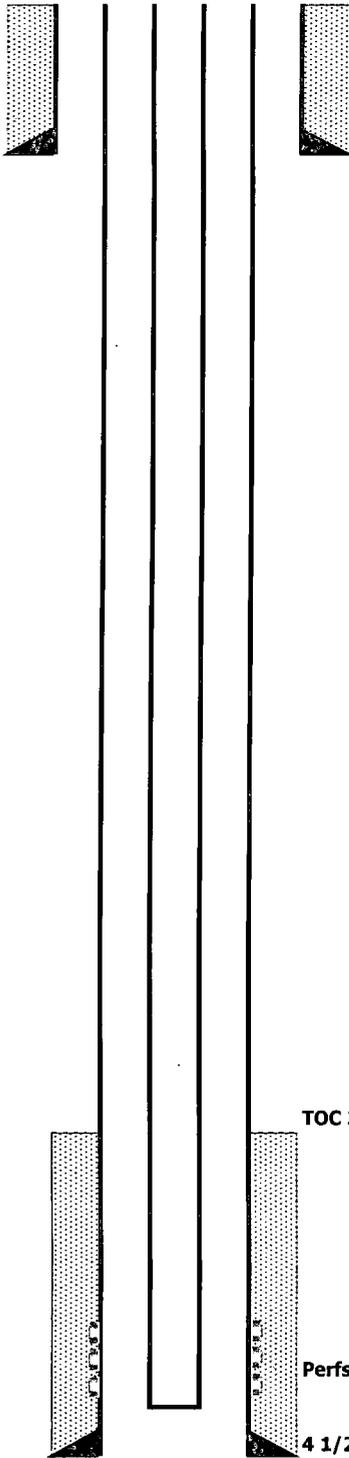

TOC 3030' (calc)

Perfs 4958-5008"


4 1/2" @ 5057' Cmt'd w/ 250 sx "C" plus 27 sx latex cement

TD 5057'

AFTER P&A

Stanolind Operating LLC DBA Stanolind NM LLC

WELL NAME:	State "4" #1	FIELD:	Sawyer				
LOCATION:	S4 T10S R37E	API #:	30-025-23169				
COUNTY:	Lea	ST:	NM	SPUD DATE:	06/02/69		
KB:	3976'	GL:	3967'	TD:	5057'	PBTD:	



8 5/8" @ 410' cmt'd w/ 250 sx (circ)


Perf @ 460' and circulate cement to surface, estimated volume 135 sx

Formation Tops:

Top anhydrite 2235'
Base of salt 2945'
San Andres 4206'




35 sack cement plug @ 2235'



35 sack cement plug @ 2945'

TOC 3030' (calc)



CIBP @ 4900' plus 20' of cement

Perfs 4958-5008"

4 1/2" @ 5057' Cmt'd w/ 250 sx "C" plus 27 sx latex cement

TD 5057'