

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NMOCD
Hobbs

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other	8. Well Name and No. ANTIETAM 9 FED COM 706H
2. Name of Operator EOG RESOURCES, INC. /	9. API Well No. 30-025-44348
3a. Address ATTN: STAN WAGNER P.O. BOX 2267 MIDLAND, TX 79702	10. Field and Pool or Exploratory Area WC-025 S253509D UPPR WC
3b. Phone No. (include area code) Ph: 432-686-3689	11. County or Parish, State LEA COUNTY, NM
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 9 T25S R33E Mer NMP NENW 41FNL 1587FWL /	

HOBBS OGD
MAY 08 2018

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Hydraulic Fracturing
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Alter Casing
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other Change to Original APD

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

EOG Resources requests an amendment to our approved APD for this well to reflect a change in casing design as attached.

Change to a 4-string casing design.

well already drilled

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #401270 verified by the BLM Well Information System For EOG RESOURCES, INC., sent to the Hobbs Committed to AFMSS for processing by PRISCILLA PEREZ on 01/25/2018 ()

Name (Printed/Typed) STAN WAGNER	Title REGULATORY ANALYST
Signature (Electronic Submission)	Date 01/17/2018

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Office _____		

ACCEPTED FOR RECORD

BUREAU OF LAND MANAGEMENT

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

Revised Permit Information 1/17/18:

Well Name: Antietam 9 Fed Com No. 706H

Location:

SL: 41' FNL & 1587' FWL, Section 9, T-25-S, R-33-E, Lea Co., N.M.

BHL: 2410' FNL & 1970' FWL, Section 16, T-25-S, R-33-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 - 1,100'	13.375"	54.5#	J55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J55	LTC	1.125	1.25	1.60
12.25"	4,000' - 4,900'	9.625"	40#	HCK55	LTC	1.125	1.25	1.60
8.75"	0 - 11,400'	7.625"	29.7#	HCP110	FXL	1.125	1.25	1.60
6.75"	0 - 10,900'	5.5"	20#	P110EC	DWC CIS MS	1.125	1.25	1.60
6.75"	0'-19,814'	5.5"	20#	P110EC	VAM SFC	1.125	1.25	1.60

Variance is requested for annular clearance of the 5-1/2" x 7-5/8" to the top of cement.

Cement Program:

Depth	No. Sacks	Wt. lb/gal	Yld Ft ³ /ft	Slurry Description
1,100'	697	13.5	1.74	Lead: Class 'C' + 4.00% Bentonite + 2.00% CaCl ₂ (TOC @ Surface)
	333	14.8	1.35	Tail: Class 'C' + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
4,900'	692	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	303	14.8	1.32	Tail: Class C + 0.13% C-20
11,400'	375	10.8	3.67	Lead: Class C + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 4,400')
	400	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800
19,814'	950	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,900')

Mud Program:


Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,100'	Fresh - Gel	8.6-8.8	28-34	N/c
1,100' - 4,900'	Brine	10.0-10.2	28-34	N/c
4,900' - 11,400'	Oil Base	8.7-9.4	58-68	N/c - 6
11,400' - 19,814' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

Antietam 9 Fed Com #706H
Lea County, New Mexico

41' FNL
1587' FWL
Section 9
T-25-S, R-33-E

Proposed Wellbore
Revised 1/17/18
API: 30-025-*****

KB: 3,465'
GL: 3,440'

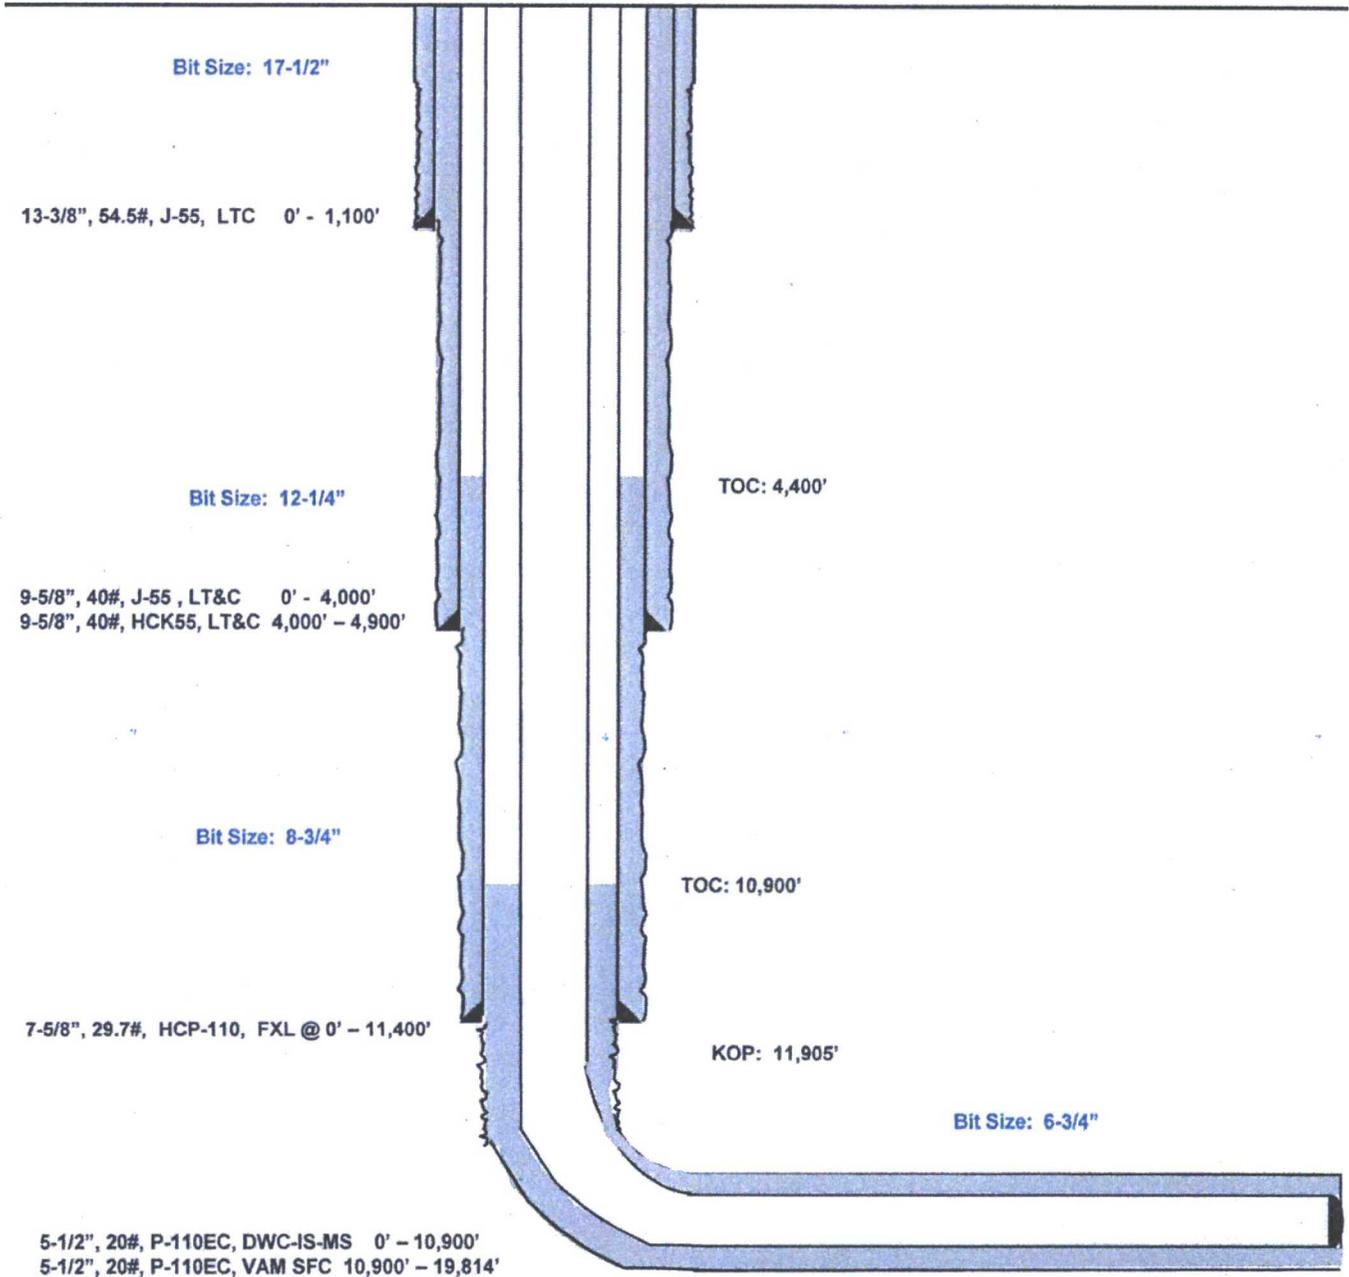

Lateral: 19,814' MD, 12,373' TVD
Upper Most Perf:
330' FNL & 1973' FWL Sec. 9
Lower Most Perf:
2310' FNL & 1970' FWL Sec. 16
BH Location: 2410' FNL & 1970' FWL
Section 16
T-25-S, R-33-E