

Submit 3 Copies To Appropriate District Office
 District I
 1625 N. French Dr., Hobbs, NM 88240
 District II
 1301 W. Grand Ave., Artesia, NM 88210
 District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised May 08, 2003

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-23388
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. K-1860
7. Lease Name or Unit Agreement Name Atlantic 32 State
8. Well Number #1
9. OGRID Number 10179
10. Pool name or Wildcat Buffalo Queen
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3754' GL

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
 Oil Well Gas Well Other

2. Name of Operator
 Harvey E. Yates Company

3. Address of Operator
 PO Box 1933, Roswell NM 88202-1933

4. Well Location
 Unit Letter C : 660 feet from the North line and 1980' feet from the West line
 Section 32 Township 18 S Range 33 E NMPM Eddy County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK PLUG AND ABANDON

TEMPORARILY ABANDON CHANGE PLANS

PULL OR ALTER CASING MULTIPLE COMPLETION

OTHER:


SUBSEQUENT REPORT OF:

REMEDIAL WORK ALTERING CASING

COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT

CASING TEST AND CEMENT JOB

OTHER:

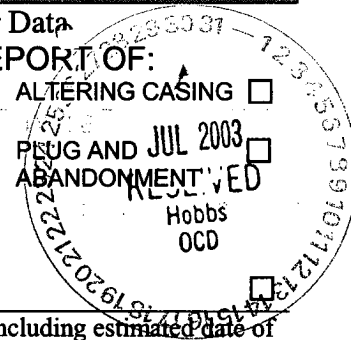

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Previously found a hole in the 8 5/8" casing @ 601'. Pumped 250 sx class "C" cement to plug hole in casing. Drilled and cleaned fill out of csg to RBP @ 2,023' & pulled RBP to 663'. We ran a camera down the 8 5/8" casing and found it parted at appx 599' with separation of 4' down to top of stub @ 603'. Pull RBP out of hole.

Harvey E. Yates Company next proposes to run 3000' of 5 1/2" casing and circulate cement to the surface.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Jen Atkinson TITLE Prod Analyst DATE 7/28/03
 Type or print name Telephone No. (505)623-6601

(This space for State use)
 APPROVED BY Hay W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE JUL 31 2003
 Conditions of approval, if any: