

New Mexico Oil Conservation Division, District I  
1625 N. French Drive  
Hobbs, NM 88240

RECEIVED

Form 3160-3  
(April 2004)

JAN 11 2010

HOBBSOCO

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0137  
Expires March 31, 2007

5 Lease Serial No  
NMNM-119274

6 If Indian, Allottee or Tribe Name

1a Type of work- ☒ DRILL ☐ REENTER

7 If Unit or CA Agreement Name and No

1b Type of Well ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone

8, Lease Name and Well No.

Peery Federal #9 H

2 Name of Operator

Mack Energy Corporation

9 API Well No

30-005-29117

3a Address

P.O. Box 960 Artesia, NM 88211-0960

3b Phone No (include area code)

(575)748-1288

10 Field and Pool, or Exploratory

Little Lucky Lake; Wolfcamp

4 Location of Well (Report location clearly and in accordance with any State requirements\*)

At surface 1225 FSL & 330 FEL

At proposed prod zone 965 FSL & 330 FWL

11 Sec, T R M or Blk and Survey or Area

Sec. 29 T15S R30E

14 Distance in miles and direction from nearest town or post office\*

15 miles north of Loco Hills, NM

12 County or Parish

Chaves

13 State

NM

15 Distance from proposed\* location to nearest property or lease line, ft (Also to nearest drilg unit line, if any) 330

16 No. of acres in lease

640

17 Spacing Unit dedicated to this well

160

18 Distance from proposed location\* to nearest well, drilling, completed, applied for, on this lease, ft 300'

19 Proposed Depth  
MD 13,030'  
TVD 8,673'

20 BLM/BIA Bond No on file

NMB000286

21 Elevations (Show whether DF, KDB, RT, GL, etc )  
3970' GR

22 Approximate date work will start\*  
12/1/2009

23 Estimated duration  
35 days

24. Attachments

ROSWELL CONTROLLED WATER BASIN

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form

1 Well plat certified by a registered surveyor

2 A Drilling Plan

3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office)

4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above),

5 Operator certification

6 Such other site specific information and/or plans as may be required by the authorized officer

25 Signature

Jerry W. Sherrell

Name (Printed/Typed)

Jerry W. Sherrell

Date

11/10/09

Title

Production Clerk

Approved by (Signature)

Angel Mayes

Name (Printed/Typed)

Angel Mayes

Date

JAN 06 2010

Title

Assistant Field Manager,  
Lands And Minerals

Office

ROSWELL FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

Conditions of approval, if any, are attached

APPROVED FOR 2 YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

\*(Instructions on page 2)

DECLARED WATER BASIN

CEMENT BEHIND THE

CASING MUST BE

95"  
CIRCULATED

WITNESS

APPROVAL SUBJECT TO  
GENERAL REQUIREMENTS AND  
SPECIAL STIPULATIONS ATTACHED

**RECEIVED**

State of New Mexico

DISTRICT I

1625 N. FRENCH DR., HOBBS, NM 88240

JAN 11 2010

Energy, Minerals and Natural Resources Department

DISTRICT II

1301 W. GRAND AVENUE, ARTESIA, NM 88210

HOBBSDO

OIL CONSERVATION DIVISION

1220 SOUTH ST. FRANCIS DR.

Santa Fe, New Mexico 87505

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

Form C-102

Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

DISTRICT IV

1220 S. ST. FRANCIS DR., SANTA FE, NM 87505

## WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number <b>30-005-29117</b>	Pool Code 97247	Pool Name Little Lucky Lake;Wolfcamp
Property Code 303941	Property Name <b>PEERY FEDERAL</b>	Well Number <b>9H</b>
OGRID No. 013837	Operator Name <b>MACK ENERGY CORPORATION</b>	Elevation 3970'

## Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	29	15-S	30-E		1225	SOUTH	330	EAST	CHAVES

## Bottom Hole Location If Different From Surface


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	29	15-S	30-E		965	SOUTH	330	WEST	CHAVES

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


<p>GEODETIC COORDINATES NAD 27 NME SURFACE LOCATION Y=721535.6 N X=620821.5 E</p> <p>LAT = 32 982949" N LONG = 103.939320" W</p> <p>BOTTOM HOLE LOCATION Y=721267.5 N X=616199.5 E</p>		<p>DETAIL</p>
<p>GRID. AZ. -266°40'44"</p> <p>HORZ. DIST. -4630.8'</p> <p>330' BH</p> <p>965'</p> <p>SEE DETAIL</p> <p>S.L.</p> <p>330'</p> <p>1225'</p>		<p><b>OPERATOR CERTIFICATION</b></p> <p>I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Jerry W. Sherrell</i> 11/9/09 Signature Date</p> <p>Jerry W. Sherrell Printed Name</p> <p><b>SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>OCTOBER 7 2009 Date Surveyed</p> <p><i>Ronald J. Eidson</i> Signature &amp; Seal of Professional Surveyor</p> <p>09-11-0903</p> <p>Certificate No. GARY EIDSON 12641 RONALD EIDSON 3239</p>

SECTION 29, TOWNSHIP 15 SOUTH, RANGE 30 EAST, N.M.P.M.,  
CHAVES COUNTY, NEW MEXICO

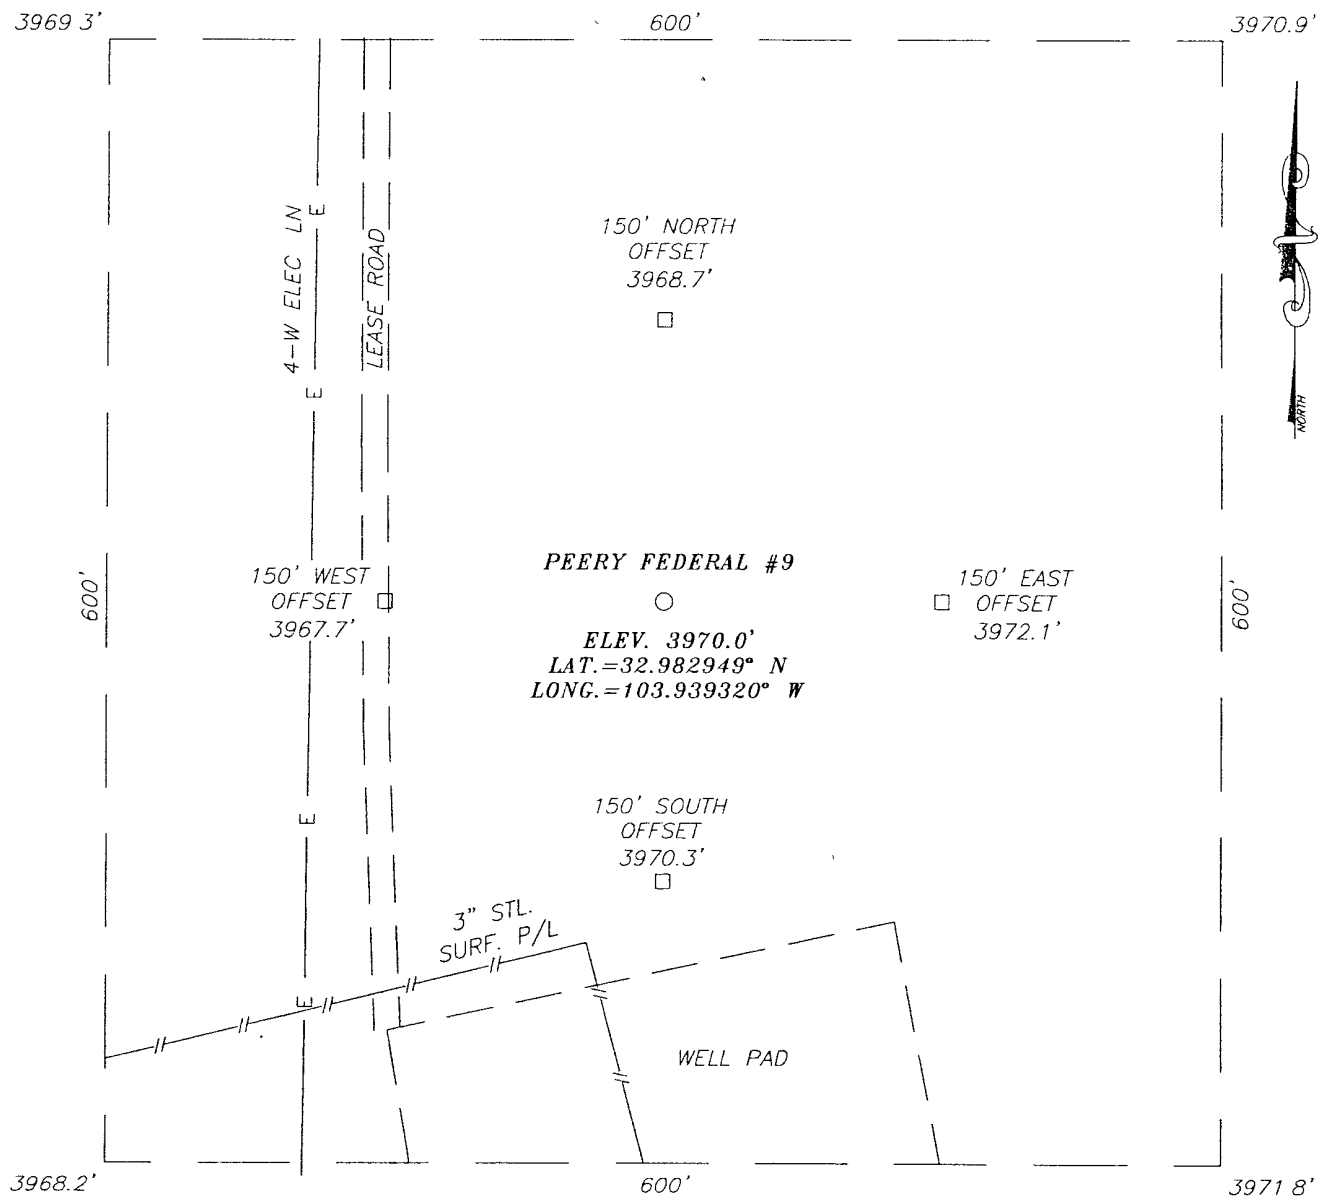

DIRECTIONS TO LOCATION


FROM THE INTERSECTION OF CO. RD. #217 (HAGERMAN CUTOFF) AND CO. RD. #256 (BOOGER LANGSTON), GO NORTH ON CO. RD. #217 APPROX. 1.8 MILES. TURN RIGHT AND GO EAST APPROX. 1.5 MILES. TURN RIGHT AND GO SOUTH APPROX. 0.2 MILES. TURN LEFT AND GO EAST APPROX. 0.6 MILES. TURN LEFT AND GO NORTH APPROX. 1.0 MILES. TURN RIGHT AND GO EAST APPROX. 0.4 MILES. TURN RIGHT AND GO SOUTH APPROX. 0.6 MILES. THIS LOCATION STAKE IS APPROX. 150 EAST.




**MACK ENERGY CORPORATION**

PEERY FEDERAL #9 WELL  
LOCATED 1225 FEET FROM THE SOUTH LINE  
AND 330 FEET FROM THE EAST LINE OF SECTION 29,  
TOWNSHIP 15 SOUTH, RANGE 30 EAST, N.M.P.M.,  
CHAVES COUNTY, NEW MEXICO.

Survey Date: 10/7/09	Sheet 1 of 1 Sheets
W.O. Number: 09.11.0903	Dr By: LA
Date: 10/13/09	09110903
	Scale: 1"=100'

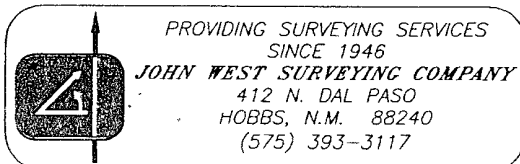


# VICINITY MAP

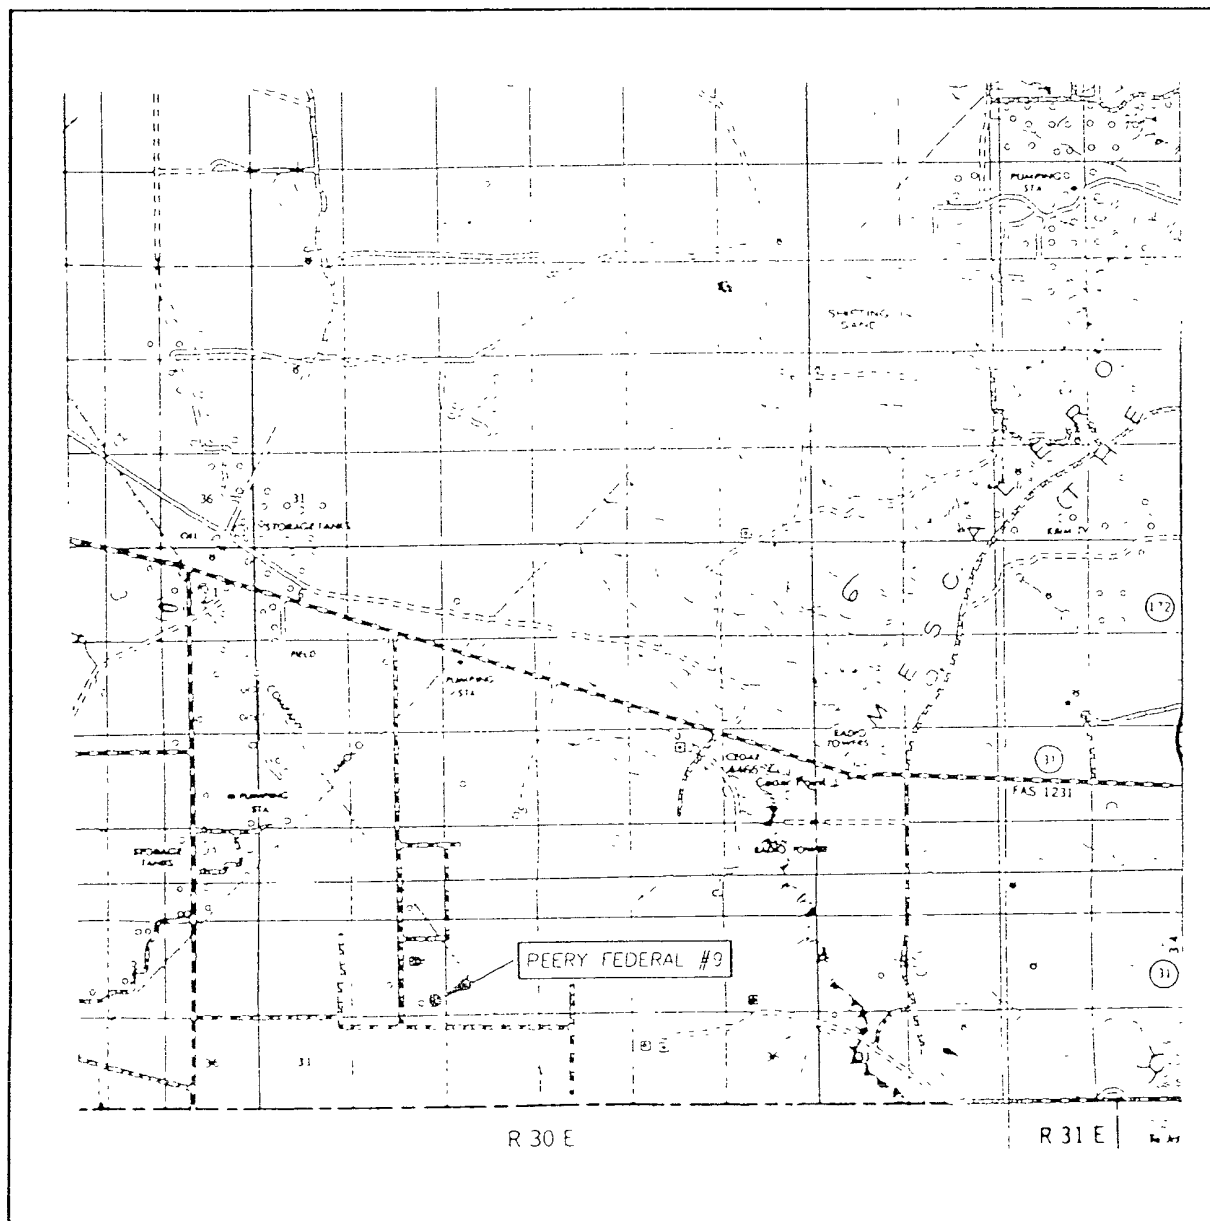


SCALE: 1" = 2 MILES

SEC 29 TWP 15-S RGE 30-E  
 SURVEY N M P M  
 COUNTY CHAVES STATE NEW MEXICO  
 DESCRIPTION 1225' FSL & 330' FEL  
 ELEVATION 3970'  
 OPERATOR MACK ENERGY CORPORATION  
 LEASE PEERY FEDERAL

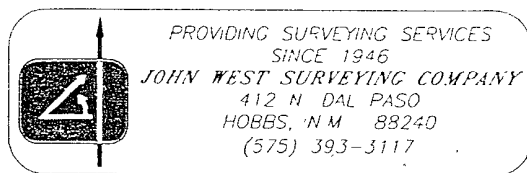

# LOCATION VERIFICATION MAP

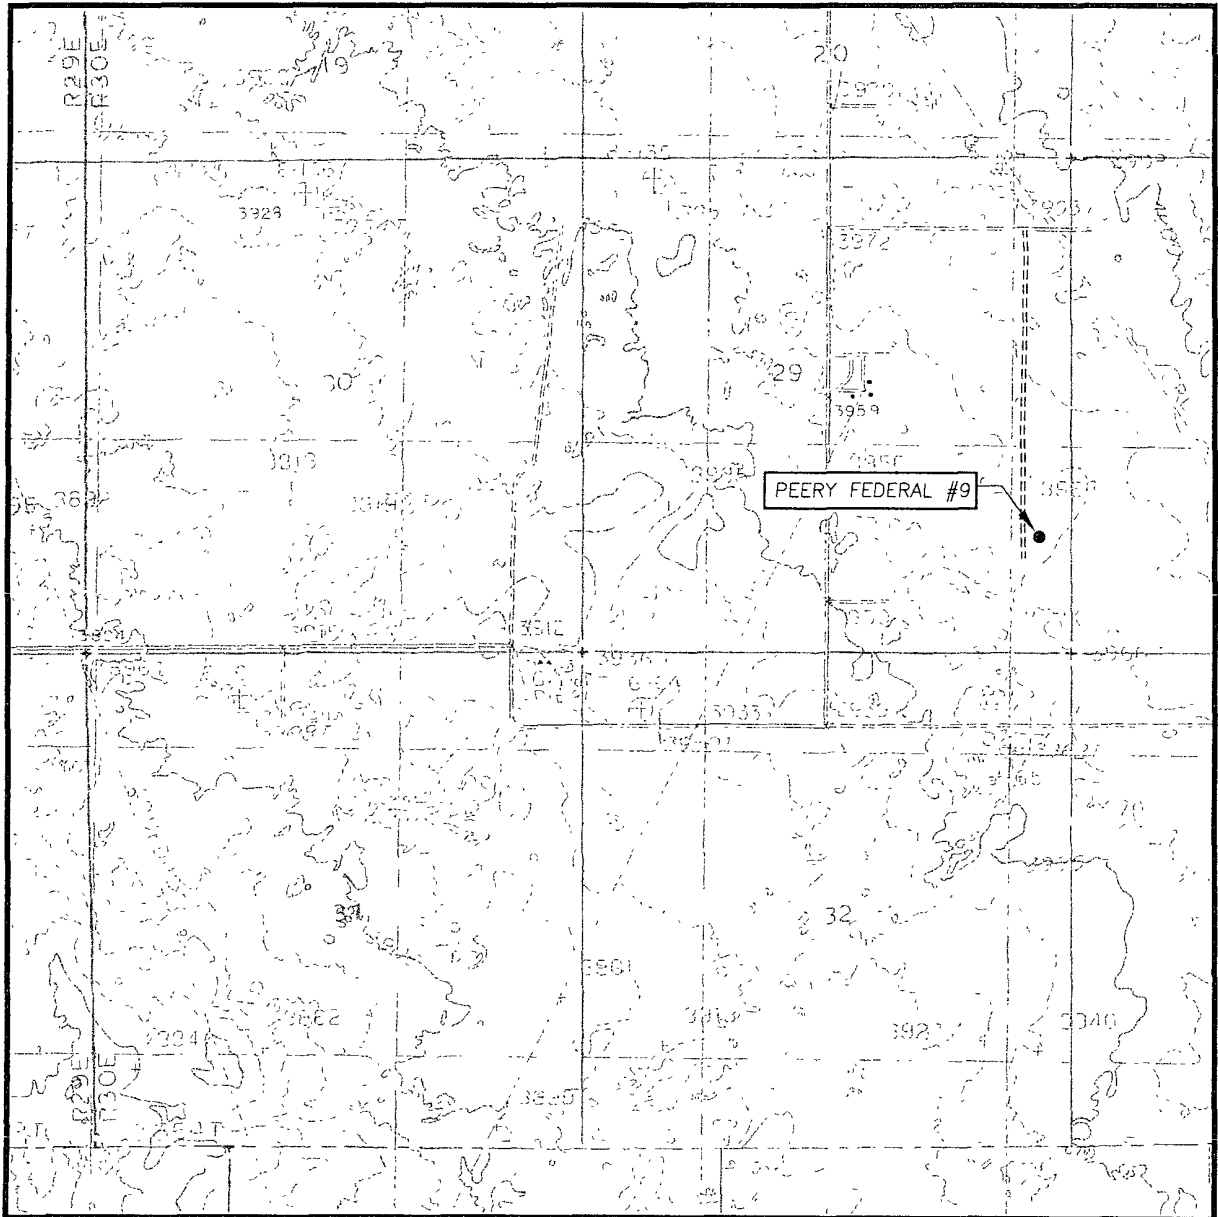

SCALE: 1" = 2000'

CONTOUR INTERVAL:  
HENSHAW TANK, N.M. - 10'

SEC. 29 TWP. 15-S RGE. 30-E

SURVEY N.M.P.M.

COUNTY CHAVES STATE NEW MEXICO


DESCRIPTION 1225' FSL & 330' FEL

ELEVATION 3970'

OPERATOR MACK ENERGY CORPORATION

LEASE PEERY FEDERAL

U.S.G.S. TOPOGRAPHIC MAP  
HENSHAW TANK, N.M.



PROVIDING SURVEYING SERVICES  
SINCE 1946  
**JOHN WEST SURVEYING COMPANY**  
412 N DAL PASO  
HOBBS, N M 88240  
(575) 393-3117

## DRILLING PROGRAM

### 1. Geologic Name of Surface Formation

Quaternary

### 2. Estimated Tops of Important Geologic Markers:

Yates	1480'	Tubb	5710'
Queen	2240'	Abo	6510'
San Andres	2920'	WC	7900'
Glorieta	4520'	Strawn	9725'

### 3. Estimated Depths of Anticipated Fresh Water, Oil and Gas:

Water Sand	150'	Fresh Water
San Andres	2920'	Oil/Gas
Abo	6510'	Oil/Gas
WC	7900'	Oil/Gas

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Setting 9 5/8" casing to 450' and circulating cement back to surface will protect the surface fresh water sand. An optional Intermediate string of 7" casing set @ 2300' should hole problems occur. Salt Section and any shallower zones above production zone, which contain commercial quantities of oil and/or gas, will have cement circulated across them by cementing a combination string of 5 1/2" and 4 1/2" production casing thru a ported collar @ 8100', sufficient cement will be pumped to circulate back to surface.

### 4. Casing Program:

Hole Size	Interval	OD Casing	Wt, Grade, Jt, cond, collapse/burst/tension
14 3/4"	0-450'	9 5/8"	36#, J-55, ST&C, New, 10.875/6.877/7.040
8 3/4"	0-2300'	7"	23#, J-55, LT&C, New, 2.707/15.137/14.533
7 7/8"	0-7850'	5 1/2"	17#, HCP-110, LT&C, New, 2.189/3.364/3.547
6 1/8"	7850-13,030	4 1/2"	11.6# HCP-110, LT&C, New, 1.422/3.286/3.56

### 5. Cement Program:

9 5/8" Surface Casing: Class C, 500sx yield 1.34  
7" Optional Intermediate Casing: Class C, 700sx, yield 1.34.  
5 1/2" Production Casing: Class C, 1000sx, yield 1.34.  
4 1/2" Production Casing: Set with isolation packers.

**6. Minimum Specifications for Pressure Control:**

The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ram-type (3000 psi WP) minimum preventer. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on bottom. The BOP will be nipped up on the 9 5/8" surface casing and tested to 2000 psi by a 3<sup>rd</sup> party and used continuously until TD is reached. All BOP's and accessory equipment will be tested to 2000 psi before drilling out of surface casing. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve and choke lines and choke manifold (Exhibit #11) with a minimum 3000 psi WP rating.

**7. Types and Characteristics of the Proposed Mud System:**

The well will be drilled to TD with a combination of brine, cut brine and polymer mud system. The applicable depths and properties of this system are as follows:

DEPTH	TYPE	WEIGHT	VISCOSITY	WATERLOSS
0-450'	Fresh Water	8.5	28	N.C.
450-3050'	Brine	10	30	N.C.
3050'-TD	Cut Brine	9.1	29	N.C.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the well site at all times.

**8. Auxiliary Well Control and Monitoring Equipment:**

- A. Kelly cock will be kept in the drill string at all times.
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

**9. Logging, Testing and Coring Program:**

- A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log from T.D. to 8 5/8 casing shoe.
- B. Drill Stem test is not anticipated.
- C. No conventional coring is anticipated.
- D. Further testing procedures will be determined at TD.

**10. Abnormal Conditions, Pressures, Temperatures and Potential Hazards:**

No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 120 degrees and estimated maximum bottom hole pressure is 2250 psig. Low levels of Hydrogen sulfide have been monitors in producing wells in the area, so H2S may be present while drilling of the well; a plan is attached to the Drilling program. No major loss of circulation zones has been reported in offsetting wells.


---

**11. Anticipated Starting Date and Duration of Operations:**

Road and location work will not begin until approval has been received from the BLM. The anticipated spud date is December 1, 2009. Once commenced, the drilling operation should be finished in approximately 30 days. If the well is productive, an additional 30-60 days will be required for completion and testing before a decision is made to install permanent facilities.

**1. Well Site Layout:**

- A. The drill pad layout, with elevations staked by John West Engineering, is shown in Exhibit #6. Dimensions of the pad are shown. Topsoil, if available, will be stockpiled per BLM specifications. Because the pad is almost level no major cuts will be required.
- B. Diagram below shows the proposed orientation of the location. No permanent living facilities are planned, but a temporary foreman/toolpusher's trailer will be on location during the drilling operations.

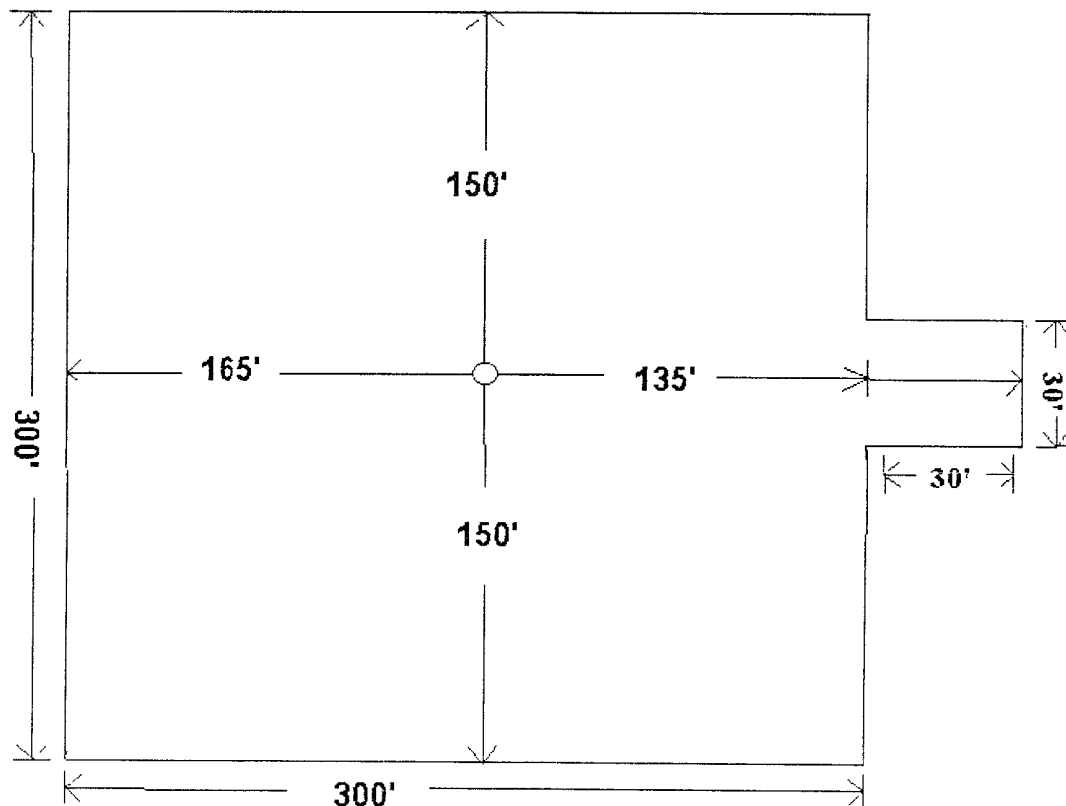

*Exhibit #6*




**Attachment to Exhibit #9**  
**NOTES REGARDING THE BLOWOUT PREVENTERS**  
Peery Federal #9  
Chaves County, New Mexico

1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

**Mack Energy Corporation**  
**Minimum Blowout Preventer Requirements**  
 3000 psi Working Pressure  
 3 MWP  
 EXHIBIT #10

**Stack Requirements**

NO	Items	Min I.D	Min Nominal
1	Flowline		2"
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min kill line and 3" min choke line outlets		2" Choke
6b	2" min kill line and 3" min. choke line outlets in ram (Alternate to 6a above)		
7	Valve Gate Plug	3 1/8	
8	Gate valve-power operated	3 1/8	
9	Line to choke manifold		3"
10	Valve Gate Plug	2 1/16	
11	Check valve	2 1/16	
12	Casing head		
13	Valve Gate Plug	1 13/16	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

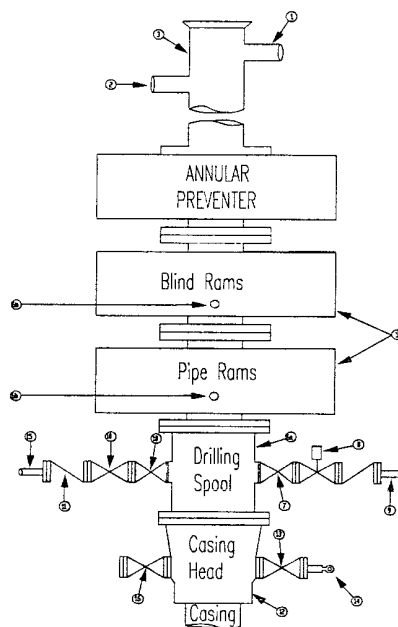

**OPTIONAL**

16	Flanged Valve	1 13/16	
----	---------------	---------	--

**CONTRACTOR'S OPTION TO FURNISH**

- 1 All equipment and connections above bradenhead or casinghead Working pressure of preventers to be 2000 psi minimum
- 2 Automatic accumulator (80 gallons, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
- 3 BOP controls, to be located near drillers' position
- 4 Kelly equipped with Kelly cock.
- 5 Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
- 6 Kelly saver-sub equipped with rubber casing protector at all times.
- 7 Plug type blowout preventer tester
- 8 Extra set pipe rams to fit drill pipe in use on location at all times
- 9 Type RX ring gaskets in place of Type R

**MEC TO FURNISH**

- 1 Bradenhead or casing head and side valves
- 2 Wear bushing If required

**GENERAL NOTES.**

- 1 Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager
- 2 All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke valves must be full opening and suitable for high pressure mud service
- 3 Controls to be of standard design and each marked, showing opening and closing position
- 4 Chokes will be positioned so as not to hamper or delay changing of choke beans

- 5 Replaceable parts for adjustable choke, or bean sizes, retainers, and choke wrenches to be conveniently located for immediate use
- 6 All valves to be equipped with hand-wheels or handles ready for immediate use.
- 7 Choke lines must be suitably anchored.
- 8 Handwheels and extensions to be connected and ready for use.
- 9 Valves adjacent to drilling spool to be kept open Use outside valves except for emergency
- 10 All seamless steel control piping (2000 psi working pressure) to have flexible joints to avoid stress Hoses will be permitted.
- 11 Casinghead connections shall not be used except in case of emergency
- 12 Does not use kill line for routine fill up operations

# Mack Energy Corporation


Exhibit #11

## MINIMUM CHOKE MANIFOLD

3,000, 5,000, and 10,000 PSI Working Pressure

3M will be used

3 MWP - 5 MWP - 10 MWP

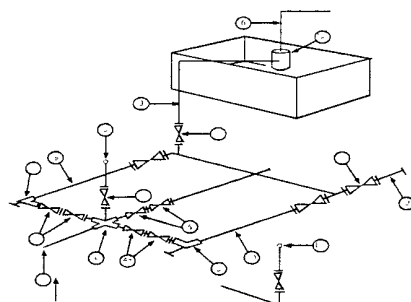

Mud Pit

Reserve Pit

\* Location of separator optional

Below Substructure

### Minimum requirements

No.		3,000 MWP			5,000 MWP			10,000 MWP		
		I.D.	Nominal	Rating	I.D.	Nominal	Rating	I.D.	Nominal	Rating
1	Line from drilling Spool		3"	3,000		3"	5,000		3"	10,000
2	Cross 3" x 3" x 3" x 2"			3,000			5,000			
2	Cross 3" x 3" x 3" x 2"									10,000
3	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
4	Valve Gate Plug	1 13/16		3,000	1 13/16		5,000	1 13/16		10,000
4a	Valves (1)	2 1/16		3,000	2 1/16		5,000	2 1/16		10,000
5	Pressure Gauge			3,000			5,000			10,000
6	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
7	Adjustable Choke (3)	2"		3,000	2"		5,000	2"		10,000
8	Adjustable Choke	1"		3,000	1"		5,000	2"		10,000
9	Line		3"	3,000		3"	5,000		3"	10,000
10	Line		2"	3,000		2"	5,000		2"	10,000
11	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
12	Line		3"	1,000		3"	1,000		3"	2,000
13	Line		3"	1,000		3"	1,000		3"	2,000
14	Remote reading compound Standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2' x 5'			2' x 5'			2' x 5'	
16	Line		4"	1,000		4"	1,000		4"	2,000
17	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000

(1) Only one required in Class 3M

(2) Gate valves only shall be used for Class 10 M


(3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling

### EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTION

- All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX Use only BX for 10 MWP.
- All lines shall be securely anchored
- Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available
- alternate with automatic chokes. a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge
- Line from drilling spool to choke manifold should be as straight as possible Lines downstream from chokes shall make turns by large bends or 90 degree bends using bull plugged tees

# Mack Energy Corporation

## MANIFOLD SCHEMATIC

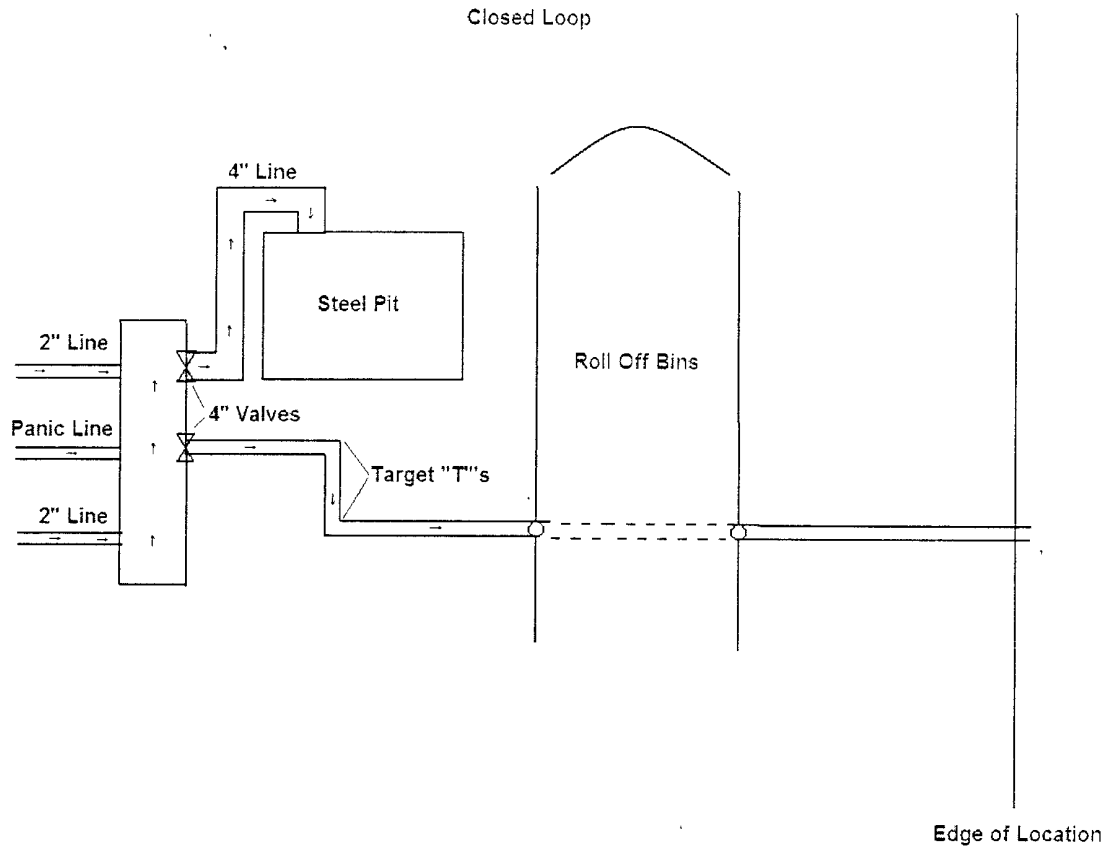

---

**Mack Energy Corporation**  
**Onshore Order #6**  
**Hydrogen Sulfide Drilling Operation Plan**

**I. HYDROGEN SULFIDE TRAINING**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H<sub>2</sub>S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H<sub>2</sub>S on metal components. If high tensile tubular are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H<sub>2</sub>S zone (within 3 days or 500 feet) and weekly H<sub>2</sub>S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan. The concentrations of H<sub>2</sub>S of wells in this area from surface to TD are low enough that a contingency plan is not required.

## II. H2S SAFETY EQUIPMENT AND SYSTEMS

Note: All H2S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H2S.

### 1. Well Control Equipment:

- A. Flare line.
- B. Choke manifold.
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
- D. Auxiliary equipment may include if applicable: annular preventer & rotating head.

### 2. Protective equipment for essential personnel:

- A. Mark II Survive air 30-minute units located in the doghouse and at briefing areas, as indicated on well site diagram.

### 3. H2S detection and monitoring equipment:

- A. 1 portable H2S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 PPM are reached.

### 4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram (Exhibit #8).
- B. Caution/Danger signs (Exhibit #7) shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.

### 5. Mud program:

- A. The mud program has been designed to minimize the volume of H2S circulated to surface. Proper mud weight, safe drilling practices and the use of H2S scavengers will minimize hazards when penetrating H2S bearing zones.

**6. Metallurgy:**

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H<sub>2</sub>S service.
- B. All elastomers used for packing and seals shall be H<sub>2</sub>S trim.

**7. Communication:**

- A. Radio communications in company vehicles including cellular telephone and 2-way radio.
- B. Land line (telephone) communication at Office.

**8. Well testing:**

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safely and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H<sub>2</sub>S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

**EXHIBIT #7**

**WARNING**  
**YOU ARE ENTERING AN H<sub>2</sub>S**  
**AUTHORIZED PERSONNEL ONLY**


- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CHECK WITH MACK ENERGY FOREMAN AT OFFICE**

**MACK ENERGY CORPORATION**

**1-575-748-1288**

## DRILLING LOCATION H2S SAFETY EQUIPMENT

Exhibit # 8

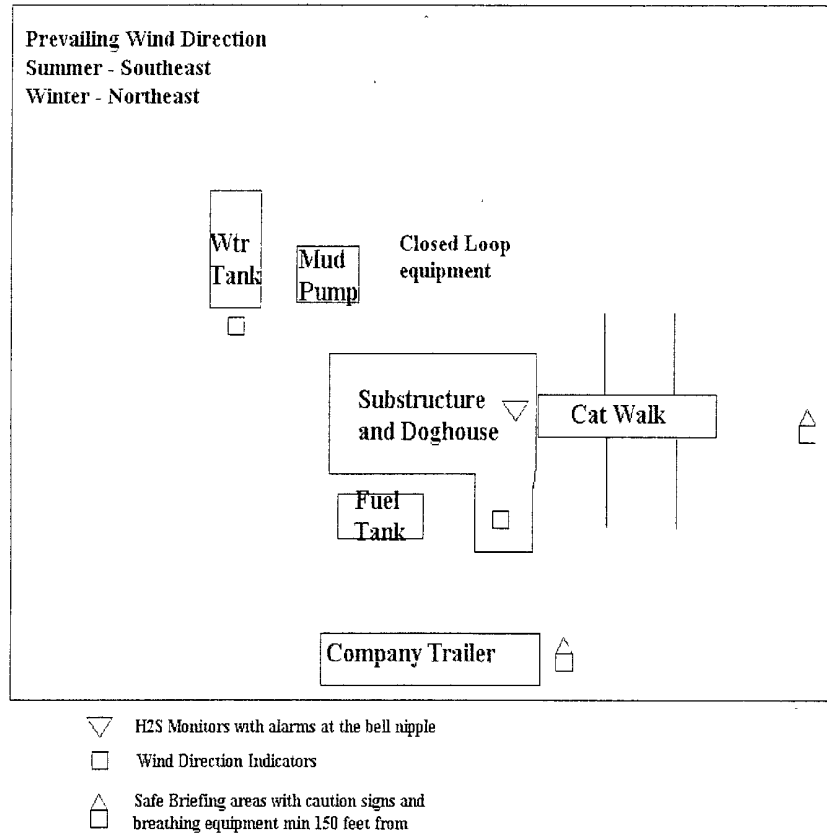



**Mack Energy Corporation Call List, Chaves County**


<b>Artesia (575)</b>	<b>Cellular</b>	<b>Office</b>	<b>Home</b>
Jim Krogman.....	746-5515.....	748-1288.....	746-2674
Lonnie Archer.....	746-7889.....	748-1288.....	365-2998
Donald Archer.....	748-7875.....	748-1288.....	748-2287
Chris Davis.....	746-7132.....	748-1288.....	
Kevin Garrett.....	746-7423.....	748-1288.....	

**Agency Call List (575)****Roswell**

State Police.....	622-7200
City Police.....	624-6770
Sheriff's Office.....	624-7590
Ambulance.....	624-7590
Fire Department.....	624-7590
LEPC (Local Emergency Planning Committee.....	624-6770
NMOCD.....	748-1283
Bureau of Land Management.....	627-0272

**Emergency Services**

Boots & Coots IWC.....	1-800-256-9688 or (281)931-8884
Cudd pressure Control.....	(915)699-0139 or (915)563-3356
Halliburton.....	746-2757
B. J. Services.....	746-3569
Flight For Life-Lubbock, TX.....	(806)743-9911
Aerocare-Lubbock, TX.....	(806)747-8923
Med Flight Air Amb-Albuquerque, NM.....	(505)842-4433
Lifeguard Air Med Svc. Albuquerque, NM.....	(505)272-3115

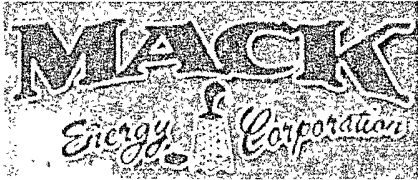

## **Mack Energy**

Chaves County

Peery Federal

#9

S-Well Pilot Hole

Plan: Plan #1

## **Pathfinder X & Y Planning Report**

10 November, 2009





# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



**Company:** Mack Energy  
**Project:** Chaves County  
**Site:** Peery Federal  
**Well:** #9  
**Wellbore:** S-Well Pilot Hole  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well #9  
**TVD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**MD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature  
**Database:** Midland Database

Project	Chaves County		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:		Peery Federal			
Site Position:		Northing:	721,535.600 ft	Latitude:	32° 58' 58.617 N
From:	Map	Easting:	620,821.500 ft	Longitude:	103° 56' 21.552 W
Position Uncertainty:	0 00 ft	Slot Radius:	"	Grid Convergence:	0 21 °

Well	#9					
Well Position	+N/-S	0 00 ft	Northing:	721,535.600 ft	Latitude:	32° 58' 58.617 N
	+E/-W	0 00 ft	Easting:	620,821.500 ft	Longitude:	103° 56' 21.552 W
Position Uncertainty		0 00 ft	Wellhead Elevation:	ft	Ground Level:	3.970 00 ft

Wellbore:	S-Well Pilot Hole				
Magnetics:	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	11/10/2009	7.99	60.88	49,217

Design		Plan #1		
Audit Notes:				
Version:		Phase:	PLAN	Tie On Depth: 0 00
Vertical Section:		Depth From (TVD)	+N/-S	+E/-W
		(ft)	(ft)	(ft)
		0 00	0 00	0.00
				Direction
				(°)
				180 00

Survey Tool Program		Date	11/10/2009		
From	To	Survey (Wellbore)	Tool Name	Description	
(ft)	(ft)				
0.00	9,016.41	Plan #1 (S-Well Pilot Hole)	MWD	MWD - Standard	



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: S-Well Pilot Hole  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989 00ft (19' KB Correction)  
North Reference: Grd  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
0.00	0.00	0.00	0.00	-3,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
100.00	0.00	0.00	100.00	-3,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
200.00	0.00	0.00	200.00	-3,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
300.00	0.00	0.00	300.00	-3,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
400.00	0.00	0.00	400.00	-3,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
500.00	0.00	0.00	500.00	-3,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
600.00	0.00	0.00	600.00	-3,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
700.00	0.00	0.00	700.00	-3,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
800.00	0.00	0.00	800.00	-3,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
900.00	0.00	0.00	900.00	-3,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,000.00	0.00	0.00	1,000.00	-2,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,100.00	0.00	0.00	1,100.00	-2,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,200.00	0.00	0.00	1,200.00	-2,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,300.00	0.00	0.00	1,300.00	-2,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,400.00	0.00	0.00	1,400.00	-2,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,500.00	0.00	0.00	1,500.00	-2,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,600.00	0.00	0.00	1,600.00	-2,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,700.00	0.00	0.00	1,700.00	-2,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,800.00	0.00	0.00	1,800.00	-2,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,900.00	0.00	0.00	1,900.00	-2,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,000.00	0.00	0.00	2,000.00	-1,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,100.00	0.00	0.00	2,100.00	-1,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,200.00	0.00	0.00	2,200.00	-1,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,300.00	0.00	0.00	2,300.00	-1,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,400.00	0.00	0.00	2,400.00	-1,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,500.00	0.00	0.00	2,500.00	-1,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,600.00	0.00	0.00	2,600.00	-1,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



**Company:** Mack Energy  
**Project:** Chaves County  
**Site:** Peery Federal  
**Well:** #9  
**Wellbore:** S-Well Pilot Hole  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well #9  
**TVD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**MD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature  
**Database:** Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V: Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
2,700.00	0.00	0.00	2,700.00	-1,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,800.00	0.00	0.00	2,800.00	-1,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,900.00	0.00	0.00	2,900.00	-1,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,000.00	0.00	0.00	3,000.00	-989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,100.00	0.00	0.00	3,100.00	-889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,200.00	0.00	0.00	3,200.00	-789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,300.00	0.00	0.00	3,300.00	-689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,400.00	0.00	0.00	3,400.00	-589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,500.00	0.00	0.00	3,500.00	-489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,600.00	0.00	0.00	3,600.00	-389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,700.00	0.00	0.00	3,700.00	-289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,800.00	0.00	0.00	3,800.00	-189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,900.00	0.00	0.00	3,900.00	-89.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,000.00	0.00	0.00	4,000.00	11.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,100.00	0.00	0.00	4,100.00	111.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,200.00	0.00	0.00	4,200.00	211.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,300.00	0.00	0.00	4,300.00	311.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,400.00	0.00	0.00	4,400.00	411.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,500.00	0.00	0.00	4,500.00	511.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,600.00	0.00	0.00	4,600.00	611.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,700.00	0.00	0.00	4,700.00	711.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,800.00	0.00	0.00	4,800.00	811.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,900.00	0.00	0.00	4,900.00	911.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
5,000.00	0.00	0.00	5,000.00	1,011.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
5,100.00	2.00	180.00	5,099.98	1,110.98	-1.75	0.00	1.75	2.00	721,533.85	620,821.50
5,200.00	4.00	180.00	5,199.84	1,210.84	-6.98	0.00	6.98	2.00	721,528.62	620,821.50
5,300.00	6.00	180.00	5,299.45	1,310.45	-15.69	0.00	15.69	2.00	721,519.91	620,821.50



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report




**Company:** Mack Energy  
**Project:** Chaves County  
**Site:** Peery Federal  
**Well:** #9  
**Wellbore:** S-Well Pilot Hole  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well #9  
**TVD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**MD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature  
**Database:** Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (%/100ft)	Northing (ft)	Easting (ft)
5,387.13	7.74	180.00	5,385.96	1,396.96	-26.12	0.00	26.12	2.00	721,509.48	620,821.50
5,400.00	7.74	180.00	5,398.71	1,409.71	-27.85	0.00	27.85	0.00	721,507.75	620,821.50
5,500.00	7.74	180.00	5,497.79	1,508.79	-41.32	0.00	41.32	0.00	721,494.28	620,821.50
5,600.00	7.74	180.00	5,596.88	1,607.88	-54.80	0.00	54.80	0.00	721,480.80	620,821.50
5,700.00	7.74	180.00	5,695.97	1,706.97	-68.27	0.00	68.27	0.00	721,467.33	620,821.50
5,800.00	7.74	180.00	5,795.06	1,806.06	-81.74	0.00	81.74	0.00	721,453.86	620,821.50
5,900.00	7.74	180.00	5,894.15	1,905.15	-95.21	0.00	95.21	0.00	721,440.39	620,821.50
6,000.00	7.74	180.00	5,993.24	2,004.24	-108.69	0.00	108.69	0.00	721,426.91	620,821.50
6,100.00	7.74	180.00	6,092.32	2,103.32	-122.16	0.00	122.16	0.00	721,413.44	620,821.50
6,200.00	7.74	180.00	6,191.41	2,202.41	-135.63	0.00	135.63	0.00	721,399.97	620,821.50
6,300.00	7.74	180.00	6,290.50	2,301.50	-149.10	0.00	149.10	0.00	721,386.50	620,821.50
6,400.00	7.74	180.00	6,389.59	2,400.59	-162.58	0.00	162.58	0.00	721,373.02	620,821.50
6,500.00	7.74	180.00	6,488.68	2,499.68	-176.05	0.00	176.05	0.00	721,359.55	620,821.50
6,600.00	7.74	180.00	6,587.77	2,598.77	-189.52	0.00	189.52	0.00	721,346.08	620,821.50
6,700.00	7.74	180.00	6,686.85	2,697.85	-202.99	0.00	202.99	0.00	721,332.61	620,821.50
6,800.00	7.74	180.00	6,785.94	2,796.94	-216.46	0.00	216.46	0.00	721,319.14	620,821.50
6,900.00	7.74	180.00	6,885.03	2,896.03	-229.94	0.00	229.94	0.00	721,305.66	620,821.50
6,929.28	7.74	180.00	6,914.04	2,925.04	-233.88	0.00	233.88	0.00	721,301.72	620,821.50
7,000.00	6.33	180.00	6,984.23	2,995.23	-242.54	0.00	242.54	2.00	721,293.06	620,821.50
7,100.00	4.33	180.00	7,083.79	3,094.79	-251.83	0.00	251.83	2.00	721,283.77	620,821.50
7,200.00	2.33	180.00	7,183.62	3,194.62	-257.64	0.00	257.64	2.00	721,277.96	620,821.50
7,300.00	0.33	180.00	7,283.59	3,294.59	-259.95	0.00	259.95	2.00	721,275.65	620,821.50
7,316.41	0.00	0.00	7,300.00	3,311.00	-260.00	0.00	260.00	2.00	721,275.60	620,821.50
Vertical TGT-S-Curve#9										
7,400.00	0.00	0.00	7,383.59	3,394.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
7,500.00	0.00	0.00	7,483.59	3,494.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
7,600.00	0.00	0.00	7,583.59	3,594.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: S-Well Pilot Hole  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989 00ft (19' KB Correction)  
North Reference: Grd  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg. (°/100ft)	Northing (ft)	Easting (ft)
7,700.00	0.00	0.00	7,683.59	3,694.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
7,800.00	0.00	0.00	7,783.59	3,794.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
7,900.00	0.00	0.00	7,883.59	3,894.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,000.00	0.00	0.00	7,983.59	3,994.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,100.00	0.00	0.00	8,083.59	4,094.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,200.00	0.00	0.00	8,183.59	4,194.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,300.00	0.00	0.00	8,283.59	4,294.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,400.00	0.00	0.00	8,383.59	4,394.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,500.00	0.00	0.00	8,483.59	4,494.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,600.00	0.00	0.00	8,583.59	4,594.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,700.00	0.00	0.00	8,683.59	4,694.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,800.00	0.00	0.00	8,783.59	4,794.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
8,900.00	0.00	0.00	8,883.59	4,894.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
9,000.00	0.00	0.00	8,983.59	4,994.59	-260.00	0.00	260.00	0.00	721,275.60	620,821.50
9,016.41	0.00	0.00	9,000.00	5,011.00	-260.00	0.00	260.00	0.00	721,275.60	620,821.50



### Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
hit/miss target									
Shape									
Vertical TGT-S-Curve	0.00	0.00	7,300.00	-260.00	0.00	721,275.600	620,821.500	32° 58' 56.044 N	103° 56' 21.564 W
- plan hits target									
- Point									

Checked By: \_\_\_\_\_ Approved By: \_\_\_\_\_ Date: \_\_\_\_\_



Azimuths to Grid North  
True North -0.21°  
Magnetic North 7.78°  
  
Magnetic Field  
Strength: 49216 8snT  
Dip Angle 60.88°  
Date: 11/10/2009  
Model: IGRF200510

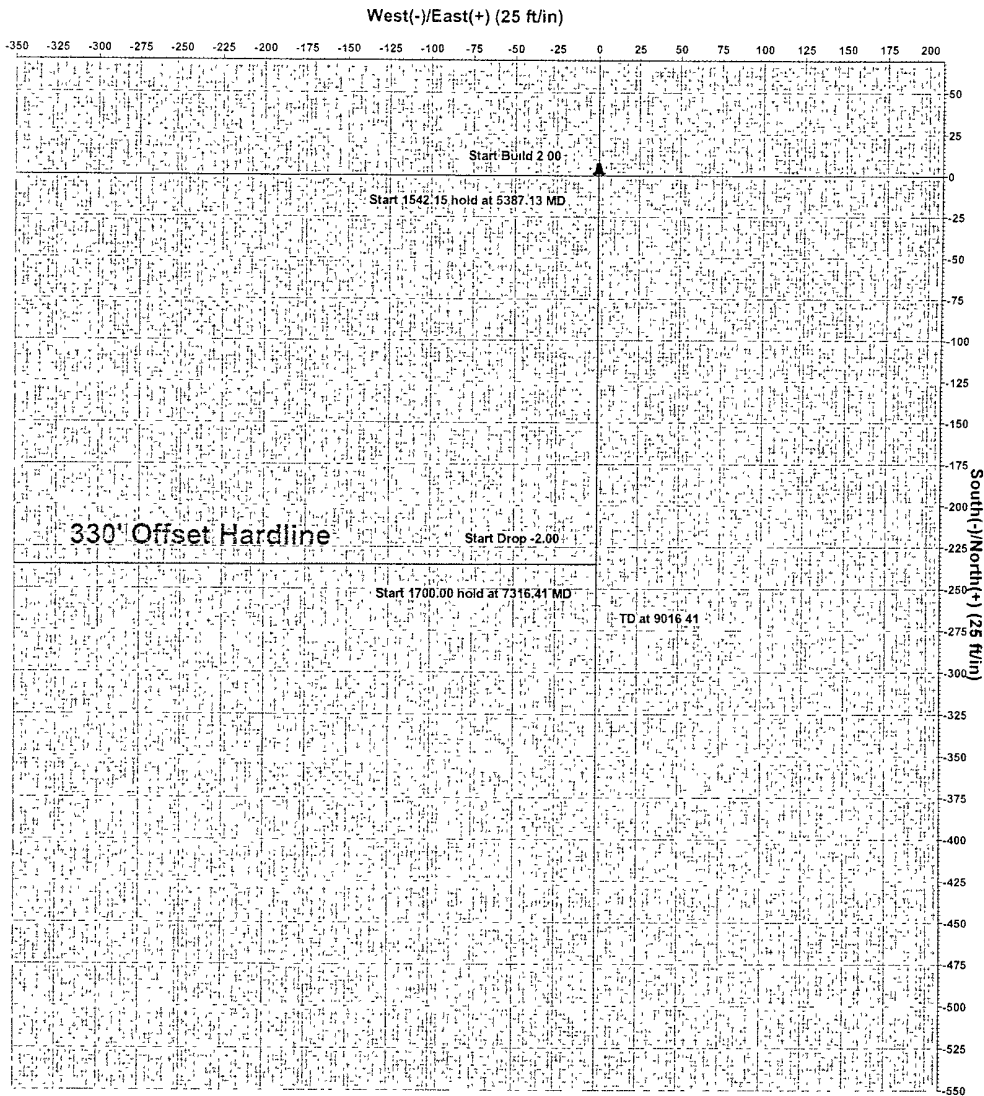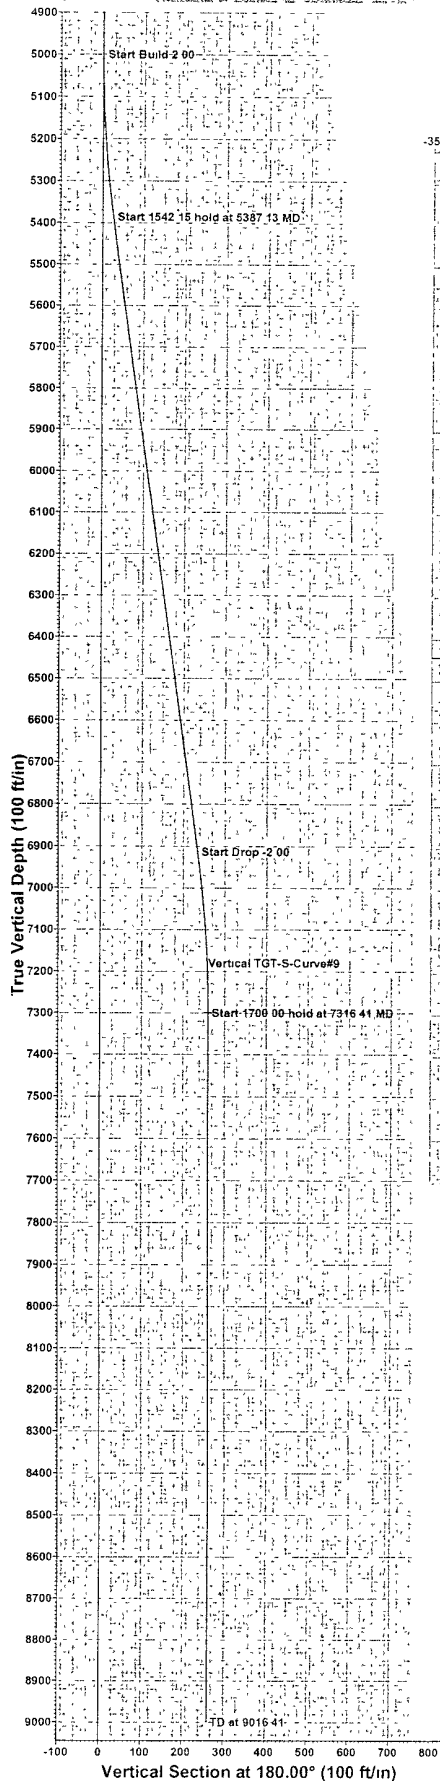

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	5000.00	0.00	0.00	5000.00	0.00	0.00	0.00	0.00	0.00	
3	5387.13	7.74	180.00	5385.96	-26.12	0.00	2.00	180.00	26.12	
4	6929.28	7.74	180.00	6914.04	-233.88	0.00	0.00	0.00	233.88	
5	7316.41	0.00	0.00	7300.00	-260.00	0.00	2.00	180.00	260.00	Vertical TGT-S-Curve#9
6	9016.41	0.00	0.00	9000.00	-260.00	0.00	0.00	0.00	260.00	

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)						
Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape Point
Vertical TGT-S-Curve#9	7300.00	-260.00	0.00	721275.600	620821.500	

WELL DETAILS #9							
Ground Elevation				3970.00			
RKB Elevation				WELL @ 3989.00ft (19' KB Correction)			
Rig Name				19' KB Correction			
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot	
0.00	0.00	721535.600	620821.500	32° 58' 58.617 N	103° 56' 21.562 W		

Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: S-Well Pilot Hole  
Plan: Plan #1 (#9/S-Well Pilot Hole)

PROJECT DETAILS Chaves County  
Geodetic System US State Plane 1927 (Exact solution)  
Datum NAD 1927 (NADCON CONUS)  
Ellipsoid Clarke 1866  
Zone New Mexico East 3001  
System Datum Mean Sea Level  
Local North Grid

Plan Plan #1 (#9/S-Well Pilot Hole)			
Created By	Nate Bingham	Date	14 13, November 10 2009
Checked		Date	





## **Mack Energy**

Chaves County

Peery Federal

#9

OH

Plan: Plan #1

## **Pathfinder X & Y Planning Report**

10 November, 2009

The word "PATHFINDER" in a large, bold, sans-serif font. The letters are filled with a dense, stippled pattern. A thick, dark, curved line sweeps under the word from the left, ending under the "FINDER" part.



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



**Company:** Mack Energy  
**Project:** Chaves County  
**Site:** Peery Federal  
**Well:** #9  
**Wellbore:** OH  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well #9  
**TVD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**MD Reference:** WELL @ 3989.00ft (19' KB Correction)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature  
**Database:** Midland Database

**Project:** Chaves County

**Map System:** US State Plane 1927 (Exact solution)  
**Geo Datum:** NAD 1927 (NADCON CONUS)  
**Map Zone:** New Mexico East 3001

**System Datum:** Mean Sea Level

**Site:** Peery Federal

<b>Site Position:</b>		<b>Northing:</b>	721,535.600 ft	<b>Latitude:</b>	32° 58' 58.617 N
<b>From:</b> Map		<b>Easting:</b>	620,821.500 ft	<b>Longitude:</b>	103° 56' 21.552 W
<b>Position Uncertainty:</b>	0.00 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b>	0.21 °

<b>Well:</b> #9					
<b>Well Position</b>	+N/-S	0.00 ft	<b>Northing:</b>	721,535.600 ft	<b>Latitude:</b> 32° 58' 58.617 N
	+E/-W	0.00 ft	<b>Easting:</b>	620,821.500 ft	<b>Longitude:</b> 103° 56' 21.552 W
<b>Position Uncertainty</b>		0.00 ft	<b>Wellhead Elevation:</b>	ft	<b>Ground Level:</b> 3,970.00 ft

**Wellbore:** OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	11/10/2009	7.99	60.88	49,217

**Design:** Plan #1

**Audit Notes:**

**Version:** **Phase:** PLAN **Tie On Depth:** 8,030.00

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	266.68



# Pathfinder Energy Services Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Grid  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

Survey Tool Program Date 11/10/2009

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.00	8,030.00	Plan #1 (S-Well Pilot Hole)	MWD	MWD - Standard
8,030.00	13,029.68	Plan #1 (OH)	MWD	MWD - Standard

## Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
0.00	0.00	0.00	0.00	-3,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
100.00	0.00	0.00	100.00	-3,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
200.00	0.00	0.00	200.00	-3,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
300.00	0.00	0.00	300.00	-3,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
400.00	0.00	0.00	400.00	-3,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
500.00	0.00	0.00	500.00	-3,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
600.00	0.00	0.00	600.00	-3,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
700.00	0.00	0.00	700.00	-3,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
800.00	0.00	0.00	800.00	-3,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
900.00	0.00	0.00	900.00	-3,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,000.00	0.00	0.00	1,000.00	-2,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,100.00	0.00	0.00	1,100.00	-2,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,200.00	0.00	0.00	1,200.00	-2,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,300.00	0.00	0.00	1,300.00	-2,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,400.00	0.00	0.00	1,400.00	-2,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,500.00	0.00	0.00	1,500.00	-2,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,600.00	0.00	0.00	1,600.00	-2,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,700.00	0.00	0.00	1,700.00	-2,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,800.00	0.00	0.00	1,800.00	-2,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
1,900.00	0.00	0.00	1,900.00	-2,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,000.00	0.00	0.00	2,000.00	-1,989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Grid  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
2,100.00	0.00	0.00	2,100.00	-1,889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,200.00	0.00	0.00	2,200.00	-1,789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,300.00	0.00	0.00	2,300.00	-1,689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,400.00	0.00	0.00	2,400.00	-1,589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,500.00	0.00	0.00	2,500.00	-1,489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,600.00	0.00	0.00	2,600.00	-1,389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,700.00	0.00	0.00	2,700.00	-1,289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,800.00	0.00	0.00	2,800.00	-1,189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
2,900.00	0.00	0.00	2,900.00	-1,089.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,000.00	0.00	0.00	3,000.00	-989.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,100.00	0.00	0.00	3,100.00	-889.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,200.00	0.00	0.00	3,200.00	-789.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,300.00	0.00	0.00	3,300.00	-689.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,400.00	0.00	0.00	3,400.00	-589.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,500.00	0.00	0.00	3,500.00	-489.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,600.00	0.00	0.00	3,600.00	-389.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,700.00	0.00	0.00	3,700.00	-289.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,800.00	0.00	0.00	3,800.00	-189.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
3,900.00	0.00	0.00	3,900.00	-89.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,000.00	0.00	0.00	4,000.00	11.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,100.00	0.00	0.00	4,100.00	111.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,200.00	0.00	0.00	4,200.00	211.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,300.00	0.00	0.00	4,300.00	311.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,400.00	0.00	0.00	4,400.00	411.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,500.00	0.00	0.00	4,500.00	511.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,600.00	0.00	0.00	4,600.00	611.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50
4,700.00	0.00	0.00	4,700.00	711.00	0.00	0.00	0.00	0.00	721,535.60	620,821.50



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Gnd  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
7,300.00	0 33	180.00	7,283.59	3,294.59	-259 95	0.00	15.05	2.00	721,275.65	620,821 50
7,316.41	0.00	0.00	7,300 00	3,311.00	-260 00	0.00	15.06	2 00	721,275.60	620,821 50
7,400.00	0 00	0 00	7,383 59	3,394.59	-260.00	0 00	15.06	0.00	721,275 60	620,821 50
7,500 00	0 00	0 00	7,483.59	3,494 59	-260.00	0.00	15 06	0 00	721,275.60	620,821.50
7,600 00	0 00	0 00	7,583.59	3,594.59	-260.00	0.00	15 06	0 00	721,275 60	620,821.50
7,700 00	0 00	0.00	7,683.59	3,694.59	-260.00	0.00	15 06	0.00	721,275 60	620,821 50
7,800 00	0 00	0.00	7,783.59	3,794.59	-260.00	0.00	15.06	0.00	721,275 60	620,821 50
7,900.00	0.00	0 00	7,883.59	3,894.59	-260.00	0.00	15.06	0 00	721,275.60	620,821.50
8,000.00	0 00	0 00	7,983.59	3,994 59	-260.00	0.00	15.06	0 00	721,275 60	620,821 50
8,030 00	0.00	0.00	8,013.59	4,024.59	-260.00	0.00	15 06	0.00	721,275.60	620,821.50
8,050.00	1.74	269.90	8,033 58	4,044.58	-260.00	-0.30	15.36	8.68	721,275.60	620,821 20
8,100 00	6 08	269.90	8,083.45	4,094.45	-260.01	-3.71	18.76	8 68	721,275 59	620,817.79
8,150.00	10.42	269 90	8,132.93	4,143 93	-260.02	-10.88	25.92	8 68	721,275.58	620,810 62
8,200.00	14 76	269.90	8,181.71	4,192 71	-260.04	-21.77	36.79	8 68	721,275.56	620,799 73
8,250 00	19.10	269.90	8,229.54	4,240 54	-260.06	-36.32	51 32	8.68	721,275 54	620,785 18
8,300 00	23 44	269.90	8,276 12	4,287.12	-260.10	-54.45	69 42	8 68	721,275.50	620,767 05
8,350.00	27.78	269.90	8,321 20	4,332.20	-260 13	-76.06	90 99	8 68	721,275 47	620,745.44
8,400 00	32 12	269.90	8,364.51	4,375.51	-260 13	-101.01	115.91	8 68	721,275.42	620,720 49
8,450.00	36 46	269 90	8,405.81	4,416.81	-260 13	-129.17	144.02	8.68	721,275.37	620,692 33
8,500 00	40 80	269.90	8,444.87	4,455 87	-260 28	-160.38	175.18	8 68	721,275 32	620,661 12
8,550 00	45 14	269 90	8,481.45	4,492 45	-260.34	-194.45	209 20	8.68	721,275 26	620,627.05
8,600.00	49 48	269.90	8,515.34	4,526.34	-260.40	-231.19	245.88	8 68	721,275.20	620,590 31
8,650 00	53.82	269 90	8,546 36	4,557.36	-260.47	-270.39	285.02	8.68	721,275.13	620,551 11
8,700.00	58.16	269.90	8,574.32	4,585 32	-260.54	-311.82	326.39	8 68	721,275 06	620,509 68
8,750 00	62.50	269.90	8,599.07	4,610 07	-260.62	-355.26	369 75	8 68	721,274 98	620,466.24
8,800 00	66.84	269.90	8,620.46	4,631 46	-260 70	-400.44	414 86	8.68	721,274 90	620,421.06
8,850 00	71.18	269.90	8,638.37	4,649 37	-260.78	-447.11	461 46	8 68	721,274.82	620,374 39



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Grid  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
8,900.00	75.52	269.90	8,652.69	4,663.69	-260.86	-495.00	509.27	8.68	721,274.74	620,326.50
8,950.00	79.86	269.90	8,663.35	4,674.35	-260.95	-543.84	558.03	8.68	721,274.65	620,277.66
9,000.00	84.20	269.90	8,670.29	4,681.29	-261.04	-593.34	607.46	8.68	721,274.56	620,228.16
9,050.00	88.54	269.90	8,673.45	4,684.45	-261.12	-643.23	657.27	8.68	721,274.48	620,178.27
9,096.58	92.58	269.90	8,673.00	4,684.00	-261.20	-689.80	703.76	8.68	721,274.40	620,131.70
9,100.00	92.58	269.90	8,672.85	4,683.85	-261.21	-693.21	707.18	0.00	721,274.39	620,128.29
9,200.00	92.58	269.90	8,668.34	4,679.34	-261.38	-793.11	806.92	0.00	721,274.22	620,028.39
9,300.00	92.58	269.90	8,663.84	4,674.84	-261.56	-893.01	906.66	0.00	721,274.04	619,928.49
9,392.57	92.58	269.90	8,659.68	4,670.68	-261.72	-985.49	998.99	0.00	721,273.88	619,836.01
9,394.11	92.55	269.90	8,659.61	4,670.61	-261.72	-987.03	1,000.53	2.00	721,273.88	619,834.47
TGT1 1000'VS(#9H)										
9,400.00	92.43	269.90	8,659.35	4,670.35	-261.73	-992.91	1,006.40	2.00	721,273.87	619,828.59
9,423.96	91.95	269.90	8,658.44	4,669.44	-261.78	-1,016.85	1,030.30	2.00	721,273.82	619,804.65
9,500.00	91.95	269.90	8,655.84	4,666.84	-261.91	-1,092.85	1,106.18	0.00	721,273.69	619,728.65
9,600.00	91.95	269.90	8,652.44	4,663.44	-262.09	-1,192.79	1,205.96	0.00	721,273.51	619,628.71
9,700.00	91.95	269.90	8,649.03	4,660.03	-262.26	-1,292.73	1,305.75	0.00	721,273.34	619,528.77
9,800.00	91.95	269.90	8,645.62	4,656.62	-262.44	-1,392.67	1,405.53	0.00	721,273.16	619,428.83
9,900.00	91.95	269.90	8,642.22	4,653.22	-262.61	-1,492.61	1,505.32	0.00	721,272.99	619,328.89
9,994.44	91.95	269.90	8,639.00	4,650.00	-262.78	-1,587.00	1,599.55	0.00	721,272.82	619,234.50
TGT2 1600'VS(#9H)										
10,000.00	91.84	269.90	8,638.82	4,649.82	-262.79	-1,592.56	1,605.10	2.00	721,272.81	619,228.94
10,085.89	90.12	269.90	8,637.34	4,648.34	-262.94	-1,678.43	1,690.84	2.00	721,272.66	619,143.07
10,100.00	90.12	269.90	8,637.31	4,648.31	-262.97	-1,692.54	1,704.93	0.00	721,272.63	619,128.96
10,200.00	90.12	269.90	8,637.10	4,648.10	-263.14	-1,792.54	1,804.77	0.00	721,272.46	619,028.96
10,245.46	90.12	269.90	8,637.00	4,648.00	-263.22	-1,838.00	1,850.16	0.00	721,272.38	618,983.50
TGT3 1850'VS(#9H)										
10,264.75	89.74	269.90	8,637.02	4,648.02	-263.25	-1,857.29	1,869.41	2.00	721,272.35	618,964.21



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Grid  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey:

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
10,300.00	89.74	269.90	8,637.18	4,648.18	-263.32	-1,892.54	1,904.61	0.00	721,272.28	618,928.96
10,400.00	89.74	269.90	8,637.64	4,648.64	-263.49	-1,992.54	2,004.45	0.00	721,272.11	618,828.96
10,500.00	89.74	269.90	8,638.10	4,649.10	-263.67	-2,092.54	2,104.29	0.00	721,271.93	618,728.96
10,600.00	89.74	269.90	8,638.56	4,649.56	-263.84	-2,192.53	2,204.13	0.00	721,271.76	618,628.97
10,696.47	89.74	269.90	8,639.00	4,650.00	-264.01	-2,289.00	2,300.45	0.00	721,271.59	618,532.50
TGT4 2300'VS(#9H)										
10,700.00	89.67	269.90	8,639.02	4,650.02	-264.02	-2,292.53	2,303.98	2.00	721,271.58	618,528.97
10,724.85	89.17	269.90	8,639.27	4,650.27	-264.06	-2,317.38	2,328.78	2.00	721,271.54	618,504.12
10,800.00	89.17	269.90	8,640.36	4,651.36	-264.19	-2,392.52	2,403.81	0.00	721,271.41	618,428.98
10,900.00	89.17	269.90	8,641.81	4,652.81	-264.37	-2,492.51	2,503.64	0.00	721,271.23	618,328.99
11,000.00	89.17	269.90	8,643.26	4,654.26	-264.54	-2,592.50	2,603.47	0.00	721,271.06	618,229.00
11,100.00	89.17	269.90	8,644.70	4,655.70	-264.72	-2,692.49	2,703.30	0.00	721,270.88	618,129.01
11,200.00	89.17	269.90	8,646.15	4,657.15	-264.89	-2,792.48	2,803.14	0.00	721,270.71	618,029.02
11,300.00	89.17	269.90	8,647.60	4,658.60	-265.07	-2,892.47	2,902.97	0.00	721,270.53	617,929.03
11,396.54	89.17	269.90	8,649.00	4,660.00	-265.24	-2,989.00	2,999.34	0.00	721,270.36	617,832.50
TGT5 3000'VS(#9H)										
11,400.00	89.10	269.90	8,649.05	4,660.05	-265.25	-2,992.46	3,002.80	2.00	721,270.35	617,829.04
11,412.28	88.86	269.90	8,649.27	4,660.27	-265.27	-3,004.74	3,015.06	2.00	721,270.33	617,816.76
11,500.00	88.86	269.90	8,651.02	4,662.02	-265.42	-3,092.44	3,102.62	0.00	721,270.18	617,729.06
11,600.00	88.86	269.90	8,653.02	4,664.02	-265.60	-3,192.42	3,202.44	0.00	721,270.00	617,629.08
11,700.00	88.86	269.90	8,655.02	4,666.02	-265.77	-3,292.40	3,302.27	0.00	721,269.83	617,529.10
11,800.00	88.86	269.90	8,657.02	4,668.02	-265.95	-3,392.38	3,402.09	0.00	721,269.65	617,429.12
11,900.00	88.86	269.90	8,659.02	4,670.02	-266.12	-3,492.36	3,501.91	0.00	721,269.48	617,329.14
12,000.00	88.86	269.90	8,661.01	4,672.01	-266.30	-3,592.34	3,601.73	0.00	721,269.30	617,229.16
12,100.00	88.86	269.90	8,663.01	4,674.01	-266.47	-3,692.32	3,701.56	0.00	721,269.13	617,129.18
12,200.00	88.86	269.90	8,665.01	4,676.01	-266.65	-3,792.30	3,801.38	0.00	721,268.95	617,029.20
12,300.00	88.86	269.90	8,667.01	4,678.01	-266.83	-3,892.28	3,901.20	0.00	721,268.77	616,929.22



# Pathfinder Energy Services

## Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989 00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Gnd  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database

### Planned Survey

MD (ft)	Inc (°)	Azi (°)	TVD (ft)	TVDSS (ft)	N/S (ft)	E/W (ft)	V. Sec (ft)	DLeg (°/100ft)	Northing (ft)	Easting (ft)
12,399.74	88.86	269.90	8,669.00	4,680.00	-267.00	-3,992.00	4,000.76	0.00	721,268.60	616,829.50
TGT6 4000'VS(#9H)										
12,459.85	90.06	269.90	8,669.57	4,680.57	-267.11	-4,052.10	4,060.77	2.00	721,268.49	616,769.40
12,500.00	90.06	269.90	8,669.53	4,680.53	-267.18	-4,092.26	4,100.86	0.00	721,268.42	616,729.24
12,600.00	90.06	269.90	8,669.43	4,680.43	-267.35	-4,192.26	4,200.70	0.00	721,268.25	616,629.24
12,700.00	90.06	269.90	8,669.33	4,680.33	-267.52	-4,292.26	4,300.54	0.00	721,268.08	616,529.24
12,800.00	90.06	269.90	8,669.23	4,680.23	-267.70	-4,392.26	4,400.39	0.00	721,267.90	616,429.24
12,900.00	90.06	269.90	8,669.13	4,680.13	-267.87	-4,492.26	4,500.23	0.00	721,267.73	616,329.24
13,000.00	90.06	269.90	8,669.03	4,680.03	-268.05	-4,592.25	4,600.07	0.00	721,267.55	616,229.25
13,029.75	90.06	269.90	8,669.00	4,680.00	-268.10	-4,622.00	4,629.77	0.00	721,267.50	616,199.50
PBHL(#9)										





Pathfinder Energy Services  
Pathfinder X & Y Planning Report



Company: Mack Energy  
Project: Chaves County  
Site: Peery Federal  
Well: #9  
Wellbore: OH  
Design: Plan #1

Local Co-ordinate Reference: Well #9  
TVD Reference: WELL @ 3989.00ft (19' KB Correction)  
MD Reference: WELL @ 3989.00ft (19' KB Correction)  
North Reference: Grid  
Survey Calculation Method: Minimum Curvature  
Database: Midland Database



Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
PBHL(#9) - plan hits target - Point	0.00	0.00	8,669.00	-268.10	-4,622.00	721,267.500	616,199.500	32° 58' 56.132 N	103° 57' 15.825 W
TGT4 2300'VS(#9H) - plan hits target - Point	0.00	0.00	8,639.00	-264.01	-2,289.00	721,271.590	618,532.500	32° 58' 56.089 N	103° 56' 48.436 W
TGT2 1600'VS(#9H) - plan hits target - Point	0.00	0.00	8,639.00	-262.78	-1,587.00	721,272.820	619,234.500	32° 58' 56.075 N	103° 56' 40.195 W
TGT5 3000'VS(#9H) - plan hits target - Point	0.00	0.00	8,649.00	-265.24	-2,989.00	721,270.360	617,832.500	32° 58' 56.102 N	103° 56' 56.654 W
TGT6 4000'VS(#9H) - plan hits target - Point	0.00	0.00	8,669.00	-267.00	-3,992.00	721,268.600	616,829.500	32° 58' 56.120 N	103° 57' 8.429 W
TGT1 1000'VS(#9H) - plan hits target - Point	0.00	0.00	8,659.00	-261.72	-987.00	721,273.880	619,834.500	32° 58' 56.064 N	103° 56' 33.151 W
TGT3 1850'VS(#9H) - plan hits target - Point	0.00	0.00	8,637.00	-263.22	-1,838.00	721,272.380	618,983.500	32° 58' 56.080 N	103° 56' 43.141 W

Checked By: \_\_\_\_\_

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

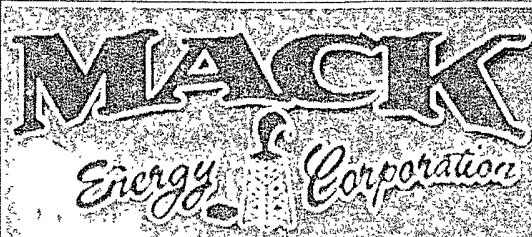


Azimuths to Grid North  
True North: -0.21°  
Magnetic North: 7.78°

Magnetic Field  
Strength: 49216.8nT  
Dip Angle: 60.88°  
Date 11/10/2009  
Model: IGRF200510



# PATHFINDER

WELLBORE TARGET DETAILS				
Name	TVD	+N/-S	+E/-W	Shape
TGT3 1850'VS(#9H)	8637.00	-263.22	-1838.00	Point
TGT2 1600'VS(#9H)	8639.00	-262.78	-1587.00	Point
TGT4 2300'VS(#9H)	8639.00	-264.01	-2289.00	Point
TGT5 3000'VS(#9H)	8649.00	-265.24	-2989.00	Point
TGT1 1000'VS(#9H)	8659.00	-261.72	-987.00	Point
PBHL(#9)	8669.00	-268.10	-4622.00	Point
TGT6 4000'VS(#9H)	8669.00	-267.00	-3992.00	Point

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	8030.00	0.00	0.00	8013.59	-260.00	0.00	0.00	0.00	15.06	
2	9096.58	92.58	269.90	8673.00	-261.20	-689.80	8.68	269.90	703.76	
3	9352.57	92.58	269.90	8659.68	-261.72	-985.49	0.00	0.00	998.99	TGT1 1000'VS(#9H)
4	9423.96	91.95	269.90	8658.44	-261.78	-1016.85	2.00	-179.91	1030.30	
5	9994.44	91.95	269.90	8639.00	-262.78	-1587.00	0.00	0.00	1599.55	TGT2 1600'VS(#9H)
6	10085.89	90.12	269.90	8637.34	-262.94	-1678.43	2.00	179.98	1690.84	
7	10245.46	90.12	269.90	8637.00	-263.22	-1838.00	0.00	0.00	1850.16	TGT3 1850'VS(#9H)
8	10264.75	89.74	269.90	8637.02	-263.25	-1857.29	2.00	-179.99	1869.41	
9	10596.47	89.74	269.90	8639.00	-264.01	-2289.00	0.00	0.00	2300.45	TGT4 2300'VS(#9H)
10	10724.85	89.17	269.90	8639.27	-264.06	-2317.38	2.00	-179.97	2328.78	
11	11396.54	89.17	269.90	8649.00	-265.24	-2989.00	0.00	0.00	2999.34	TGT5 3000'VS(#9H)
12	11412.28	88.86	269.90	8649.27	-265.27	-3004.74	2.00	179.97	3015.06	
13	12399.74	88.86	269.90	8669.00	-267.00	-3992.00	0.00	0.00	4000.76	TGT6 4000'VS(#9H)
14	12459.85	90.06	269.90	8669.57	-267.11	-4052.10	2.00	0.02	4060.77	
15	13029.75	90.06	269.90	8669.00	-268.10	-4622.00	0.00	0.00	4629.77	PBHL(#9)

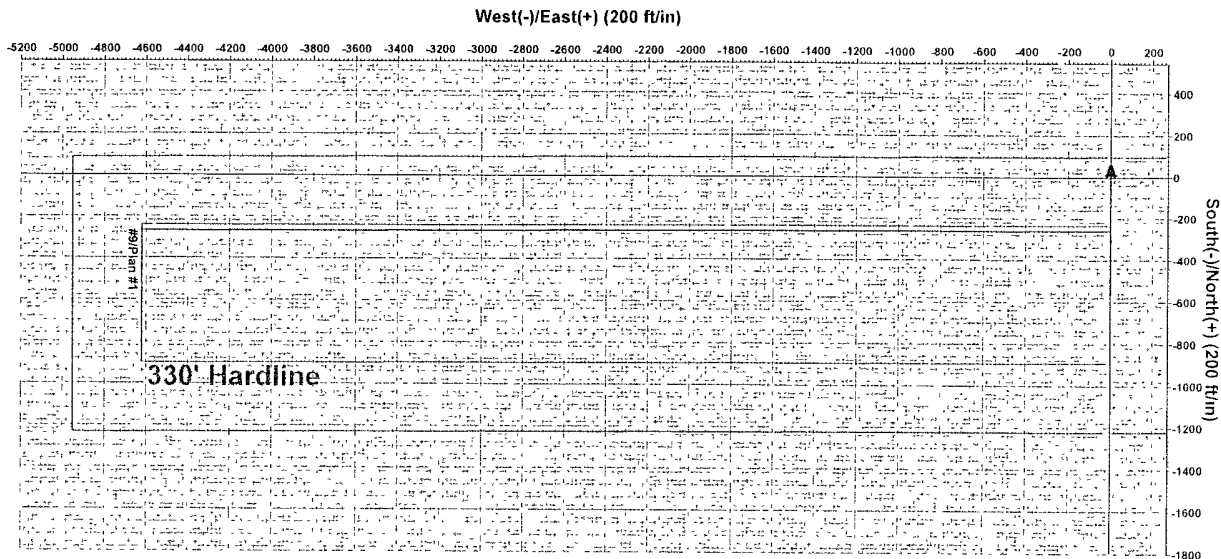

WELL DETAILS #9						
Ground Elevation 3970.00						
RKB Elevation WELL @ 3989.00R (19' KB Correction)						
Rig Name 19' KB Correction						
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.00	0.00	721535.600	620821.500	32° 58' 58.617 N	103° 56' 21.552 W	

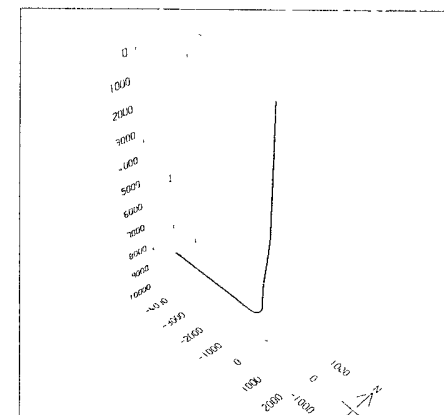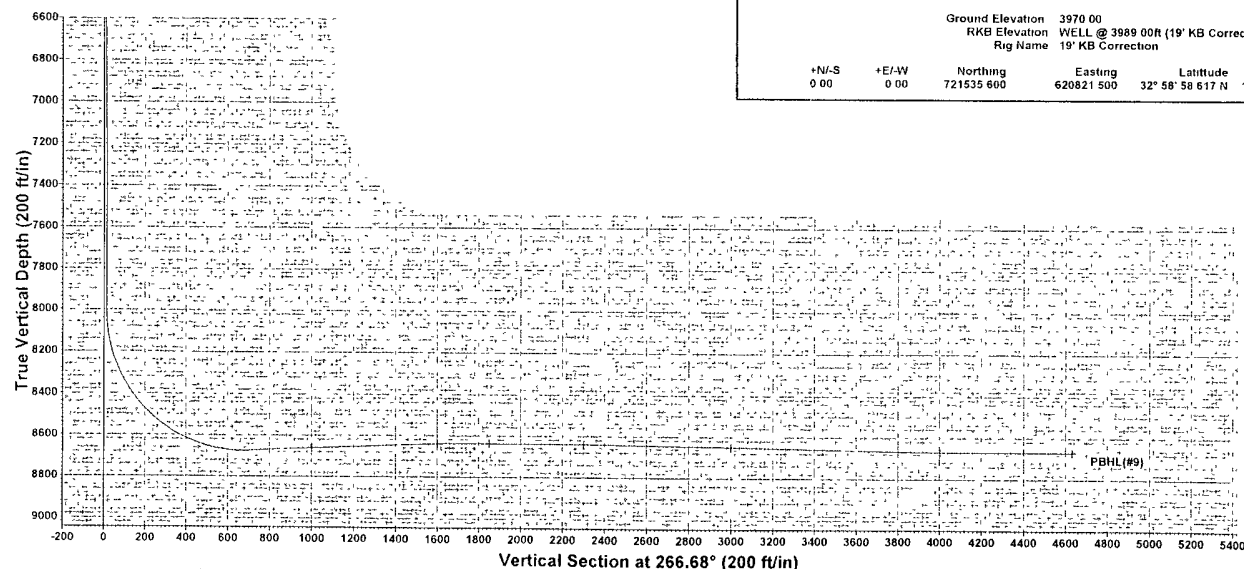

PROJECT DETAILS Chaves County  
Geodetic System US State Plane 1927 (Exact solution)  
Datum NAD 1927 (NADCON CONUS)  
Ellipsoid Clarke 1866  
Zone New Mexico East 3001  
System Datum Mean Sea Level  
Local North Grid

Plan Plan #1 (#910H)	
Created By Nate Bingham	Date 14 35, November 10 2009
Checked	Date

# EXHIBIT B

## PECOS DISTRICT - RFO CONDITIONS OF APPROVAL

December, 2009

OPERATORS NAME: Mack Energy Corporation

LEASE NO.: NM-119274

WELL NAME & NO: Peery Federal #9

SURFACE HOLE FOOTAGE: 1225' FSL & 330' FEL

BOTTOM HOLE FOOTAGE: 965' FSL & 330' FWL

LOCATION: Section 29, T. 15 S., R. 30 E.

COUNTY: Chaves County, New Mexico

### GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

### I. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD (Filing of a Sundry Notice is required for this 60 day extension).

### II. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

The project falls within the area covered by the Permian Basin Memorandum of Agreement (MOA). The Permian Basin MOA is an optional method of compliance with Section 106 of the National Historic Preservation Act for energy related projects in a 28 quadrangle area of the Pecos District a portion of which is within the Roswell Field Office. The proponent chose to participate in the Permian Basin MOA by planning to avoid all known NRHP eligible and potentially eligible cultural resources. The proponent has contributed funds commensurate to the undertaking into an account for offsite mitigation. Participation in the MOA serves as mitigation for the effects of this project on cultural resources. If any skeletal remains that might be human or funerary objects are discovered by any activities, the project proponent will cease activities in the area of discovery and notify the BLM within 24 hours as required by the Permian Basin MOA.

### **III. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations (access road and/or well pad). Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

### **IV. CONSTRUCTION**

#### **A. NOTIFICATION:**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Roswell Field Office at (505) 627-0209 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved Application for Permit to Drill and Conditions of Approval on the well site and they shall be made available upon request by the Authorized Officer.

#### **B. TOPSOIL:**

The operator shall stockpile the topsoil of the well pad. The topsoil to be stripped is approximately 6 inches in depth. The topsoil shall be used for interim and final reclamation. The soil shall be stockpiled on the southeast corner of the well pad.

#### **C. CLOSED LOOP SYSTEM: No reserve pit will be used.**

Steel tanks are required for drilling operations: No Pits Allowed.

The operator shall properly dispose of drilling contents at an authorized disposal site.

#### **D. FEDERAL MINERAL MATERIALS PIT:**

If the operator elects to surface the access road and/or well pad. Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Roswell Field Office at (505) 627-0236.

#### **E. WELL PAD SURFACING:**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational need.

#### **F. ON LEASE ACCESS ROADS:**

##### **Road Egress and Ingress**

The access road shall be constructed to access the northwest corner of the well pad. The access road will traverse the west side of the well location and will continue on to another well location

##### **Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

##### **Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.


The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

##### **Crowning**

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

## Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

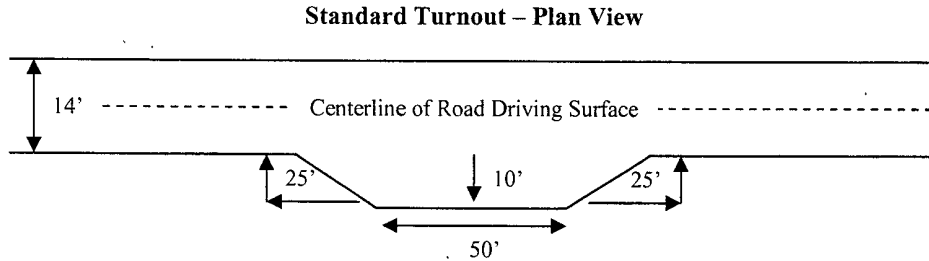

## Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

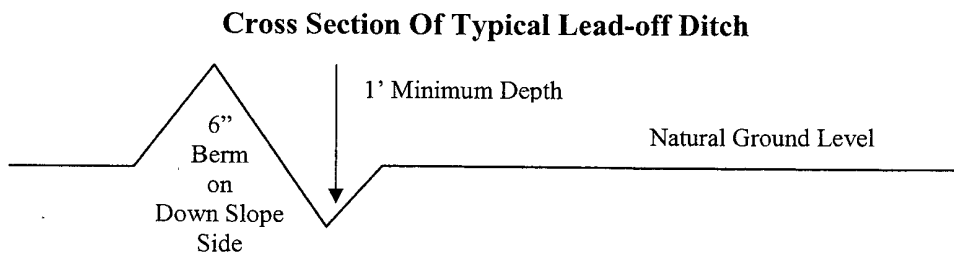

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

### Formula for Spacing Interval Of Lead-off Ditches


Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

## Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

**Figure 1 – Cross Sections and Plans For Typical Road Sections**

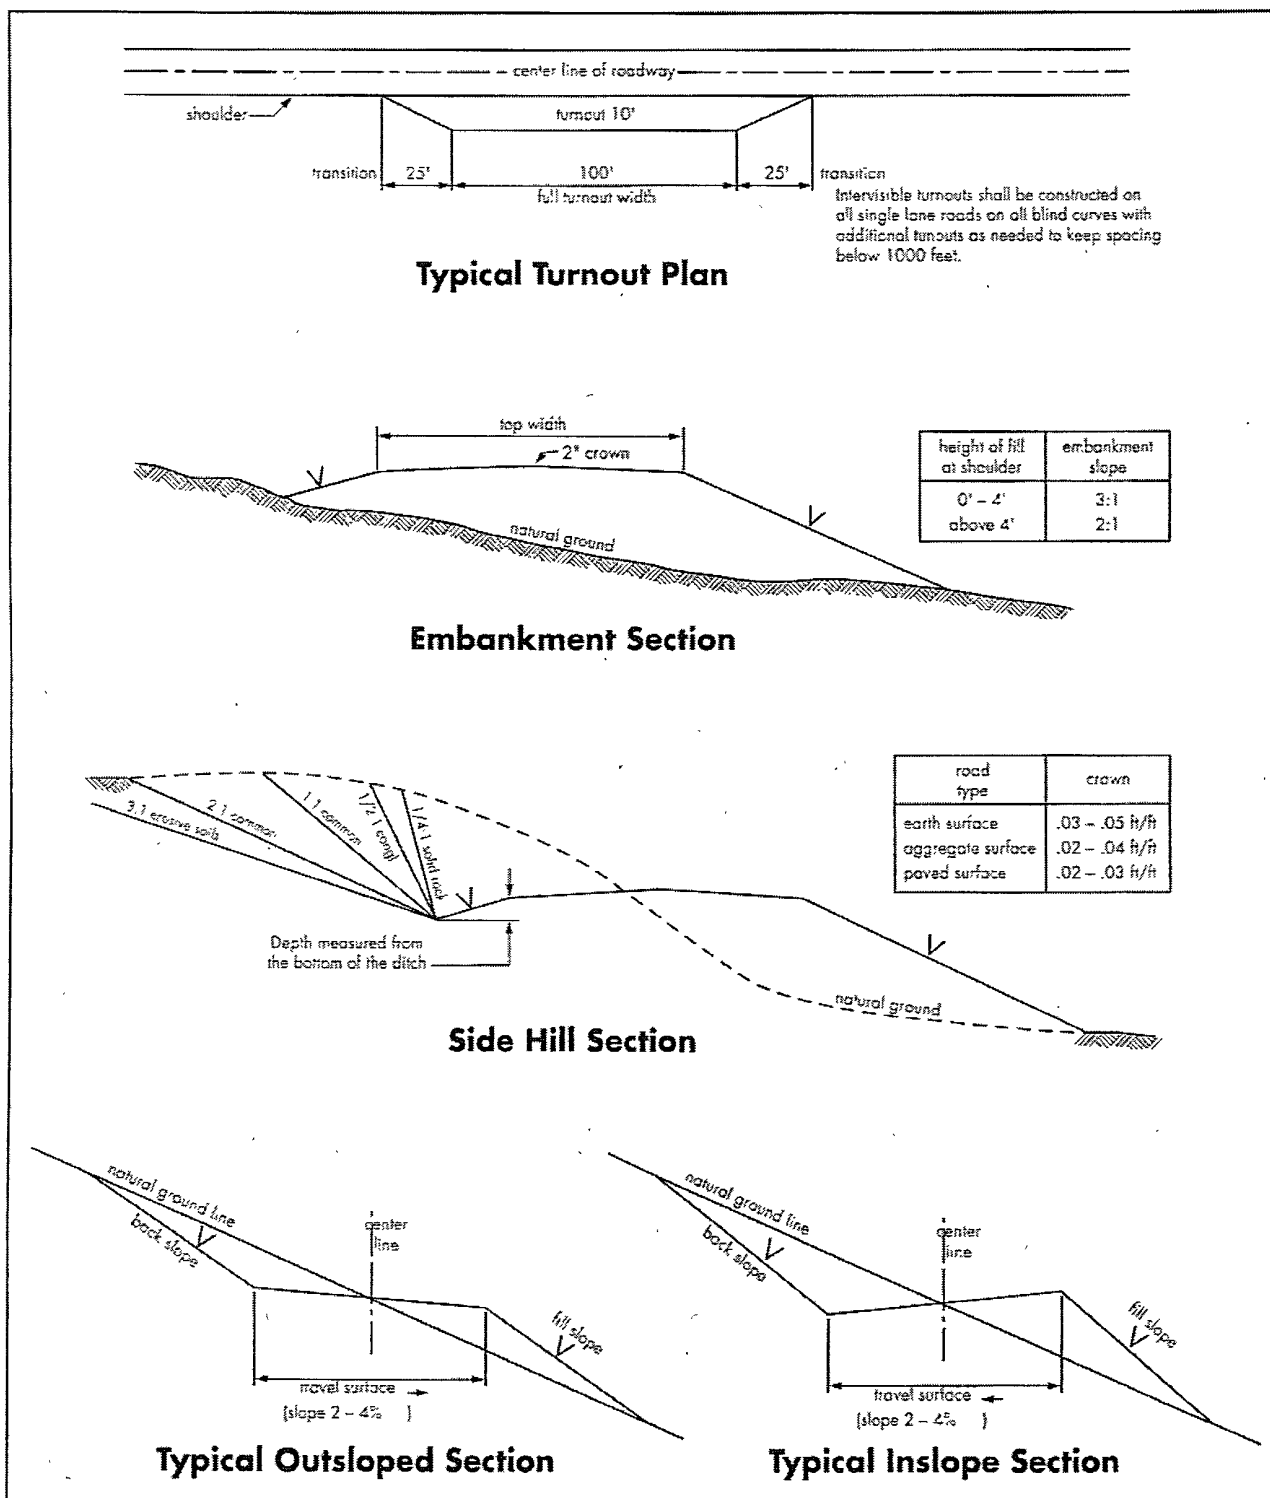

## **V. DRILLING**

### **A. DRILLING OPERATIONS REQUIREMENTS:**

1. Call the Roswell Field Office, 2909 West Second St., Roswell, NM 88201. During office hours call (575) 627-0205 or after office hours call (575) 910-6024. Engineer on call during office hours call (575) 627-0275 or after office hours call (575) 626-5749.
2. The BLM is to be notified a minimum of 24 hours in advance for a representative to witness:
  - a. Spudding well
  - b. Setting and/or Cementing of all casing strings

The BLM is to be notified a minimum of 24 hours in advance for a representative to witness:

#### **BOPE Tests**

3. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
4. Include the API Number assigned to well by NMOCD on the subsequent report of setting the first casing string.
5. The operator will accurately measure the drilling rate in ft/min to set the base of the usable water protection casing string(s) opposite competent rock. The record of the drilling rate along with the caliper-gamma ray-neutron well log run to surface will be submitted to this office as well as all other logs run on the borehole 30 days from completion
6. Fresh water and non toxic drilling mud shall be used to drill to the base of the usable water protection casing string(s). Any polymers used will be water based and non-toxic.

### **B. CASING**

#### **B. CASING**

1. The 9 5/8 inch usable water protection casing string(s) shall be set at approximately 450 feet opposite competent bedrock. The operator may have to drill a little deeper to set the surface casing the top 25 ft of the Rustler Anhydrite. In no way shall the surface casing be set in the Rustler Halite.
  - a. If cement does not circulate to the surface, the Roswell Field Office shall be notified and a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin or 500 pounds compression strength, whichever is greater. (This is to include the lead cement).
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compression strength, whichever is greater.



- d. If cement falls back, remedial action will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 7 inch intermediate casing is **sufficient to circulate to the surface**. If cement does not circulate see B.1.a-d above. **Optional**
3. The minimum required fill of cement behind the 5-1/2 inch production casing is **sufficient to tie back 500 feet true vertical depth above the uppermost perforation in the pay zone**. If cement does not circulate, a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
4. There is no required fill of cement behind the 4-1/2 inch production liner since a Isolation Packer will be used for lateral and will not require cementing.
5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

**C. PRESSURE CONTROL:**

1. Before drilling below the 9-5/8 inch surface casing shoe, the blowout preventer assembly shall consist of a minimum of One Annular Preventer or Two Ram-Type Preventers and a Kelly Cock/Stabbing Valve. Before drilling below the 7 or 5 1/2 inch intermediate casing shoe, the blowout preventer assembly shall consist of a minimum of One Annular Preventer, Two Ram-Type Preventers, and a Kelly Cock/Stabbing Valve.
2. Before drilling below the 9-5/8 inch surface casing shoe, minimum working pressure of the blowout preventer and related equipment (BOPE) shall be **2000** psi. Before drilling below the 7 or 5 1/2 inch intermediate casing shoe, minimum working pressure of the blowout preventer and related equipment (BOPE) shall be **3000** psi.
3. The BOPE shall be installed before drilling below the 9-5/8 inch surface casing and the 7 or 5-1/2 inch intermediate casing and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.
  - a. The BLM Roswell Field office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - b. The tests shall be done by an independent service company.
  - c. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.
  - d. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the BLM Roswell Field Office at

2909 West Second Street, Roswell, New Mexico 88201.

e. Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.

f. Testing must be done in a safe workman like manner. Hard line connections shall be required.

g. The requested variance to test the BOPE prior to drilling below the 9-5/8 inch surface casing to the reduced pressure of 1000 psi using the rig pumps is approved.

#### **D. DRILLING MUD**

1. Fresh water and non toxic drilling mud shall be used to 450 feet to drill the 14-3/4 inch hole for the 9-5/8 inch surface casing to be set at 450 feet.

### **VI. PRODUCTION**

#### **A. WELL STRUCTURES & FACILITIES**

##### **1. Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim re-contouring and re-vegetation of the well location.

##### **2. Containment Structures**

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

##### **3. Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, Juniper Green, Standard Environmental Colors.

### **VII. INTERIM RECLAMATION & RESERVE PIT CLOSURE**

#### **A. INTERIM RECLAMATION**

If the well is a producer, interim reclamation shall be conducted on the well site within 6 months of well completion. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses.

The operator should work with BLM surface management specialists to devise the best strategies to reduce the size of the location. Any reductions should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

## B. DPC SEED MIXTURE

During reclamation, the removal of caliche is important to increasing the success of re-vegetating the site. Removed caliche may be used in road repairs, fire walls or for building other roads and locations. In addition, in order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing re-vegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be re-vegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

The following seed mixture shall be used for interim reclamation and upon abandonment of the well on all areas of disturbance:

Sand Hills CP-2 Ecological Site		
Common Name and Preferred Variety	Scientific Name	Pounds of Pure Live Seed Per Acre
Sand bluestem	( <i>Andropogon hallii</i> )	0.50 lb.
Little bluestem	( <i>Schizachyrium scoparium</i> )	0.50 lb.
Sideoats grama,	( <i>Bouteloua curtipendula</i> )	1.50 lbs.
Sand dropseed	( <i>Sporobolus cryptandrus</i> )	0.50 lb.
Spike dropseed	( <i>S. contractus</i> )	0.50 lb.
Mesa dropseed	( <i>S. flexuosus</i> )	0.50 lb.
Plains bristlegrass	( <i>Setaria macrostachya</i> )	2.00 lbs.
Desert or Scarlet	( <i>Sphaeralcea ambigua</i> )	0.50 lb.
Globemallow or	( <i>S. coccinea</i> )	
Buckwheat	( <i>Eriogonum spp.</i> )	1.50 lbs.
TOTAL POUNDS PURE LIVE SEED (pls) PER ACRE		8.00 lbs.

IF ONE SPECIES IS NOT AVAILABLE, INCREASE ALL OTHER PROPORTIONATELY. NO LESS THAN SIX (6) SPECIES WITH A MINIMUM OF ONE (1) FORB. NO LESS THAN 8.0 POUNDS PLS PER ACRE SHALL BE APPLIED. CERTIFIED WEED FREE SEED.

## **VIII. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS**

During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. Earthwork for interim and final reclamation must be completed within 6 months of well completion or well plugging (weather permitting). The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used in road repairs, fire walls or for building other roads and locations. In addition, in order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

## **IX. Range Requirement**

The operator shall keep traffic to a minimum, with the speed limit less than 20 MPH. When conflicts with livestock do arise as a result of the access road and well pad construction, in consultation with the allottee, measures will be taken to resolve the conflicts.

## **X. Wildlife Requirement**

The operator shall cover with netting open top storage tanks and install cones on separator stacks.