

Subr Jun. 28. 2010, 12:11PM

Basic Energy Services
State of New MexicoNo. 8417 P. 2
Form C-103
May 27, 2004

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave., Artesia, NM 88218

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM
87505

Energy, Minerals and Natural Resources

RECEIVED

JUN 30 2010

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBSOCD

SUNDY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-21713
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator ConocoPhillips Company Attn: Donna Williams		6. State Oil & Gas Lease No. B-2519
3. Address of Operator 3300 N. "A" St, Bldg. 6 #247 Midland, Tx. 79705		7. Lease Name or Unit Agreement Name Santa Fe Battery 8
4. Well Location Unit Letter <u>B</u> <u>330</u> feet from the <u>North</u> line and <u>2310</u> feet from the <u>East</u> line Section <u>34</u> Township <u>17-S</u> Range <u>35-E</u> NMPM Lea County		8. Well number 113
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3925' GR		9. OGRID Number 217817
Pit or Below-grade Tank Application ☒ or Closure ☐		10. Pool name or Wildcat Vacuum; Yates
Pit type <u>STEEL</u> Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water <u>N/A</u>		
Pit Liner Thickness: <u>STEEL</u> mil Below-Grade Tank: Volume _____ bbls; Construction Material <u>STEEL</u>		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated late of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) MIRU, NU BOP. Tally in hole 2 1/2 Tbg to Tag BP @ 3,030'. Circ hole w/ MLF. Cap BP w/ 20sx cmt. WOC-Tag a.m.
- 2) POOH Tbg. Set PKR. Perf @ 1,729' - Sqz 70sx cmt, WOC-Tag
- 3) POOH Tbg. Perf @ 60' - Circ 50sx cmt to surface
- 4) RDMO

→ Perf & sqz 25sx cmt @ 400' woc-tag

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Greg Bryant TITLE P&A Tech DATE 06/28/10

Type or print name

For State Use Only

APPROVED BY: [Signature] TITLE STAFF MGR DATE 6-30-10


Conditions of Approval (if any):

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

WELLBORE SKETCH
ConocoPhillips Company - Lower 48 - Mid-Continent BU / Permian Operations

RKB @ 3938'
 DF @ 3937'
 GL @ 3925'

Date: June 2, 2010



12-1/4" Hole

6-5/8" 24# J-55 @ 1636'
 Cmt'd w/ 650 ex, clc 45 ex
 TOC @ Surface

Top Salt @ 1729'

TOC 4-1/2" Csg @ 2900' (T.S.)

4-1/2" EZ Drl BP @ 3030'

Yates
 3079 - 3082
 3089 - 3096

4-1/2" CIBP @ 3165'
 3183 - 3193
 Base of Salt @ 3244'
 4-1/2" CIBP @ 3262'

Cmt Plug 3502' - 3140'

Cmt Plug 5900' - 6200' w/ 25 ex
 Glorieta
 6163 - 6168
 6163 - 6168

7-7/8" Hole
 4-1/2" 9.5# J-55 @ 6250'
 Cmt'd w/ 800 ex
 TOC @ 2800' (T.S.)

PBTD: 3030'
 TD 8250'

Subarea: Buckeye
 Lease & Well No: Santa Fe 113
 Legal Description: 330' FNL & 2310' FEL, Sec 34, T17S, R35E, Unit Ltr 'B'
 County: Lea State: New Mexico
 Field: Vacuum, Yates
 Date Spudded: 9/16/65 Rig Released: 10/2/65
 API Number: 30-025-21713
 Status:

Stimulation History:

Interval	Date	Type	Qals	Lbs. Sand	Max Press	ISIP	Max Rate	Max Down
6153-6158	10/4/65	Perf w/ 2 J8PF 6153-6158 & 6163-6168						
6153-6168	10/6/65	15% HCl	3,600					
	2/18/66	15% HCl	600					
		Plugback						
		Plug #1 25 ex	6200-6900					
		Plug #2 25 ex	3502-3140					
3079-3096	2/17/66	Perforate Yates w/ 2 J8PF 3079-3082 & 3089-3096						
	2/18/66	Refined Oil	20,000	30,000	3400	2300		
	9/11/93	Cleanout from 3162-3260'						
	9/12/93	Set 4-1/2" CIBP @ 3262'						
	9/12/93	Perforate Yates w/ 2 J8PF 3183-3193, 22 holes						
3183-3193	9/16/93	15% HCl	1,000		2700	1840		
	9/18/93	Set 4-1/2" CIBP @ 3165'						
3079-3096	9/18/93	15% HCl	1,000		1580	690		
	9/19/01	Set 4-1/2" EZ Drl BP @ 3030'						


Formation Tops:

Rustler	1600'
Yates	2974'
Queen	3765'
San Andres	4420'
Glorieta Sand	8055'
Glorieta Dolomite	8152'

WELLBORE SKETCH
ConocoPhillips Company - Lower 48 - Mid-Continent BU / Permian Operations

Date June 2, 2010

RKB @ 3936'
 DF @ 3937'
 GL @ 3925'

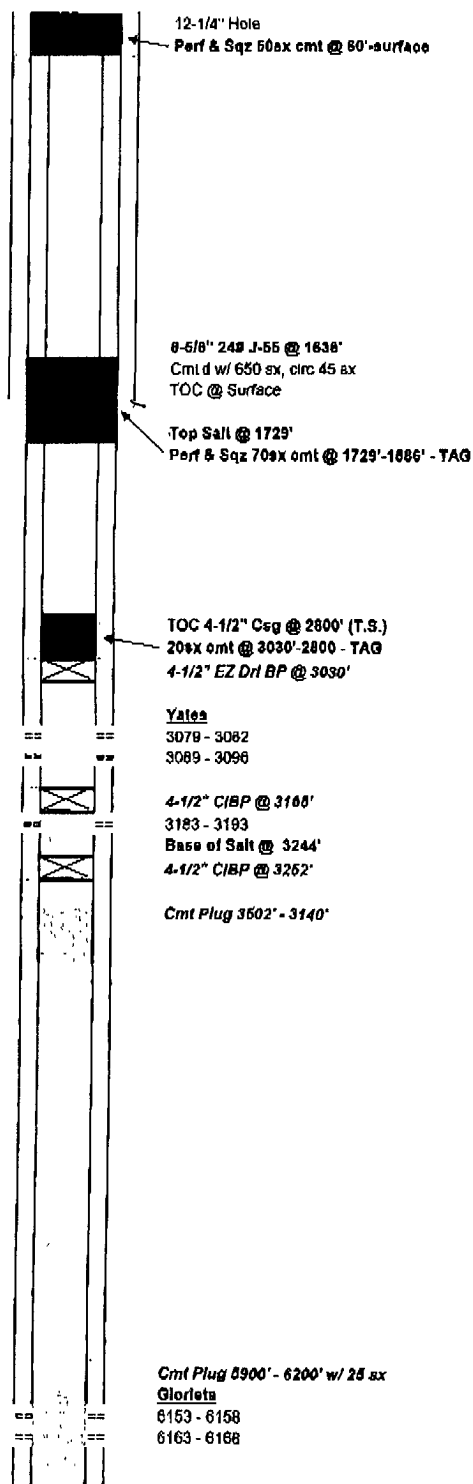

PBYD: 3030'
 TD: 6260'

7-7/8\" Hole
 4-1/2\" 9.5# J-55 @ 6280'
 Cmt'd w/ 900 sx
 TOC @ 2800' (T.S.)

Subarea Buckeye
 Lease & Well No. : Santa Fe 113
 Legal Description : 330' FNL & 2310' FEL, Sec 34, T17S, R35E, Unli Ltr "B"
 County Lea State : New Mexico
 Field : Vacuum, Yates
 Date Spudded : 9/16/65 Rig Released: 10/2/65
 API Number : 30-025-21713
 Status: _____

Stimulation History:

Interval	Date	Type	Gals	Lbs. Sand	Max Press	ISIP	Max Rate	Max Power
	10/4/65	Perf w/ 2 JSPF 6153-6168 & 6163-6168						
6153-6158	10/6/65	15% HCl	3,500					
6153-6168		15% HCl	500					
	2/16/68	Plugback						
		Plug #1 25 sx	6200-6900					
		Plug #2 25 sx	3502-3140					
	2/17/68	Perforate Yates w/ 2 JSPF 3079-3082 & 3089-3096						
3079-3096	2/18/68	Refined Oil	20,000	30,000	3400	2300		
	9/11/93	Cleanout from 3162-3260'						
	9/12/93	Set 4-1/2\" CIBP @ 3282'						
	9/12/93	Perforate Yates w/ 2 JSPF 3183-3193, 22 holes						
3183-3193	9/16/93	15% HCl	1,000		2700	1840		
	9/18/93	Set 4-1/2\" CIBP @ 3165'						
3079-3096	9/18/93	15% HCl	1,000		1560	690		
	9/19/01	Set 4-1/2\" EZ Drt BP @ 3030'						

Formation Tops:

Rustler	1600'
Yates	2874'
Queen	3755'
San Andres	4420'
Glorieta Sand	6065'
Glorieta Dolomite	6152'

Cmt Plug 6900' - 6200' w/ 25 sx
Glorieta
 6153 - 6158
 6163 - 6168



PLUGGING YARD - 1312
11114 W. I-20 E. - ODESSA, TX 79765
P. O. BOX 61877 - MIDLAND, TX 79711
PHONE: (432) 563-3355 FAX: (432) 563-3364

FACSIMILE TRANSMITTAL SHEET

TO:	BUDDY HILL / E.L. Gonzales	FROM:	GREG BRYANT
COMPANY:	NM OCD	DATE:	6/28/10
FAX NUMBER:	575.393.0720	TOTAL NO OF PAGES INCLUDING COVER:	9
PHONE NUMBER:		SENDER'S PHONE NUMBER:	(432) 563-3355
RE:	Santa Fe Battery 8 #113	SENDER'S FAX NUMBER:	(432) 563-3364

☐ URGENT ☒ FOR REVIEW ☐ PLEASE COMMENT ☐ PLEASE REPLY ☐ PLEASE RECYCLE

NOTES/COMMENTS:

Gentlemen—

Please review the attached C-103 and Closed Loop procedures for ConocoPhillips. If you need anything else from me, please let me know.

Thanks,
Greg