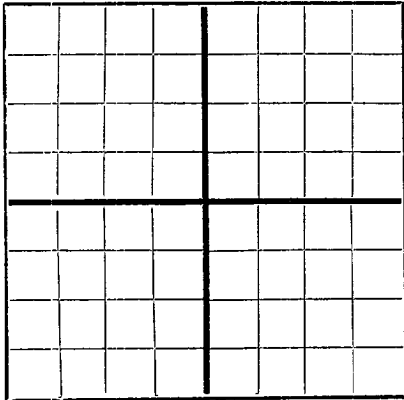


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Phillips Petroleum Company
Company or Operator
Box 1605, Hobbs, New Mexico
Address
Ostia Well No. 1 in NE/4 NW/4 of Sec. 32, T. 12-S
Lease
R. 32-E, N. M. P. M., Caprock Field, Lea County.
Well is 660 feet south of the North line and 661 feet west of the East line of NW/4.
If State land the oil and gas lease is No. B-10839 Assignment No. - -
If patented land the owner is - - - Address - - -
If Government land the permittee is - - - Address - - -
The Lessee is Phillips Petroleum Company Address Bartlesville, Okla.
Drilling commenced 9-22-48 19 Drilling was completed 10-8 1948
Name of drilling contractor George P. Livermore Address Lubbock, Texas
Elevation above sea level at top of casing 4369.30 feet. Ground
The information given is to be kept confidential until 3003 Not confidential 19

OIL SANDS OR ZONES

No. 1, from 3003 to 3029 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	24#	8rd.	Sals	382.24	Howco				Surface string
5 1/2"	17#	8rd.	Sals	2990.93	Howco				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4"	8 5/8"	295.91	200	Halliburton		
7 7/8"	5 1/2"	3003.40	1017	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3010 feet, and from feet to feet
Cable tools were used from 3010 feet to 3029 feet, and from feet to feet

PRODUCTION

Put to producing 10-12 1948
The production of the first 24 hours was 372 barrels of fluid of which 100 % was oil; %
emulsion; % water; and % sediment. Gravity, Be. 36.6
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Robinette Driller
Lewis Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13

day of October 1948

Th. C. Knight
Notary Public

My Commission expires November 28, 1950

My Commission expires

Robbs, New Mexico 10-13-48

Name M. A. Lester

Position District Chief Clerk

Representing Phillips Petroleum Co.

Address Box 1605, Hobbs, New Mexico

FORMATION RECORD

[illegible]