

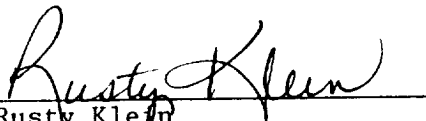
YATES PETROLEUM CORPORATION  
Patton AAR State #1  
Section 5-T9S-R32E  
Lea County, New Mexico

SUNDRY NOTICE CONTINUED:

8. Set a 10 sack Class H cement plug at surface.
9. Install regulation abandonment marker.

Cement used on squeeze will be 15.6# cement.

NOTIFY OCD-HOBBS (505-393-6161) 24 HOURS PRIOR TO COMMENCING PLUGGING OPERATIONS

  
Rusty Klein  
Operations Technician  
June 17, 1999

SEE ATTACHED BEFORE AND AFTER DOWNHOLE DIAGRAMS