

Submit 3 Copies  
to Appropriate  
District Office

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-103  
Revised 1-1-89

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION  
P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

WELL API NO.
5. Indicate Type of Lease: STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B 9948
7. Lease Name or Unit Agreement Name SOLDIER HILL AE STATE
8. Well No. 1
9. Pool name or Wildcat Caprock Devonian East

SUNDY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"  
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
OIL WELL ☐ GAS WELL ☐ OTHER ☒ (SWD)

2. Name of Operator  
WAGNER & BROWN

3. Address of Operator  
P.O. BOX 1714, MIDLAND, TX 79702

4. Well Location:  
Unit Letter C : 800 Feet From The North Line and 1800 Feet From The West Line

Section 23 Township 12S Range 32E NMPM Lea County  
10. Elevation (Show whether DF, RKB, RT, GR, etc.)  
4336 GR

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data  
NOTICE OF INTENTION TO:


PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- 1) Set EZSV @ 9,000' and pump 1000' of Class "H" cement (114 sx yield 1.18)
- 2) Spot cement plugs as follows:  
@6400' w/ 25sx  
@5050' w/ 25sx  
@4350' 2/ 35sx
- 3) Perforate 3700' w/ 4JSPF
- 4) Set EZXV @ 3600' and squeeze perms @ 3,700' w/ 50sx.
- 5) Spot cement plug @ 1100' w/ 35sx.
- 6) Perforate 5-1/2" csg and 8-5/8" csg @ 400' and squeeze perms w/ 80sx.
- 7) Set 10sx plug at surface. Weld on plate.
- 8) Install dry hole marker.

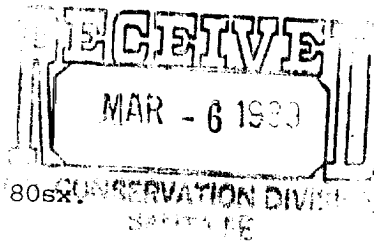

Plugging operations to begin upon approval from Oil Conservation Division.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Drew Diggs TITLE Petroleum Engineer DATE 3/3/89  
TYPE OR PRINT NAME Drew Diggs, P.E. TELEPHONE NO. (915) 686-5980

(This space for State Use)

ORIGINAL SIGNED BY JERRY SEXTON

APPROVED BY DISTRICT I SUPERVISOR TITLE  DATE MAR 9 1989

CONDITIONS OF APPROVAL, IF ANY:

TO BE APPROVED

18000000

MAR - 8 1989

OCD  
HOBBS OFFICE