

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

1111. 0175777

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. ☐ OIL WELL ☒ GAS WELL ☐ OTHER
SEP 7 11 14 AM '65

7. UNIT AGREEMENT NAME

2. NAME OF OPERATOR

Associated Oil & Gas Co.

8. FARM OR LEASE NAME

Federal-Trainer

3. ADDRESS OF OPERATOR

P.O. Box 66465 - Houston, Texas 77006

9. WELL NO.

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

330' SL & 660' WL of Sec. 7, 9S, 36E, Lea County, New Mexico

10. FUEL AND PUMP, OR WILDCAT

Wildcat

11. SURFACE, SUBSURFACE, AND
SOLVENT OR AERIAL

7, 9S, 36E

14. PERMIT NO.

15. ELEVATIONS (Show whether OF, AT, OR, etc.)

3997' AS

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☒

ALTERING CASING ☐

ABANDONMENT* ☐

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

11-3-64 Set cement retainer at 5070' cemented with 75 sk. cement and dropped bridging bar, tested plug to 2700 psi.

11-9-64 Perforated w/one 3/8" shot at the following intervals: 4992', 5002', 5007', 5015', 5026' and 5034'. Acidized with 2000 gallons MCA. Swabbed salt water.

1-26-65 Set retainer at 4972' and squeezed with 195 sk. cement. Perforated with one 3/8" shot at the following intervals: 4876', 4883', 4889', 4897', 4904', 4930', 4934', 4942' and 4947'.

18. I hereby certify that the foregoing is true and correct

SIGNED

Reece Blunderra

Petroleum Engineer


DATE 5/6/65

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

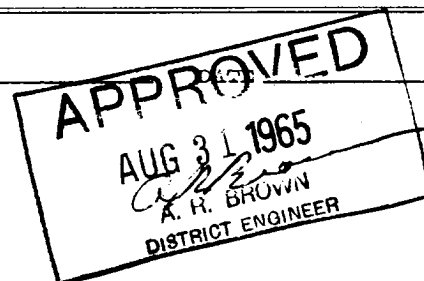

*See Instructions on Reverse Side