

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

JUN 25 1 24 PM '68

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease
State Fee

5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER-	7. Unit Agreement Name
2. Name of Operator SKELLY OIL COMPANY	8. Farm or Lease Name Vada Pruitt
3. Address of Operator P. O. Box 730 - Hobbs, New Mexico 88240	9. Well No. 1
4. Location of Well UNIT LETTER "M" 660 FEET FROM THE South LINE AND 660 FEET FROM THE West LINE, SECTION 15 TOWNSHIP 98 RANGE 34E NMPM.	10. Field and Pool, or Wildcat Undesignated
15. Elevation (Show whether DF, RT, GR, etc.) Unknown	12. County Lea

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

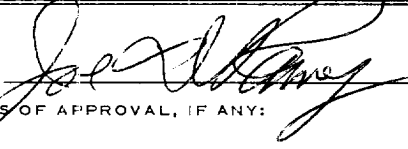
Spudded 17-1/2" hole 6-19-68. Drilled to 382'. Ran 13-3/8"OD casing and set at 381' as follows:
Top: 2 Jts. (87') 13-3/8"OD 61# SS N-80 "A" Condition.
Next: 1 Jt. (25') 13-3/8"OD 54.5# SS N-80 "A" Condition.
Next: 4 Jts. (135.52') 13-3/8"OD 48# SS H-40 "A" Condition.
Next: 1 Jt. (13.15') 13-3/8"OD 61# SS N-80 "A" Condition.
Bottom: 3 Jts. (110.40') 13-3/8"OD 35.62# SWSJ "B" Condition.
Total: 11 Jts. (371.07')

Cemented with 400 sacks Class "H" Cement with 2% Calcium Chloride. Cement circulated to surface. Plug down 6:20 P.M., 6-19-68.

Tested 13-3/8"OD casing to 800#, held OK. Drilled plug 6:30 P.M., 6-20-68.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED **(ORIGINAL SIGNED) V. E. Fletcher** TITLE **District Superintendent** DATE **June 24, 1968**

APPROVED BY  TITLE _____ DATE _____
 CONDITIONS OF APPROVAL, IF ANY: