

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Artco.
Lease No. LC-010336
Unit Federal-Midlin

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	☒	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

March 21, 1955

Well No. 1 is located 1900 ft. from N line and 1900 ft. from E line of sec. 22

S/2 & 1/4 of 1/4 Sec. 22
(1/4 Sec. and Sec. No.)

14S
(Twp.)

31E
(Range)

N.T.P.M.
(Meridian)

Brickley, Texas
(Field)

Chaves County
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is 4433 ft. This is estimated elevation, exact elevation to be furnished at a later date.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Casing Position:

275'-8 5/8" J-55 STC Casing, cement with 200 sx cement.
3100'-5 1/2" J-55 STC Casing, cement with 100 sx cement.

and Program:

Drill with water and native mud to approximately 3000'; displace mud with oil emulsion mud or crude oil and drill pay section to approximately 3150' T. Bottomed depth to the top of important markers:

Eastler, 1404'; Yates, 2320'; Owens, 3100'.

Drilling Plan:

Drill well with rotary to approximately 275' and set 8 5/8" casing.
Drill with rotary to TD of approximately 3150'. Run radioactivity logs. Set 5 1/2" casing at approximately 3100' in subdrift immediately above pay section and cement. Drill out cement and packoff shoe and complete in open hole. Run 2 3/8" tubing to 3100' and wash well in 2 3/8" pipe and not running unit for completion as pumping well.

Company Ad. Oil Company

Address Box 314, Midland, Texas

By C. L. Fly (C. L. Fly, Jr.)

Title Chief Clerk

WELL LOCATION SURVEY PLAT.

COMPANY


Ada Oil Co.

LEASE

~~Section 22, Twp. 14 S., Rge. 31 E., N.M.P.M.~~

WELL NO.

~~1~~ 1

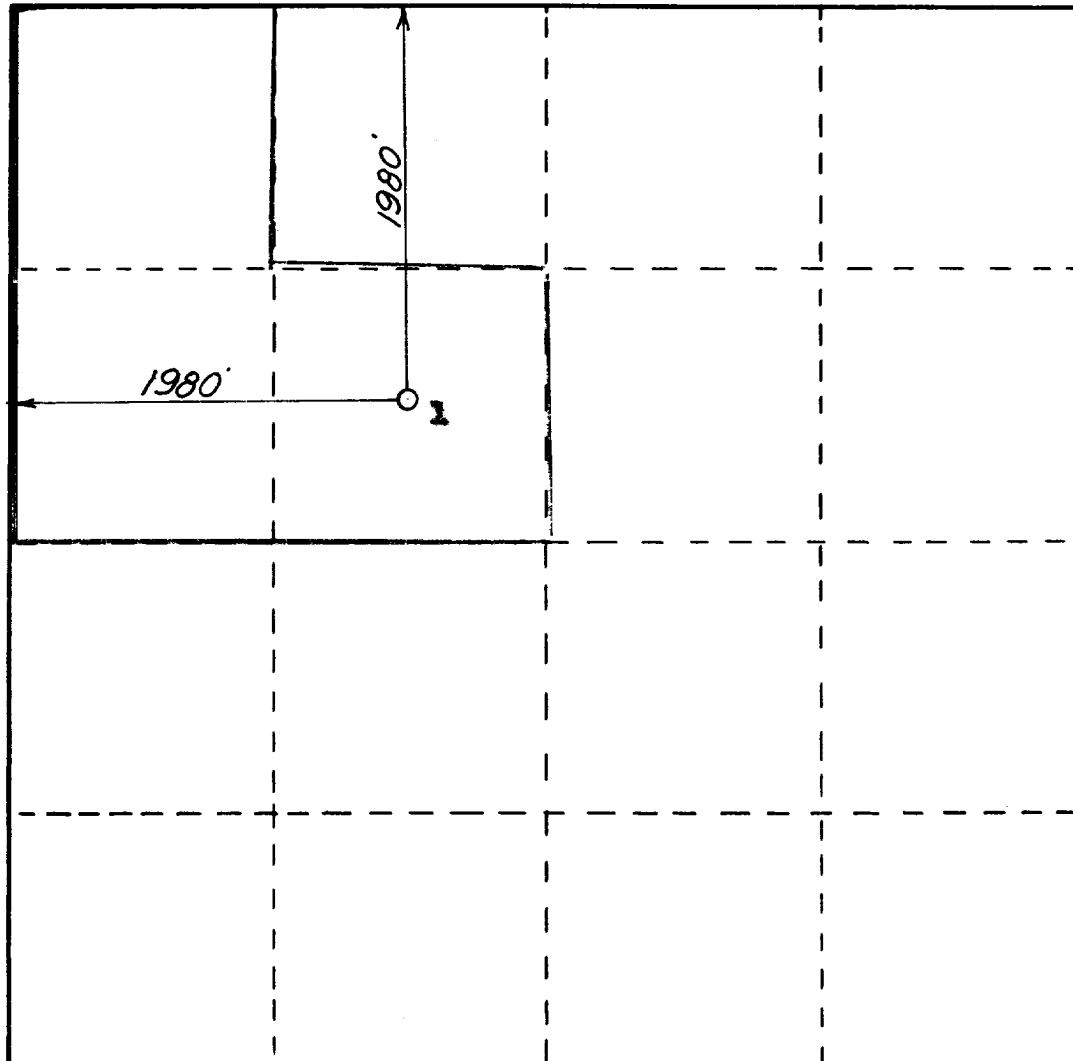

1/2 & 1/4 of SEC. 22 TWP. 14 S. RGE. 31 E. N.M.P.M.

I CERTIFY THAT THIS SURVEY WAS MADE UNDER
MY DIRECTION, AND THAT THE PLAT IS CORRECT
TO THE BEST OF MY KNOWLEDGE.

George H. Hirschfeld

NEW MEXICO LICENSE NO. 1528