


CONOCO INC.

Blow-out Preventer Specifications

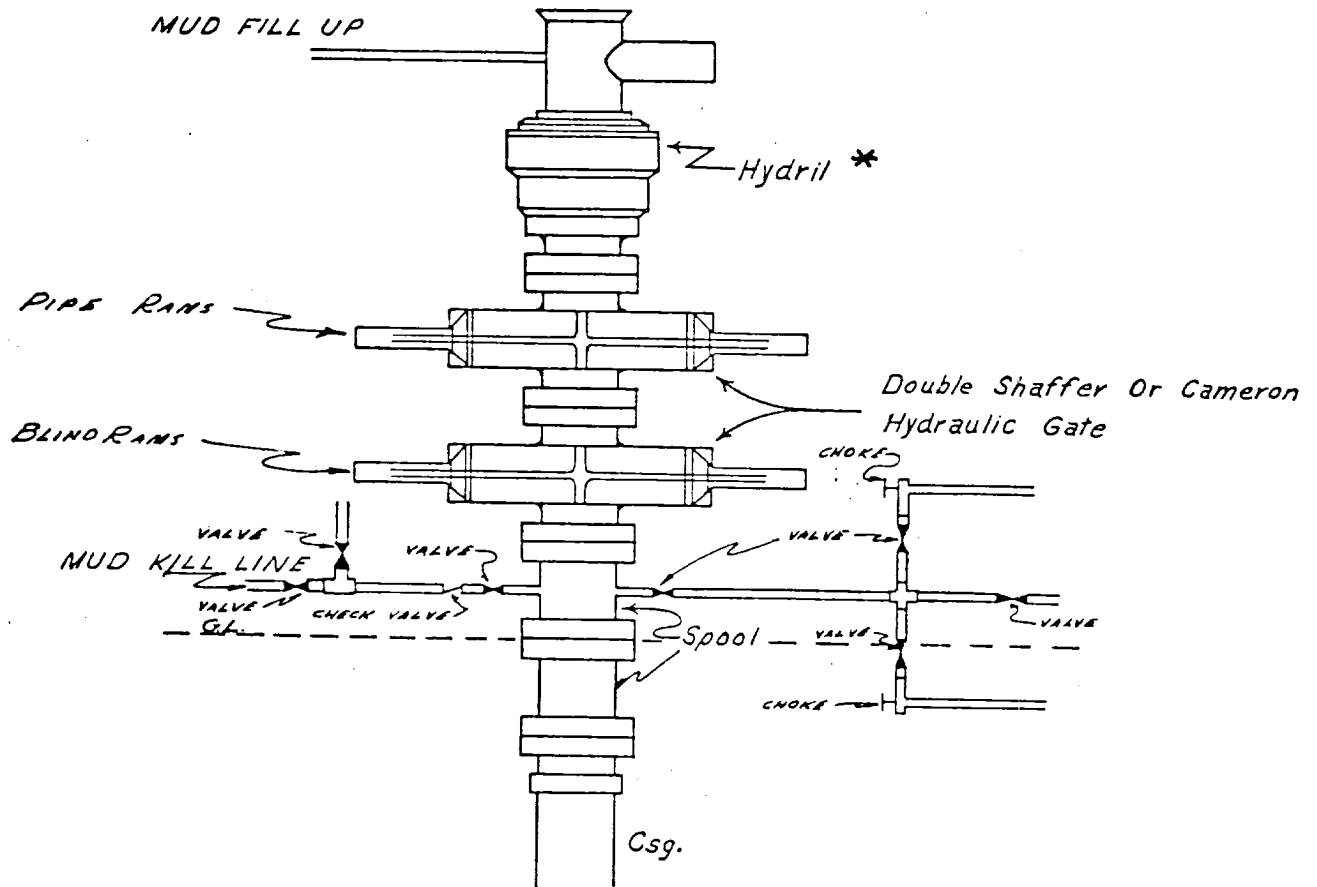

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.  
Remote controls on rig floor.

\*

DUE TO SUBSTRUCTURE CLEARANCE, HYDRIL  
MAY OR MAY NOT BE USED.

NOV 21 1987  
6-5-5  
MOBILE COUNTY

173