



SCHEDULE B MINIMUM BLOWOUT PREVENTER REQUIREMENTS

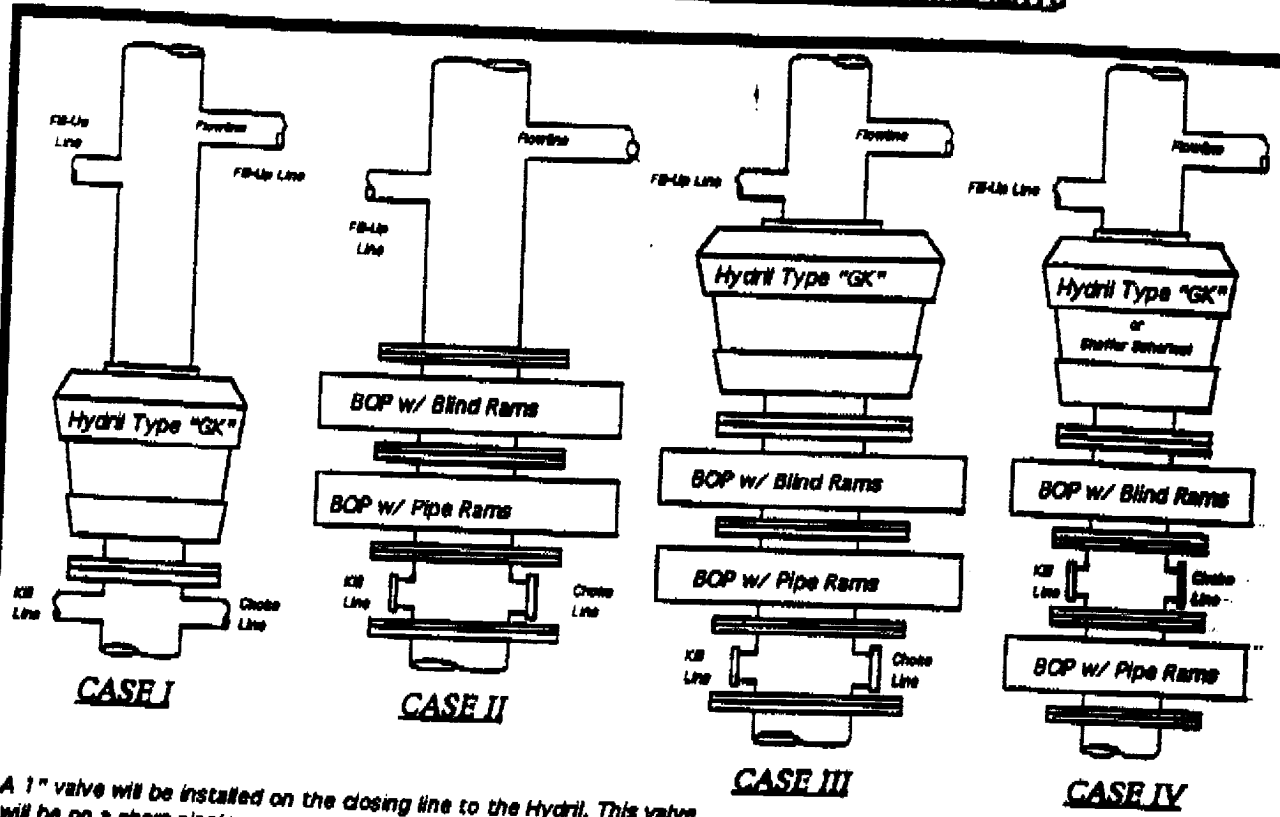

A 1" valve will be installed on the closing line to the Hydril. This valve will be on a short nipple next to the Hydril. The Hydril closing line must be equipped w/ a 1" - 3000 psi WP plug valve on the nipple into the Hydril.

CASE IV

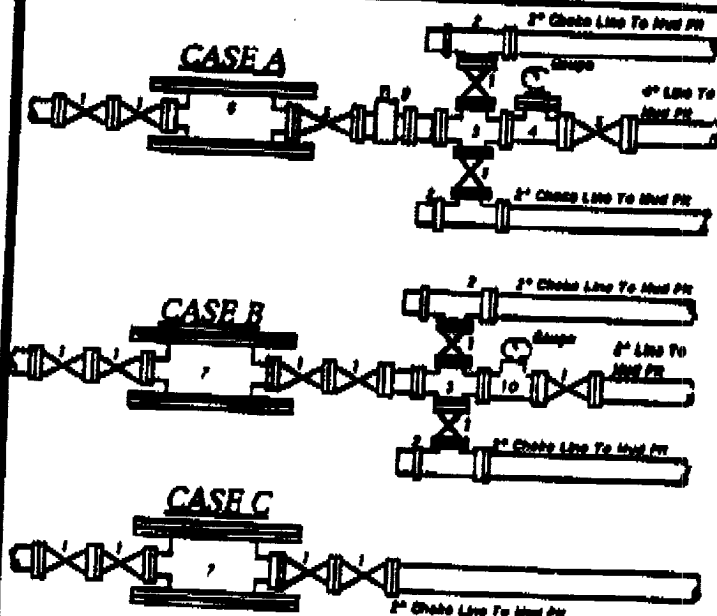

BOP SIZE	BOP CASE	WORKING PRESSURE	CLOSE CASE
11	II	3000 psi	B

Bradenhead furnished by Mobil will be:
Mfr: _____
Size: _____ Type: _____

Legend

1. 2" flanged oil steel valve must be either Cameron® or Halliburton Low Torque or Shell® Fl-Best.
2. 2" flanged adjustable choke, min. 1" full opening & centered w/ hard steel.
3. 4" x 2" flanged steel cross.
4. 4" flanged steel tee.
5. 4" flanged oil steel valve (Type as in no. 1).
6. Drilling Spool w/ 2" x 4" flanged outlet.
7. Drilling Spool w/ 2" x 2" flanged outlet.
8. 2" x 2" flanged steel cross.
9. 4" pressure equalized gate valve.
10. 4" flanged steel tee.

Notes

Choke assembly may be located in any convenient position. Use all steel fittings throughout. Make 80° turns with tool plugged back only. No field welding will be permitted on any of the components of the choke assembly and related equipment upstream of the choke. The choke must end all lines and fittings must be at least equivalent to the test pressure of the preventer's function. Independent closing control unit with clearly marked controls to be located on derrick floor near derrick's position.