


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

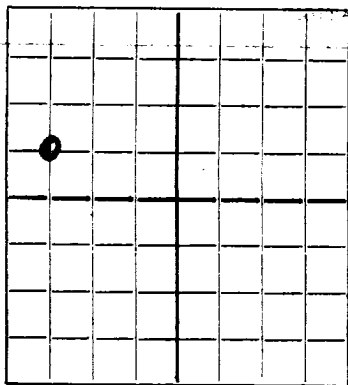

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico; or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Ohio Oil Company
Company or Operator

W. H. Laughlin
Lease

Well No. **1** in **SW 1/4 NW 1/4** of Sec. **9**, T. **20 S**

R. **37 E**, N. M. P. M., **Monument** Field, **Lea** County.

Well is **1980** feet south of the North line and **660** feet ~~XXX~~ **East West** of the **East** line of **Sec. 9**.

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is **W. H. Laughlin**, Address **Casa Grande, Arizona**

If Government land the permittee is _____, Address _____

The Lessee is _____, Address _____

Drilling commenced **January 6** 19 **37** Drilling was completed **February 24**, 19 **37**

Name of drilling contractor **Noble Drilling Company**, Address **Tulsa, Oklahoma**

Elevation above sea level at top of casing **3547** feet.

The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from **3852** to **3883** No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2"	40#			130	Reg			
9 5/8"	36#			1166	Float			
7"	24			3801	Float			
2 1/2"	6 1/2#			3857				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	12 1/2"	130	100	Halliburton	10	40
11	9 5/8"	1166	500	Halliburton	10	40
8 3/4"	7"	3801	400	Halliburton	10	40

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3883** feet, and from _____ feet to _____ feet

Cable toops were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **March 1, 1937**, 19 _____

The production of the first **24** hours was **110** barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Jack Clark, Driller **Bruce Harp**, Driller

R. C. Lindsay, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **26**

day of **Feb.**, 19 **37**

Stuvia Mahoney

Hobbs, New Mexico **Feb. 26/ 1937**

Name *Alvin P. ...*

Position **Sup't**

Representing **The Ohio Oil Company**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	75	75	Sand & Caliche
75	130	55	Red bed
130	408	278	Red bed & shells
408	560	152	Red bed & Shells
560	700	140	Red bed
700	1118	418	Red bed & Shells
1118	1225	107	Anhydrite
1225	1240	15	Broken salt & Anhy
1240	1435	195	Salt-anhy-streaks Potash
1435	1615	180	Salt-Anhy shells
1615	1800	185	Salt & Shells
1800	1825	25	Salt & Anhy
1825	1895	70	Salt & Shells
1895	1985	100	Salt
1995	2025	30	Salt & Anhy
2025	2140	115	Salt & Shells
2140	2310	170	Salt & Anhy
2310	2345	35	Anhy broken salt
2345	2407	62	Anhy
2407	2452	45	Anhy & Lime
2452	2508	56	Gyp & Anhy
2508	2580	72	Anhy & Lime
2580	2600	20	Lime-Anhy-Gyp
2600	2639	39	Lime-Anhy Gas 2624-2626
2639	2689	50	Lime
2689	2722	33	Lime-Anhy
2722	2766	44	Lime
2766	2792	26	Lime-Anhy
2792	2842	50	Lime
2842	2875	33	Lime-Anhy
2875	2955	80	Lime
2955	2990	35	Lime-Anhy
2990	3148	158	Lime gas 3115-3118
3148	3188	40	Gray lime
3188	3205	17	Broken Lime-gyp
3205	3286	81	Lime
3286	3310	24	Lime & Gyp streak
3310	3316	6	Gray Lime
3316	3322	6	Broken lime - gas
3322	3345	23	Broken lime
3345	3373	28	Lime
3373	3393	20	Broken lime
3393	3431	38	Lime
3431	3442	11	Gray Lime
3442	3684	242	Lime
3684	3695	11	Broken brown & gray lime
3695	3716	21	Lime
3716	3738	22	Broken Lime-brown & gray
3738	3752	14	Broken lime
3752	3765	13	Lime
3765	3782	17	Broken Lime
3782	3795	13	Gray Broken lime
3795	3810	15	Broken Lime
3810	3843	33	Broken Lime
3843	3852	9	Lime
3852	3883	29	Broken lime-oil odor