
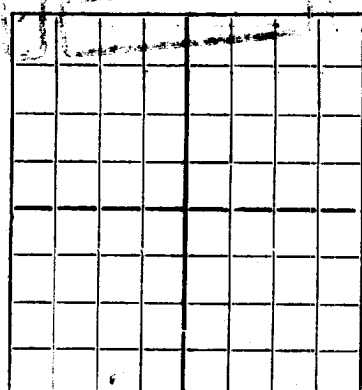


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

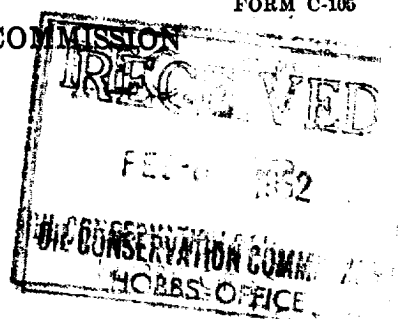

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

C. H. Sweet

Stanford-Trickey

Company or Operator Stanford-Trickey Lease  
Well No. 3 in Unit N of Sec. 7, T. 20S

R. 38E, N. M. P. M., Skaggs Field, Lea County.

Well is 330 feet North 330 of the North line and 1647.2 feet East 330 of the East line of

If State land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_

If patented land the owner is Valerie Schneider, Address Lubbock, Texas

If Government land the permittee is \_\_\_\_\_, Address \_\_\_\_\_

The Lessee is C. H. Sweet, Address Box 1115, Hobbs, New Mexico

Drilling commenced 1-11-52 19\_\_\_\_ Drilling was completed 1-31-52 19\_\_\_\_

Name of drilling contractor Teco Oil Company, Address Wichita Falls, Texas

Elevation above sea level at top of casing 3552 feet.

The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_

## OIL SANDS OR ZONES

No. 1, from 3800' to 3946' No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 80' to 120' feet. \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
<u>8 5/8"</u>	<u>20#</u>	<u>8</u>	<u>Used</u>	<u>253'</u>	<u>Tex. Pattern</u>			
<u>5 1/2"</u>	<u>15.5#</u>	<u>8</u>	<u>Used</u>	<u>3879'</u>	<u>Halliburton D. V. Tool @ 1497</u>			
					<u>Halliburton Float Collar &amp; Guide Shoe @ 3879'</u>			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>12"</u>	<u>8 5/8"</u>	<u>253'</u>	<u>150</u>	<u>Halliburton</u>		
<u>6 3/4"</u>	<u>5 1/2"</u>	<u>3879'</u>	<u>250</u>	<u>Halliburton</u>		

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_

Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		<u>15%</u>	<u>3000 Gal.</u>	<u>1-30-52</u>	<u>2900-3946</u>	

Results of shooting or chemical treatment After acid well swabbed and flowed at the rate of 4 bbls per hour. Out 3% Acid Water.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3946 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

## PRODUCTION

Put to producing 2-1-52 19\_\_\_\_

The production of the first 24 hours was 60 barrels of fluid of which 99 % was oil; 0 %

emulsion; 1 % water; and 0 % sediment. Gravity, Be 37

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

J. D. Smith Driller E. R. Greene Driller

Elmer Combs Driller \_\_\_\_\_ Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Hobbs, New Mexico February 7, 1952  
Date

Name [Signature]

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60	60	Surface -- Caliche
60	265	205	Shell, Sand & Red Bed
265	952	687	Red Bed
952	1172	220	Sand & Red Bed
1172	1246	74	Shell & Anhydrite
1246	1375	129	Anhydrite
1375	1525	150	Anhydrite
1525	2700	1175	Salt & Anhydrite
2700	3055	355	Anhydrite, Sand & Lime
3055	3509	454	Lime & Anhydrite
3509	3800	291	Lime
3800	3900	100	Lime Shale
3900	3946	46	Lime Total Depth 3946'

[illegible]