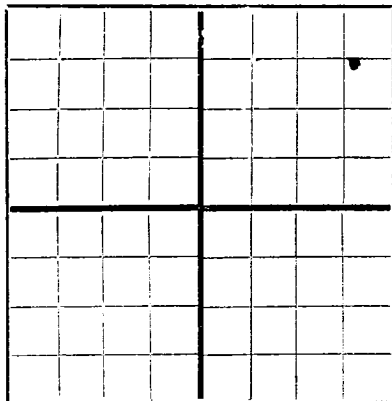


N

AREA 640 ACRES  
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

R. G. CLAY

Hobbs, New Mexico

Sinclair-State

Company or Operator

Well No.

368

NE 1/4

of Sec.

3

Address

238

Lease

Langlie-Mattix

Lea

R. 368, N. M. P. M.

Field,

County.

Well is 1660 feet south of the North line and

990

feet west of the East line of

Sec. 3

If State land the oil and gas lease is No.

B 1506

Assignment No.

If patented land the owner is.

Address.

If Government land the permittee is.

Address.

The Lessee is

R. G. CLAY

Hobbs, New Mexico

Drilling commenced

11/2

49

Drilling was completed

11/21

49

Name of drilling contractor

Clay &amp; Gaskie Contracting Co.

Address

Hobbs, New Mexico

Elevation above sea level at top of casing

feet.

The information given is to be kept confidential until

19.

## OIL SANDS OR ZONES

No. 1, from

3168

to

3325

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28	8	Matl.	1269	Guide				
5 1/2	14	8	Matl.	3045	Guide & Float				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

## PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters — Material

Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from

0

feet to

3325

feet, and from

feet to

feet

Cable tools were used from

feet to

feet, and from

feet to

feet

## PRODUCTION

Put to producing

12/20

49

The production of the first 24 hours was

barrels of fluid of which

% was oil; %

emulsion; % water; and

% sediment. Gravity, Be

If gas well, cu. ft. per 24 hours

Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Joe Spurgeon

Driller

O. E. Stewart

Driller

B. W. Jackson

Driller

Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

22

day of

Dec.

19

Notary Public

Hobbs, New Mexico

12/22/49

Place

Date

Name

Position

Partner

Representing

R. G. CLAY

Company or Operator

Address

Hobbs, New Mexico

My Commission expires

1-1-1953

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Surface & Caliche
20	220	200	Sand & Gravel
220	1230	1010	Red Bed
1230	1330	100	Anhydrite
1330	2830	1500	Salt
2830	2990	160	Anhydrite
2990	3140	150	Brown Limestone
3140	3168	-28	Anhydrite
3168	3325	157	Yellow Sand