


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## Notice of Intention to Drill



Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing changes must be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

June 12, 1940

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.  
Gentlemen:

Place

Date

You are hereby notified that it is our intention to commence the drilling of a well to be known as

SKELLY OIL COMPANY

H. O. Sims

Well No. 12 in CSW SE

of Sec. 33, T. 22, R. 37, N. M. P. M., Skelly Lease Field, Lea County

N.

The well is 660 feet (N.) ~~xx~~ of the South line and 1980 feet (W.) of the East line of Section 33 -

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_, Assignment No. \_\_\_\_\_

If patented land the owner is Hugh O. Sims


Address Eunice, New Mexico

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Skelly Oil Company

Address Tulsa, Oklahoma

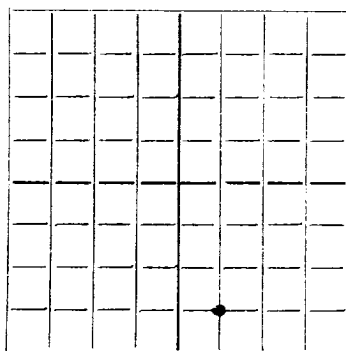

AREA 640 ACRES  
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows:

Cable tools fromtop to total depth - Contractor - Sahara Oil Co., Monahans, Texas..

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing OD	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
18"	16"	70#	SH	115'	Cemented	100
15 1/2"	13"	40#	SH	420'	Landed	
12 3/4"	10-3/4"	36#	SH	735'	Landed	
10 1/2"	8-5/8"	32#	SH	1100'	Landed	
8 1/2"	7"	20#	New	3420'	Cemented	250

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3460 feet.

Additional information: In cementing the 16" OD casing the cement will be circulated back to bottom of cellar. The 13", 10-3/4" and 8-5/8" OD casing will be pulled at the time the 7" casing is run & cemented.. In cementing the casing Halliburton Process will be used...

Approved \_\_\_\_\_, 19\_\_\_\_

except as follows:

Sincerely yours,

SKELLY OIL COMPANY

Company or Operator

By

Position District Superintendent

Send communication regarding well to

Name Skelly Oil Co.

Address Hobbs, New Mexico

OIL CONSERVATION COMMISSION

By

Roy Garbrough  
OIL & GAS INSPECTOR

Title

[illegible]

$\frac{d}{dt} \left( \frac{1}{\rho} \right) = - \frac{1}{\rho^2} \frac{d\rho}{dt}$

$\frac{1}{2} \left( \frac{1}{2} \right) = \frac{1}{4}$



1990-1991

1000 224 1000 1000