

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<b>X</b>	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

Monument, New Mexico

October 17, 1937

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the \_\_\_\_\_

**Amerada Petroleum Corporation** J. A. Stuart Well No. **1** in the  
Company or Operator Lease  
**NW 1/4 NW 1/4** of Sec. **14**, T. **25**, R. **37**, N. M. P. M.,  
**Langlie** Field, **Lea** County.

The dates of this work were as follows: \_\_\_\_\_

Notice of intention to do the work was [~~was not~~] submitted on Form C-102 on **October 14, 1937** and approval of the proposed plan was [~~was not~~] obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

**8-5/8" 32# 8-Tad. New Seamless casing was set in this well at 1007' and cemented by the Halliburton Method with 300sacks. Job completed 2:30 P.M. 10/13/37.**

The casing was allowed to stand undisturbed for 72 hours. The casing and connections were then tested with 1200# pump pressure and allowed to stand undisturbed for thirty minutes. No drop in pressure resulted so the cement was then drilled out of the casing and the same test of 1200# pump pressure was again applied and allowed to stand undisturbed for thirty minutes. No drop in pressure resulted so the drilling was then resumed.

Witnessed by **Cecil Provine** **Rowan Drilling Co** **Duplicate**  
Name Company Title

Subscribed and sworn to before me this \_\_\_\_\_


**17** day of **October**, 19**37**

**Lewis A. Maurer**  
Notary Public

My Commission expires **Dec. 21, 1940**

I hereby swear or affirm that the information given above is true and correct.

Name **J. C. Law**  
Position **Sup't**  
Representing **Amerada Petroleum Corporation**  
Company or Operator  
Address **Monument, New Mexico**

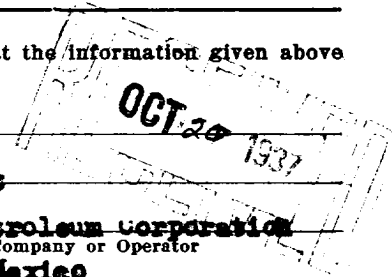

Remarks:

**Guy Shepard**  
Name  
**Oil & Gas Inspector**  
Title

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..