


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

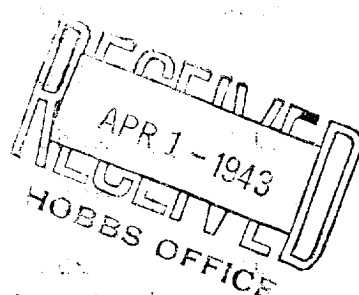

AREA 640 ACRES
LOCATE WELL CORRECTLY

Make Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

WESTERN GAS COMPANY

Drawer "H", Bennett, New Mex.

Wimberley Company or Operator

1

SEW

23

25

37

Lease

Well No.

in

of Sec.

T.

Langlie

Lea

R. 1980, N. M. P. M.,

1980

Field,

east

west

Sec. 23-25-37

County.

Well is feet south of the North line and feet west of the East line of

If State land the oil and gas lease is No.

S. D. Wimberley

Assignment No.

Delano, California

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

February 1

43

March 29

43

Drilling commenced

LEE DRILLING COMPANY

Drilling was completed

Tulsa, Oklahoma

19

Name of drilling contractor

3090

Address

Elevation above sea level at top of casing

feet

The information given is to be kept confidential until

19

Gas 3044

3220

OIL SANDS OR ZONES

No. 1, from

to

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

Production 3320

3325

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO		PURPOSE
13"	40	8	J&L	186					H ₂ O
9 5/8"	36	8	J&L	3431	Hall.		3044	3325	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17	13"	207	200	Hall.	10	15 tons
12 1/2	9 5/8"	3448	700	Hall.	11.4	

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3465 feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 2,500,000

Small Amt. H₂O

EMPLOYEES

Driller

Driller

R. C. Watson

Arvie Bryant

Ed Van Zandt

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30th

Place

Date

day of March, 1943

Jal, New Mexico

March 29, 1943

Position W. K. Davis

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	910	910	Gallena and Red Beds
910	1050	140	Anhydrite TA 910
1050	2210	1160	Salt and Anhydrite TX 1050
2210	2280	70	Anhydrite TL 2280
2280	2380	100	Anhydrite and Lime
2380	3125	845	Lime, Anhydrite and Sand and Shale TY 2380
3125	3350	225	Lime, sand and shale
3350	3465	125	Lime and shale