Case No.

1369

Large Exhibits

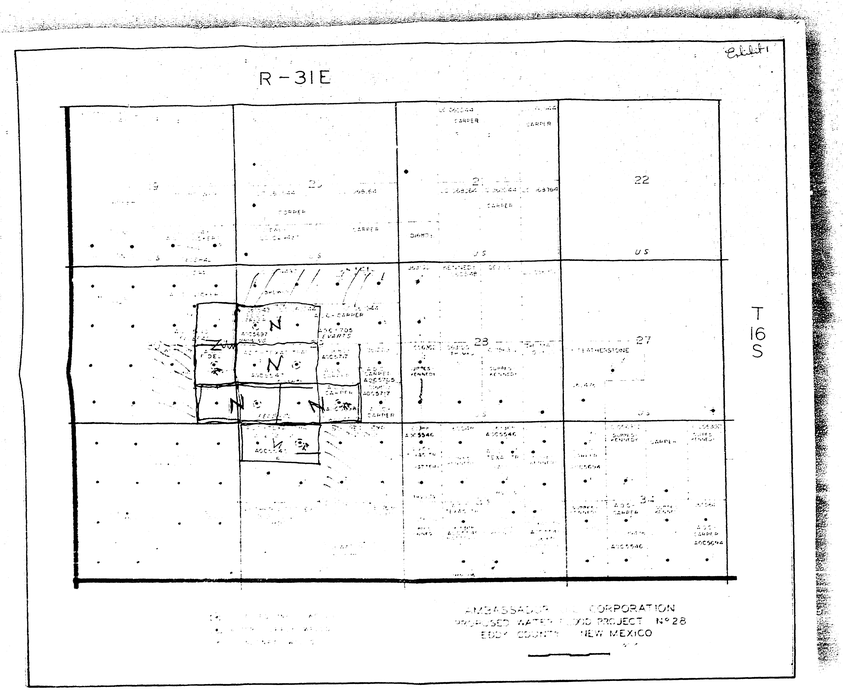

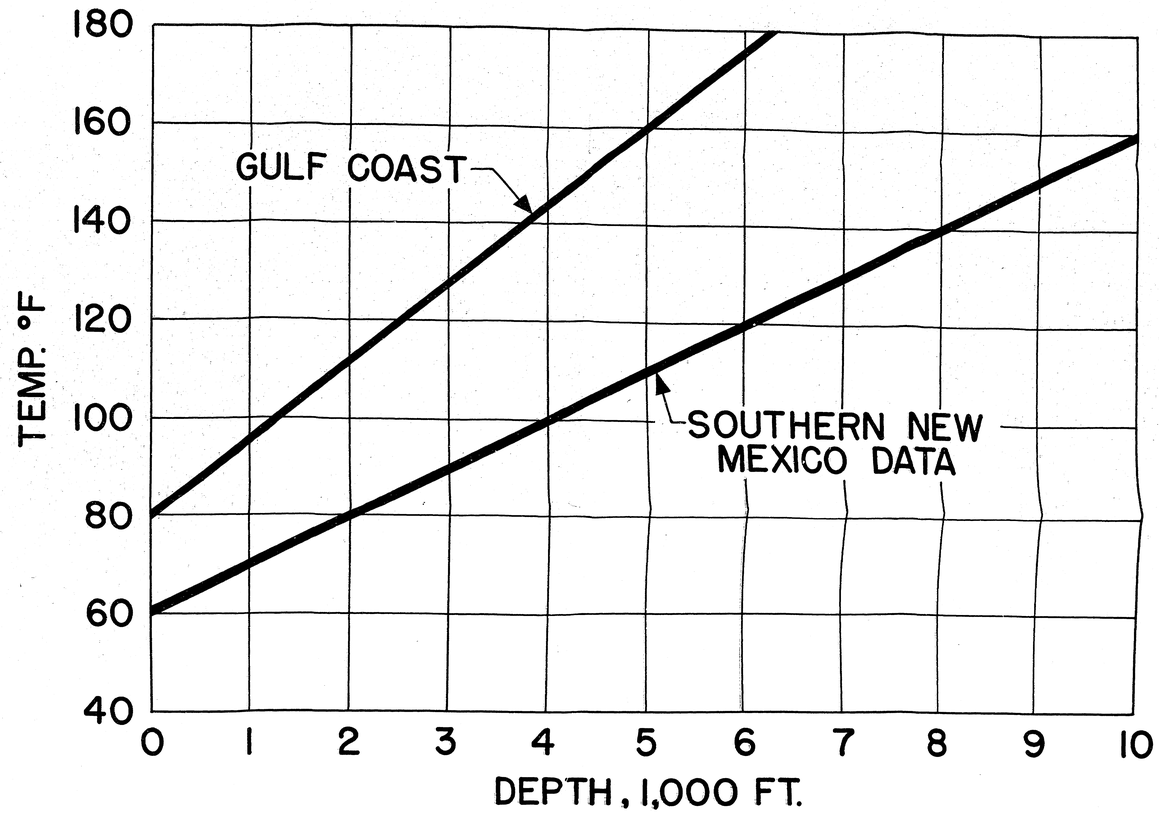

FIG. 1

STATIC SUBSURFACE TEMPERATURES

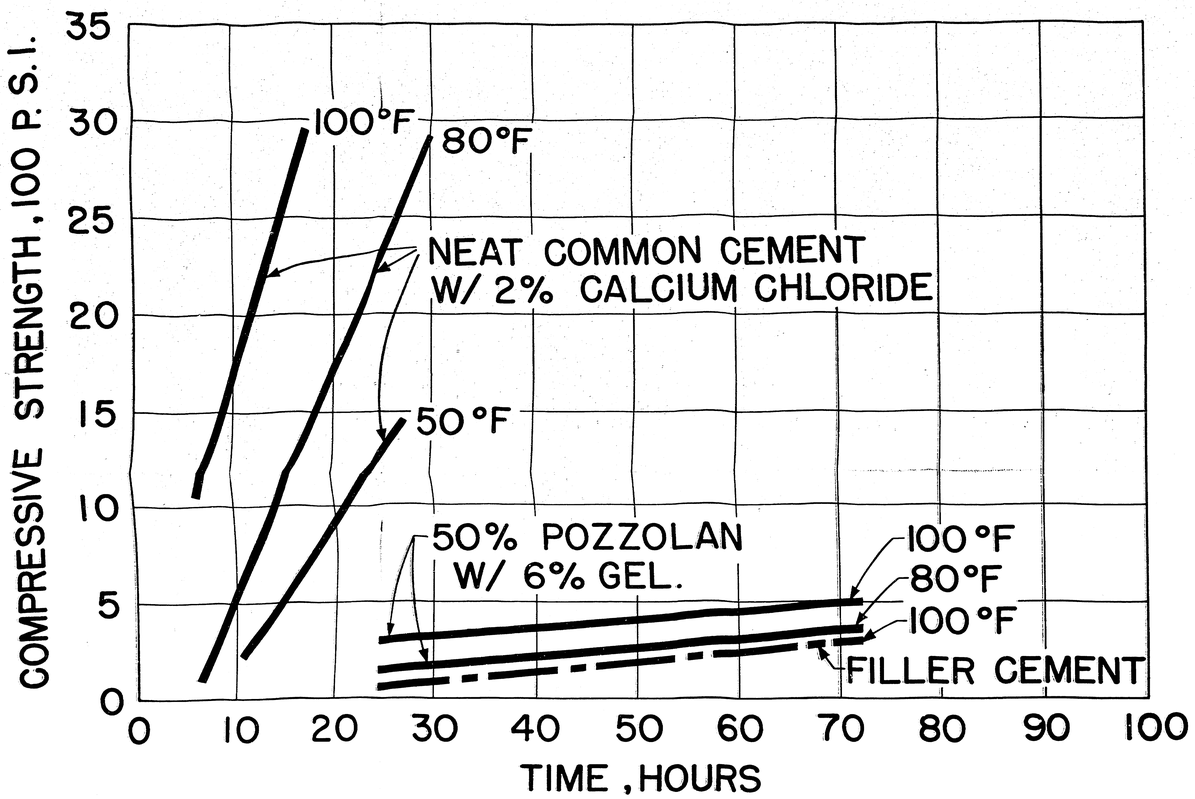

FIG. 3

STRENGTH OF VARIOUS CEMENTS

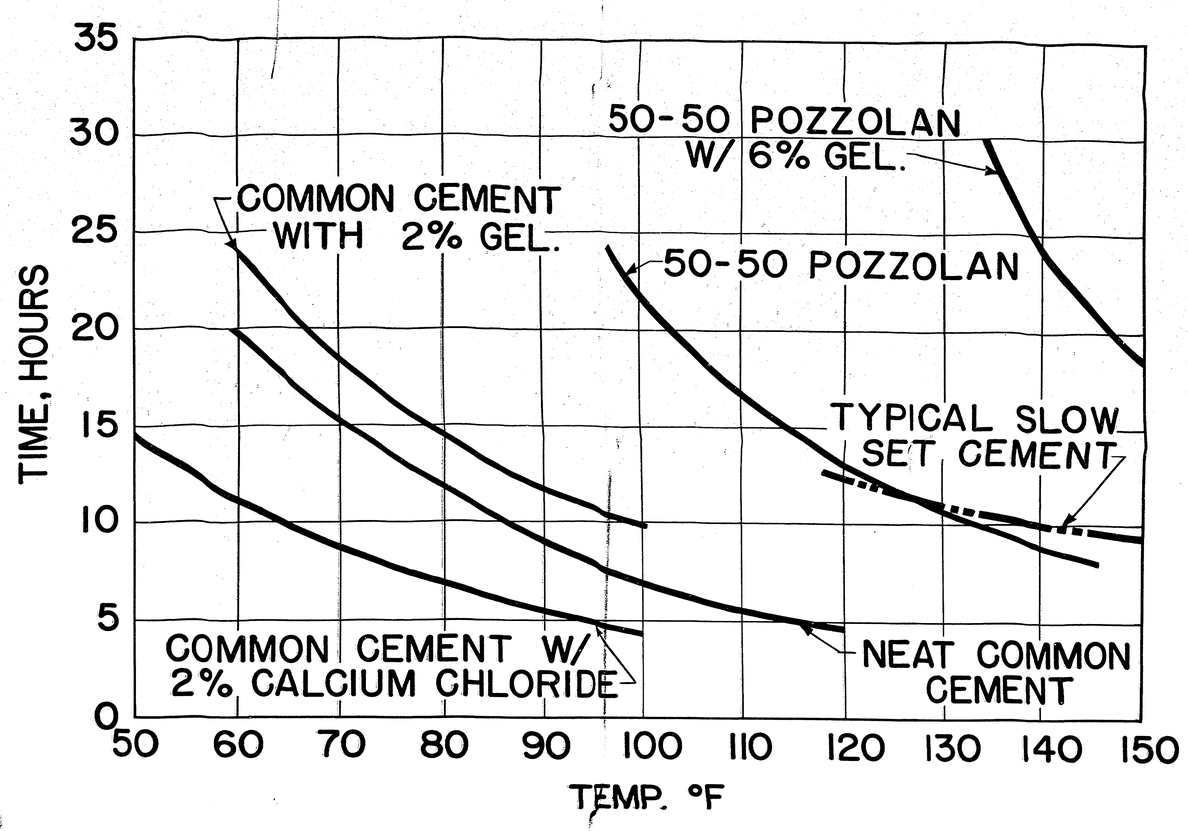

FIG. 2

TIME REQUIRED TO REACH 500 P.S.I. COMPRESSIVE STRENGTH

FIG. 4

STRENGTH OF EXAMPLE ACCELERATED CEMENTS *

* NOTE : 2% CALCIUM CHLORIDE USED WITH ALL CEMENTS TOGETHER WITH 5.2 GAL. WATER PER SACK. SLURRY DENSITY OF ALL CEMENTS = 15.6 #/ GAL.

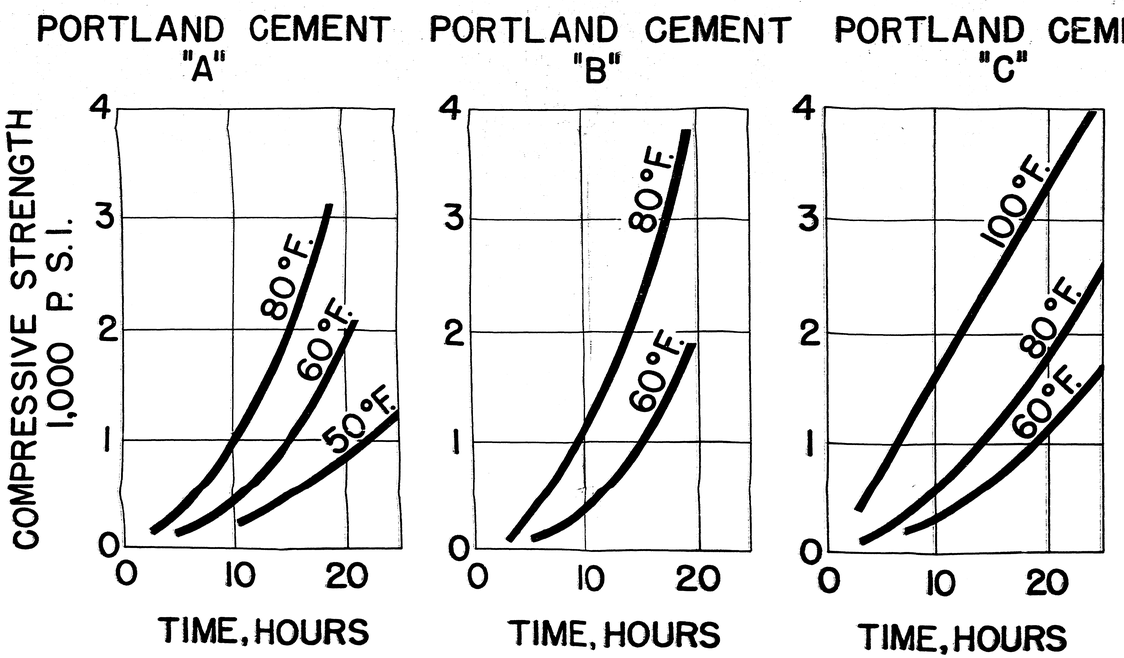

FIG. 5

CEMENT PUMPABILITIES ESTIMATED FOR NEW MEXICO

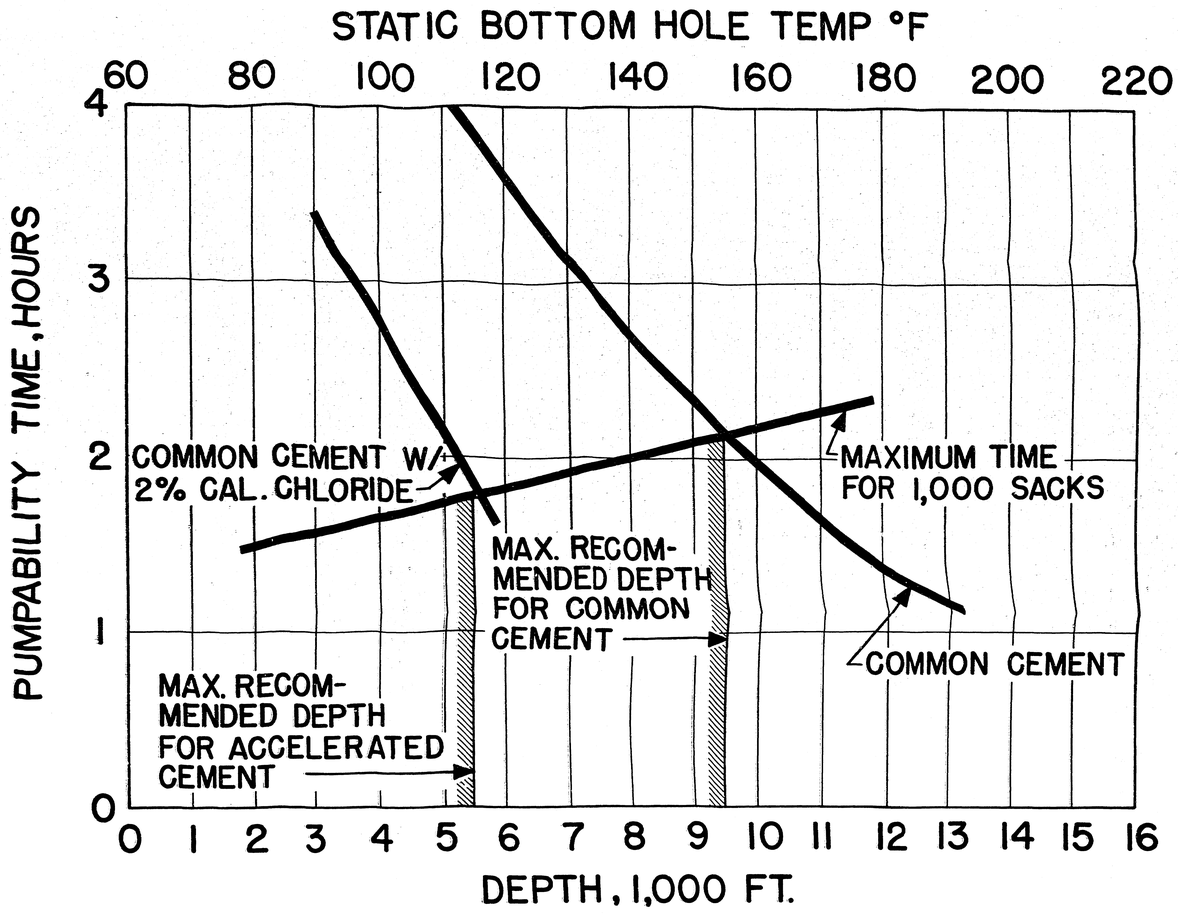

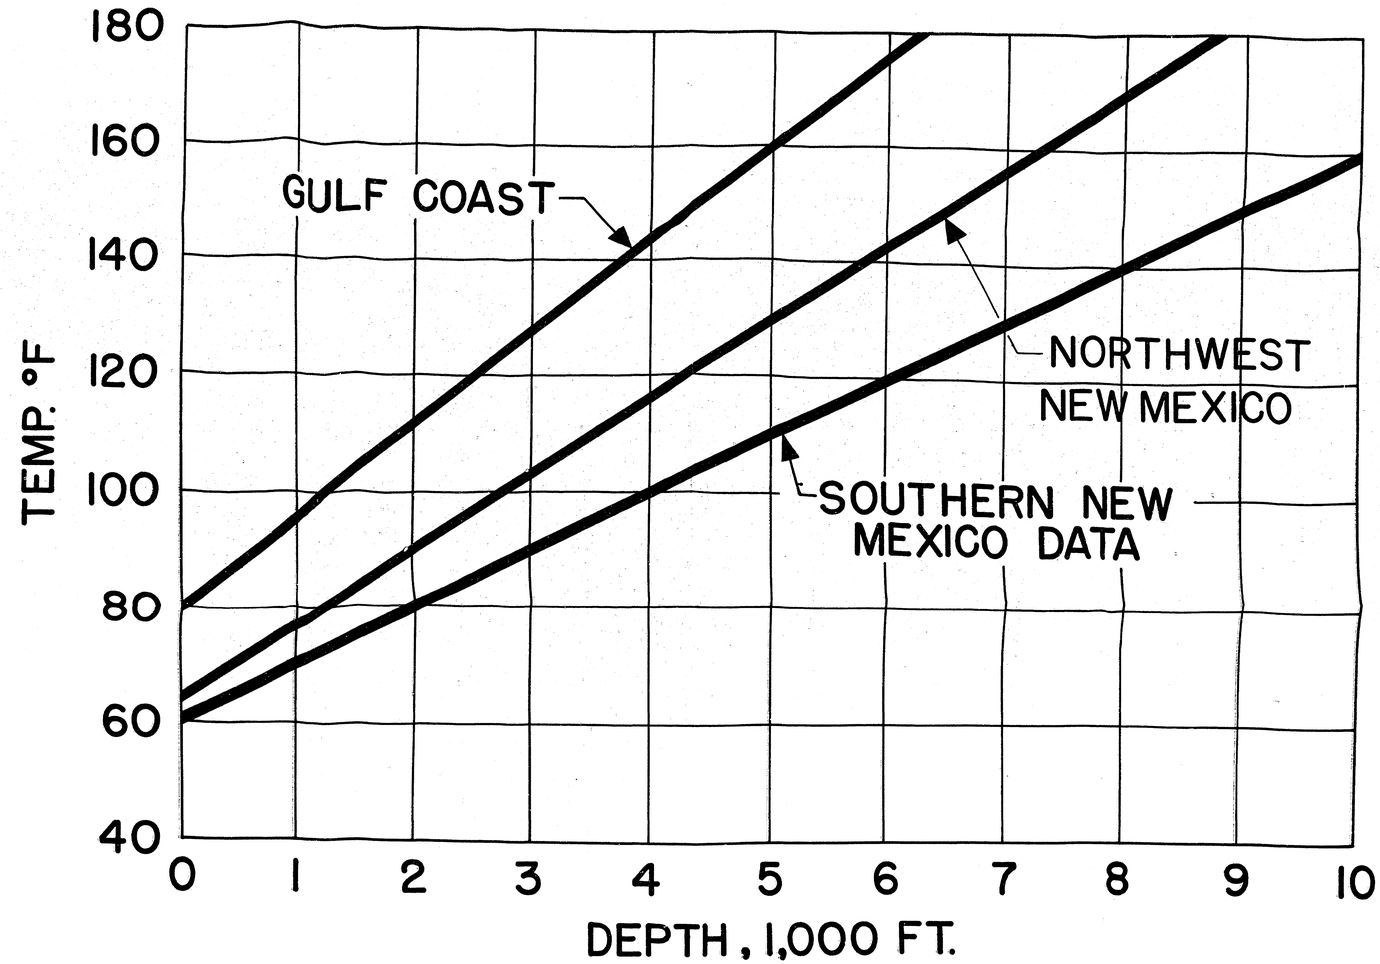

FIG. 6

STATIC SUBSURFACE
TEMPERATURES