District I 1625 N. French Dr., Hobbs, NM 88240 Phone;(575) 393-6161 Fax:(575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone;(575) 748-1283 Fax:(575) 748-9720

Phone:(3/3) /48-1283 Fax:(3/3) /48-9/20 District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr.

Santa Fe, NM 87505

Form C-101 August 1, 2011

Permit 163192

APPLICATION FOR PERMIT	TO DRILL, RE-ENTER,	, DEEPEN, PLUGBACK,	OR ADD A ZONE

1. Operator Name and Address APACHE CORP					2. OGRID N 873	umber
303 Veterans Airpark Lane Midland, TX 79705					3. API Number 30-025-41036	
4. Property Code 302708	NORTH	5. Property Nar I MONUMENT		50	6.	Well No. 384
	7	. Surface Loc	ation			

JL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
F	20	198	37E	F	2630	N	1330	W	LEA

V <u>16.</u>	8. Proposed Bottom Hole Location								
UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
F	20	19S	37E	F	2630	N	1330	W	Lea

9. Pool Information

EUNICE MONUMENT;GRAYBURG-SAN ANDRES	23000
-------------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Wett 7 OIL	Гуре	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3658
16. Multiple N	17. Propose 420		18. Formation San Andres	19. Contractor	20. Spud Date
Depth to Ground	water		Distance from nearest fresh water > 1000	r well	Distance to nearest surface water > 1000

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Type	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	11	8.625	24	1340	460	
Prod	7.875	5.5	17	4100	600	

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Hydril	3000	2000	

best of my knowledge and belief.	n given above is true and complete to the	OIL CONSERVATION DIVISION Approved By: Paul Kautz			
I further certify I have complied wi 19.15.14.9 (B) NMAC ⊠, if applica	th 19.15.14.9 (A) NMAC 🛮 and/or ible.				
Signature:					
Printed Name: Electronically fi	led by Bobby Smith	Title: Geologist			
Title:		Approved Date: 3/5/2013	Expiration Date: 3/5/2015		
Email Address: bobby.smith@	apachecorp.com				
Date: 2/28/2013	Phone: 432-818-1020	Conditions of Approval Attached			

DISTRICT I
1625 N. French Dr., Hobbs, NM 58240
Phone (675) 393-6161 Fax: (575) 393-0720
DISTRICT II
611 S. First St., Artesia, NM 88210
Phone (576) 748-1283 Fax: (676) 748-9720

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised August 1, 2011

Submit one copy to appropriate District Office

DISTRICT III 1000 Rlo Brazos Rd., Aztec, NM 87410 Phone (605) 334-6178 Fax: (605) 334-8170

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 67505 Phone (505) 476-3460 Fax: (505) 476-3462

API Number

N 597647.80 E 864911.30 (NAD-83)

OIL CONSERVATION DIVISION

Pool Code

1220 South St. Francis Dr. Santa Fe, New Mexico 87505

☐ AMENDED REPORT WELL LOCATION AND ACREAGE DEDICATION PLAT

Eunice Monument: Grayburg Sin andre

Certificate No. Gary L. Jones

BASIN SURVEYS


N 597683.92 E 870193.06 (NAD-83)

7977

27975

30-025-		230	1001 Code	Euni	ice/Monume	ent Grayle	ury San A	ndren
Property Code			•	Property Nam	ne /		Well Nu	ımber
302708				NMGS <u>AU</u>			38	
ogrid no. 893			APA	Operator Nam CHE CORPO			Elevat 3658	
				Surface Loca	ation		•	
UL or lot No. Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
F 20	19 S	37 E		2630	NORTH	1330	WEST	LEA
•		Bottom	Hole Loc	cation If Diffe	rent From Sur	face		
UL or lot No. Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres Joint	or Infill Co	nsolidation (Code Or	der No.	<u> </u>			
NO ALLOWABLE	WILL BE A:	SSIGNED '	ro this	COMPLETION U	UNTIL ALL INTER	RESTS HAVE BE	EEN CONSOLIDA	TED
	OR A I	ON-STAN	DARD UN	HAS BEEN	APPROVED BY T	THE DIVISION		
N 602921.89 E 864863.98 (NAD-83)	Lat - N Long - W NMSPCE- N (NAD- Lat - N Long - W NMSPCE- N	32'38'44.58" 03'16'38.53" 600239.354 825035.828	 			I hereby cer contained herei the best of my this organization interest or unter land including location on has this location pu owner of such, or to a voluntar compulsory pool the division. Signature ViCki hiou Emeil Addres SURVEYO I hereby certify on this plat we actual surveys supervison, an correct to the Date Surveye	OR CERTIFICAT rify that the inform is true and compl knowledge and belief n either owns a work ased mineral interest the proposed bottom h a right to drill this rsuant to a contract a mineral or working ry pooling agraement ing order heretofore OR CERTIFICAT I that the well locati as plotted from field made by me or d that the same is e best of my belief Surveyor Surveyor	action ete to and that ing in the sole well at with an therest, or a Date Date Date TON on shown notes of under my true and

SECTION 20, TOWNSHIP 19 SOUTH, RANGE 37 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO.

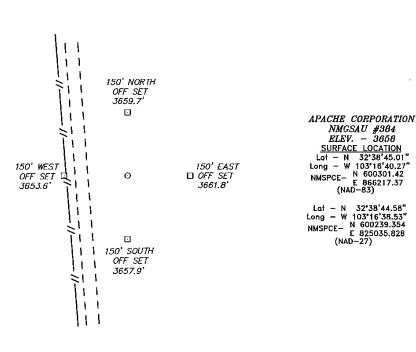

DRIVING DIRECTIONS

FROM 62-180 AND MADDOX ROAD GO SOUTH 3.8 MILES TURN EAST GO 1.3 MILES TURN NORTH GO 0.2 MILES TO PROPOSED LOCATION.

200 200 400 FEET n SCALE: 1" = 200'

APACHE CORPORATION

NMGSAU #384 / WELL PAD TOPO REF:

THE NMGSAU #384 LOCATED 2630'

FROM THE NORTH LINE AND 1330' FROM THE WEST LINE OF SECTION 20, TOWNSHIP 19 SOUTH, RANGE 37 EAST,

N.M.P.M., LEA COUNTY, NEW MEXICO.

Sheets Survey Date: 01-31-2013

BASIN SURVEYS P.O. BOX 1786 - HOBBS, NEW MEXICO

D. JONES W.O. Number: 27975 Drawn By:

02-05-20113 Disk: DAJ

Date:

27975

Permit Comments

Operator: APACHE CORP , 873
Well: NORTH MONUMENT G/SA UNIT #384

API: 30-025-41036

Created By	Comment	Comment Date
pkautz	Land s/S	2/28/2013
CHERRERA	OCD RECEIVED FORM C144 CLEZ. OCD PERMIT # P1-05838	3/5/2013

Permit Conditions of Approval Operator: APACHE CORP , 873 Well: NORTH MONUMENT G/SA UNIT #384 API: 30-025-41036

OCD Reviewer	Condition
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	In order to seal off protectable water, surface casing must be set 25' below top of Rustler Anhydrite