District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.
For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:
- ☐ Below grade tank registration
- ☐ Permit of a pit or proposed alternative method
- ☒ Closure of a pit, below-grade tank, or proposed alternative method
- ☐ Modification to an existing permit/or registration
- ☐ Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: **WHITING OIL & GAS CORPORATION OGRID #: 25078**
Address: **400 W ILLINOIS STE 1300 MIDLAND, TEXAS 79701**
Facility or well name: **DOROTEO 1927 15 WELL # 3**
API Number: **30-021-20681** OCD Permit Number: 194743
U/L or Qtr/Qtr J Section 15 Township 19N Range 27E County: HARDING COUNTY
Center of Proposed Design: Latitude 35.8730566 Longitude -104.0533611 NAD: ☒ 1927 ☐ 1983
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Pit:** Subsection F, G or J of 19.15.17.11 NMAC
Temporary: ☐ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chloride Drilling Fluid ☐ yes ☐ no
☐ Lined ☐ Unlined Liner type: Thickness _____mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____ Volume: _____bbl Dimensions: L_____ x W_____ x D_____

3.
☐ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC
Volume: _____bbl Type of fluid: _____
Tank Construction material: _____
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other _____
Liner type: Thickness _____mil ☐ HDPE ☐ PVC ☐ Other _____

4.
☐ **Alternative Method:**
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

5.
Fencing: Subsection D of 19.15.17.11 NMAC *(Applies to permanent pits, temporary pits, and below-grade tanks)*
☐ Chain link, six feet in height, two strands of barbed wire at top *(Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)*
☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
☐ Alternate. Please specify_____

6.

Netting: Subsection E of 19.15.17.11 NMAC *(Applies to permanent pits and permanent open top tanks)*

☐ Screen ☐ Netting ☐ Other_____

☐ Monthly inspections (If netting or screening is not physically feasible)

7.

Signs: Subsection C of 19.15.17.11 NMAC

☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

☐ Signed in compliance with 19.15.16.8 NMAC

8.

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

☐ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.

☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

9.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. **Siting criteria does not apply to drying pads or above-grade tanks.**

General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - ☐ NM Office of the State Engineer - iWATERS database search; ☐ USGS; ☐ Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit . NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. **(Does not apply to below grade tanks)** - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. **(Does not apply to below grade tanks)** - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. **(Does not apply to below grade tanks)** - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. **(Does not apply to below grade tanks)** - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

10.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

11.

Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ A List of wells with approved application for permit to drill associated with the pit.
☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12.

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Climatological Factors Assessment
- ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Quality Control/Quality Assurance Construction and Installation Plan
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Nuisance or Hazardous Odors, including H_2S, Prevention Plan
- ☐ Emergency Response Plan
- ☐ Oil Field Waste Stream Characterization
- ☐ Monitoring and Inspection Plan
- ☐ Erosion Control Plan
- ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

13.

Proposed Closure: 19.15.17.13 NMAC

Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☐ Below-grade Tank ☐ Multi-well Fluid Management Pit ☐ Alternative

Proposed Closure Method:
- ☐ Waste Excavation and Removal
- ☐ Waste Removal (Closed-loop systems only)
- ☐ On-site Closure Method (Only for temporary pits and closed-loop systems)
  - ☐ In-place Burial ☐ On-site Trench Burial
- ☐ Alternative Closure Method

14.

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) ***Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.***

- ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC
- ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

15.

Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC

Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. - FEMA map	☐ Yes ☐ No

16.
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) ***Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.***

- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC
- ☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC
- ☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
- ☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

17.
Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____

18.
OCD Approval: ☐ Permit Application (including closure plan) ☒ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature: _____ **Approval Date:** 7/29/2015

Title: ENGINEER **OCD Permit Number:** _____

19.
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☒ **Closure Completion Date: 06/29/2015**

20.
Closure Method:

☐ Waste Excavation and Removal ☒ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

21.
Closure Report Attachment Checklist: ***Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.***

- ☒ Proof of Closure Notice (surface owner and division)
- ☒ Proof of Deed Notice (required for on-site closure for private land only)
- ☒ Plot Plan (for on-site closures and temporary pits)
- ☒ Confirmation Sampling Analytical Results (if applicable)
- ☒ Waste Material Sampling Analytical Results (required for on-site closure)
- ☐ Disposal Facility Name and Permit Number
- ☒ Soil Backfilling and Cover Installation
- ☒ Re-vegetation Application Rates and Seeding Technique
- ☒ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude 35.8730566 Longitude -104.0533611 NAD: ☒ 1927 ☐ 1983

22.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): KAY MADDOX Title: REGULATORY SUPERVISOR

Signature: Kay Maddox Date: 07/27/2015

e-mail address: KAY.MADDOX@WHITING.COM Telephone: 432.686.6709

WHITING OIL AND GAS CORPORATION
PIT CLOSURE REPORT

DOROTEO 1927 15 Well # 3
API NO 30-021-20681

1) The pit will be closed within six (6) months from the date that the drilling or workover rig is released. If necessary, the division district office may grant an extension not to exceed three (3) months.
   The Drlg rig was released 1/12/2015 after drilling this well
2) Surface Owners will be notified by Certified mail at least 72 hours but not more than one week prior to closure of the Temporary pit. The notice shall include well name, API number and location.
   Reference attached notification
3) The Appropriate Division District Office (OCD) will be notified verbally and in writing at least 72 hours but not more than one week prior to closure of the Temporary pit. The notice shall include well name, API number and location.
   NMOCD was notified via email – reference attached copy of email
4) If on site burial is on PRIVATE LAND, Whiting will file a deed notice identifying the exact location of the onsite burial with the county clerk in county where onsite burial occurs
   Certified Recorded Deed Notice attached
5) All liquids from the pit will be removed prior to closure. Liquids will be disposed of at the Sundance Services, Inc. Parabo Disposal Facility (Permit No. 010003), unless they are recycled, reused, or reclaimed in a division district office-approved manner.
   Liquids from pit evaporated, no removal was required.
6) The pit will be stabilized with clean non-waste containing earthen material with a ratio no more then 3:1
   Pit was stabilized with non-waste containing earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and Mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.
7) After stabilization, the contents of the pit will be tested to determine whether concentrations are below standards. A five-point composite sample will be collected. The samples will be sent to an approved laboratory and analyzed for benzene, total BTEX, TPH, the GRO and DRO combined fraction, and chlorides. Assuming water could be encountered around 100', the following should not be exceeded:

- Chlorides (ads determined by EPA method 300.1): 40,000 mg/kg or background concentration, whichever is greater
- TPH (EPA SW-846 method 418.a or other division-approved EPA method): 2500 mg/kg.
- GRO and DRO combined fraction (EPA SW-846 method 8015M): 1000 mg/kg.
- BTEX (EPA SW-846 method 8021B or 8260B or other approved EPA method): 50 mg/kg
  - Benzene (EPA SW-846 method 8021B or 8260B or other approved EPA method): 10 mg/kg

A five point composite sample was taken of the pit using sample tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b) results attached.

8) If the contents are above the concentration limits after stabilization Whiting will comply with 19.15.17.13.C (Waste Excavation and Removal)
Not necessary

9) If it is determined that contents of the pit doesn't exceed the above-specified concentrations, the pit will be covered with compacted, non-waste-containing, earthen material. A division-prescribed soil cover will be constructed and the site will be re-contoured and re-vegetated, per Subsections D, E, F, G, H, of 19.15.17.13 NMAC
The pit material passed solidification and testing standards. The pit area was then back filled with compacted, non-waste containing earthen material.

10) All areas associated with the pit that are no longer being used will be substantially restored to the condition that existed prior to oil and gas operations by placement of the soil cover re-contouring to match original contours and surrounding topography, and re-vegetating.
This was done – please see attached pictures

11) If an alternative to the re-vegetation requirements is required to prevent erosion, protect fresh water, or protect human health and the environment, this alternative will be proposed to the surface owner. The proposed alternative, with written documentation demonstrating that the surface owner approves the alternative, will be submitted to the division for approval.
No alternative is required

12) Soil cover will consist of 4' of non-waste containing earthen material with chloride concentrations less than 600mg/KG including 1' of topsoil
Four feet of non-waste earthen cover was achieved including one foot of suitable material to establish vegetation.

13) All contents, including synthetic pit liners, will be buried in place. By folding outer edges of the pit liner to overlap waste material, and then installing a geomembrane liner cover that is 20 mil string reinforced LLDPE, synthetic material, impervious, resistant to ultra violet light, petroleum hydrocarbons, salts, acid and alkaline.
These was done including placing a 20 mil LLDPE liner cover

14) Soil cover will be constructed to the site's existing grade and will prevent ponding of water and erosion of the cover material.
This was done – reference attached photos

15) The first favorable growing season following pit closure, all disturbed areas associated with the pit and no longer being used will be seeded or planted.
This area will be re-seeded during the next growing season in this area – reference attached letter

16) Seeding will be accomplished by drilling on the contour whenever practical, or by other division-approved methods. Vegetative cover will be considered complete when there is a life form ratio of +/- 50% of pre-disturbance levels with at least 70% total plant cover of pre-disturbance level (Excluding Noxious Weeds) OR in accordance to 19.15.17.13.H.5.d
This will be done during the next growing season in this area

17) Seeding or planting will be repeated until the required vegetative cover is successfully achieved.
Whiting will comply

18) When conditions aren't favorable for the establishment of vegetation (such as during periods of drought), the division will be contacted for approval to delay seeding or planting, or forapproval to use additional cultural techniques such as mulching, fertilizing, irrigating, fencing, etc.
Attached letter

19) The division will be notified when seeding or planting is completed, and when successful re-vegetation has been achieved.
Whiting will comply

20) Place a steel marker at the center of the onsite burial. The marker shall be 4" diameter, at least 4' high and cemented 3' deep. The following will be welded, stamped or otherwise permanently engraved into the marker; operator name, lease name, well number and location, unit letter, section, township, range, and that the marker designates an onsite burial
Reference attached pictures

21) Within 60 days of closure, completion, a closure report will be submitted on form C-144, with necessary attachments, to document closure activities, including sampling results, a plot plan, and backfilling details. In this closure report, Whiting will certify that all information in the report and attachments is correct and that Whiting has complied with all applicable closure requirements and conditions specified in the approved Closure Plan. A plat of the temporary pit location will be provided on form C-105.

Kay Maddox

From: Kay Maddox
Sent: Thursday, June 25, 2015 10:50 AM
To: Lowe, Leonard, EMNRD (Leonard.Lowe@state.nm.us)
Cc: Jones, William V, EMNRD (WilliamV.Jones@state.nm.us)
Subject: Notification of Pit closures

Notification of proposed On Site Pit closures -

Closing June 29th, 2015
Well: Candelario 1928 10 Well # 1
Section 10, T19N, R28E, Unit Lttr J
1660 FSL & 1660 FEL
30-021-20659
Harding County, NM

Closing June 30th, 2015
Well: Doroteo 1927 15 Well # 3
Section 15, T19N, R27E, Unit Lttr J
1650 FSL & 1650 FEL
30-021-20681
Harding County, NM

Kay Maddox
Regulatory Supervisor
Whiting Petroleum Corporation
and its wholly owned subsidiary
Whiting Oil and Gas Corporation
400 West Illinois Avenue, Suite 1300
Midland, TX 79701
Direct (432) 686-6709
Cell (432) 638-8475
kay.maddox@whiting.com
www.whiting.com

June 25, 2015

Dennis Martinez Attorney in Fact For:
Doroteo Martinez
247 Cemetery Road
Roy, New Mexico 87743

RE: Notification to Surface Owner of On-Site Drilling Pit Closure

Well: Doroteo 1927 15 Well # 3
Section 15, T19N, R27E, Unit Lttr J
1650 FSL & 1650 FEL
30-021-20681
Harding County, NM

Whiting Oil & Gas proposes to close and remediate the surface land according to all rules and regulations noted in Subsection E of 19.15.17.13 NMAC beginning June 29th, 2015.

If you have any additional question please contact Kay Maddox @ 432.686.6709.

Sincerely,

Kay Maddox
Regulatory Supervisor

Mailed by certified mail to above listed party on this the 25th day of June, 2015

Signed: Kay Maddox- Regulatory Supervisor

7011 3500 0002 4991 1946
Certified Mail Number

Whiting Petroleum Corporation
and its wholly owned subsidiary
Whiting Oil and Gas Corporation
400 W. Illinois Avenue, Suite 1300, Midland, TX 79701 Office: 432.686.6700 Fax 432.686.6799

STATE OF NEW MEXICO

COUNTY OF HARDING

NOTICE OF PIT CLOSURE

In accordance with Section 19.15.17.13.E.4 of the NMOCD , the operator hereby provides notice of an on-site burial of a temporary Oil & Gas drilling pit. All rules and regulations of Rule 19.15.17 have been adhered to.

Lease name:	DOROTEO 1927 15
Well No:	3
API No:	30-021-20681
TWN & RGE:	TWN 19N RGE 27E Section 15
Unit Letter:	J
Footages:	1650' FSL & 1650' FEL
Date of Closure:	06/29/2015

IN WITNESS WHEREOF, the recordation notice of Pit Closure/burial has been executed on the date indicated below by undersigned.

Whiting Petroleum Corporation
And its wholly owned subsidiary
Whiting Oil & Gas Corporation

Kay Maddox

Kay Maddox – Regulatory Supervisor

HARDING COUNTY, NM
DOCUMENT# 20150079
07/14/15 12:11:28 PM
1 of 1
BY Barbara Shaw

STATE OF TEXAS
COUNTY OF MIDLAND

This instrument was acknowledged before me this 10TH day of JULY, 2015, by

Kay Maddox on behalf of Whiting Oil & Gas Corporation.

Ella Denice Scurlark

Notary Public

ELLA DENICE SCURLARK
Notary Public, State of Texas
My Commission Expires
September 15, 2015

Pit Plot

Whiting Petroleum Corporation

Doroteo 1927-15 #3

T-19-N, R-27-E, Section 15, NMPM

Harding County, New Mexico

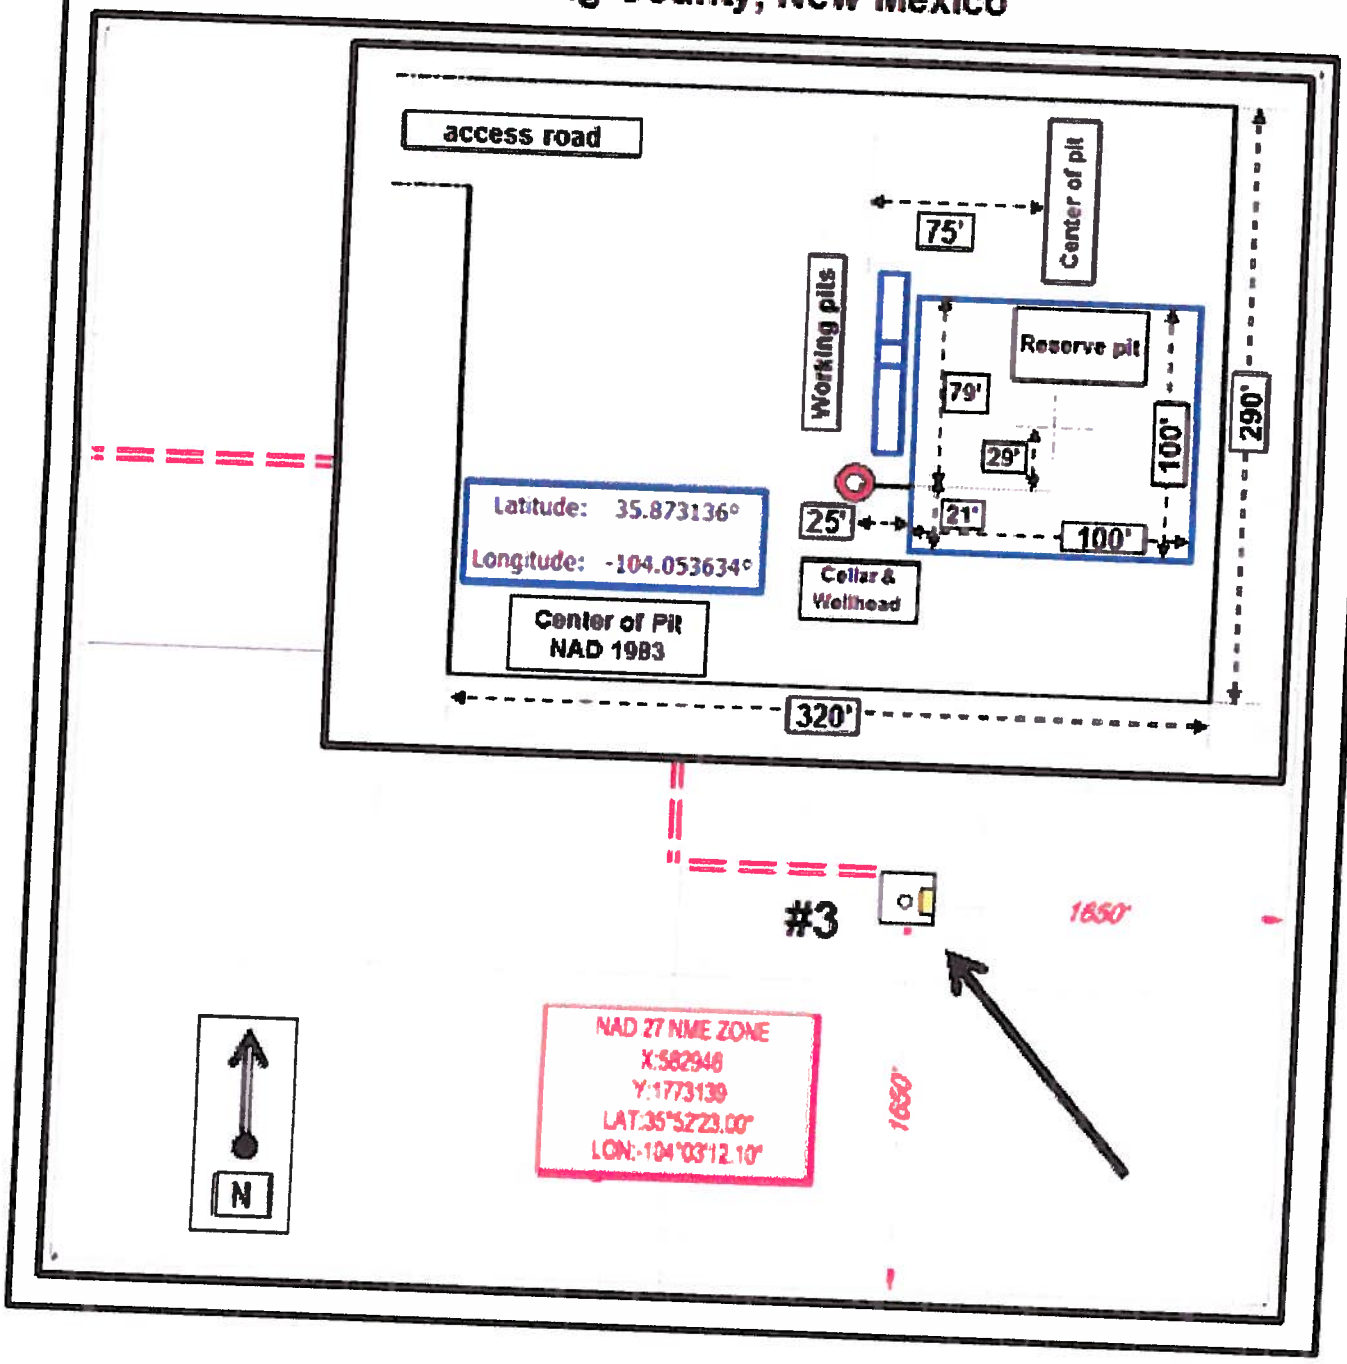

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

June 03, 2015

Dorotea 1927 15#3

ROBERT MCNAUGHTON

WHITING OIL & GAS

400 W. ILLINOIS, SUITE 1300

MIDLAND, TX 79701

RE: WEST BRAVO DOME

Enclosed are the results of analyses for samples received by the laboratory on 05/27/15 8:05.

Cardinal Laboratories is accredited through Texas NELAP under certificate number T104704398-13-5. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Total Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Cardinal Laboratories is accredited through the State of New Mexico Environment Department for:

Method SM 9223-B	Total Coliform and E. coli (Colilert MMO-MUG)
Method EPA 524.2	Regulated VOCs and Total Trihalomethanes (TTHM)
Method EPA 552.2	Total Haloacetic Acids (HAA-5)

Accreditation applies to public drinking water matrices for State of Colorado and New Mexico.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITTING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
DOROTEO 1927-15 #3 PIT MIXTUR	H501310-01	Soil	26-May-15 09:30	27-May-15 08:05

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

DOROTEO 1927-15 #3 PIT MIXTURE

H501310-01 (Soil)

Analyte	Result	MDL	Reporting Limit	Units	Dilution	Batch	Analyst	Analyzed	Method	Notes
Cardinal Laboratories										
Inorganic Compounds										
Chloride	**384**		16.0	mg/kg	4	5052804	AP	28-May-15	4500-Cl-B	
Organic Compounds										
TPH 418.1	**1140**		100	mg/kg	10	5060301	CK	03-Jun-15	418.1	
Volatile Organic Compounds by EPA Method 8021										
Benzene*	ND		0.050	mg/kg	50	5052808	MS	29-May-15	8021B	
Toluene*	ND		0.050	mg/kg	50	5052808	MS	29-May-15	8021B	
Ethylbenzene*	ND		0.050	mg/kg	50	5052808	MS	29-May-15	8021B	
Total Xylenes*	ND		0.150	mg/kg	50	5052808	MS	29-May-15	8021B	
Total BTEX	ND		0.300	mg/kg	50	5052808	MS	29-May-15	8021B	
Surrogate: 4-Bromofluorobenzene (PID)			*115 %*	*61-154*		*5052808*	MS	*29-May-15*	*8021B*	
Petroleum Hydrocarbons by GC FID										
GRO C6-C10	ND		10.0	mg/kg	1	5052701	MS	27-May-15	8015B	
DRO >C10-C28	**33.6**		10.0	mg/kg	1	5052701	MS	27-May-15	8015B	
Surrogate: 1-Chlorooctane			*111 %*	*47.2-157*		*5052701*	MS	*27-May-15*	*8015B*	
Surrogate: 1-Chlorooctadecane			*125 %*	*52.1-176*		*5052701*	MS	*27-May-15*	*8015B*	

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

Inorganic Compounds - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch 5052804 - 1:4 DI Water										
Blank (5052804-BLK1)				Prepared & Analyzed: 28-May-15						
Chloride	ND	16.0	mg/kg							
LCS (5052804-BS1)				Prepared & Analyzed: 28-May-15						
Chloride	416	16.0	mg/kg	400		104	80-120			
LCS Dup (5052804-BSD1)				Prepared & Analyzed: 28-May-15						
Chloride	416	16.0	mg/kg	400		104	80-120	0.00	20	

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

Organic Compounds - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch 5060301 - Solvent Extraction										
Blank (5060301-BLK1)				Prepared & Analyzed: 03-Jun-15						
TPH 418.1	ND	100	mg/kg							
LCS (5060301-BS1)				Prepared & Analyzed: 03-Jun-15						
TPH 418.1	5630	100	mg/kg	5000		113	70-130			
LCS Dup (5060301-BSD1)				Prepared & Analyzed: 03-Jun-15						
TPH 418.1	5500	100	mg/kg	5000		110	70-130	2.35	20	

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

Volatile Organic Compounds by EPA Method 8021 - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch 5052808 - Volatiles										
Blank (5052808-BLK1)				Prepared & Analyzed: 28-May-15						
Benzene	ND	0.050	mg/kg							
Toluene	ND	0.050	mg/kg							
Ethylbenzene	ND	0.050	mg/kg							
Total Xylenes	ND	0.150	mg/kg							
Total BTEX	ND	0.300	mg/kg							
Surrogate: 4-Bromofluorobenzene (PID)	*0.0548*		mg/kg	*0.0500*		*110*	*61-154*			
LCS (5052808-BS1)				Prepared & Analyzed: 28-May-15						
Benzene	1.97	0.050	mg/kg	2.00		98.4	77.1-114			
Toluene	2.00	0.050	mg/kg	2.00		100	67-114			
Ethylbenzene	1.97	0.050	mg/kg	2.00		98.4	63.5-121			
Total Xylenes	5.73	0.150	mg/kg	6.00		95.4	62.4-125			
Surrogate: 4-Bromofluorobenzene (PID)	*0.0506*		mg/kg	*0.0500*		*101*	*61-154*			
LCS Dup (5052808-BSD1)				Prepared & Analyzed: 28-May-15						
Benzene	1.94	0.050	mg/kg	2.00		96.9	77.1-114	1.54	16.4	
Toluene	1.97	0.050	mg/kg	2.00		98.5	67-114	1.57	16.2	
Ethylbenzene	1.93	0.050	mg/kg	2.00		96.6	63.5-121	1.91	17	
Total Xylenes	5.60	0.150	mg/kg	6.00		93.4	62.4-125	2.20	17	
Surrogate: 4-Bromofluorobenzene (PID)	*0.0501*		mg/kg	*0.0500*		*100*	*61-154*			

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

WHITING OIL & GAS 400 W. ILLINOIS, SUITE 1300 MIDLAND TX, 79701	Project: WEST BRAVO DOME Project Number: NONE GIVEN Project Manager: ROBERT MCNAUGHTON Fax To: NONE	Reported: 03-Jun-15 09:55

Petroleum Hydrocarbons by GC FID - Quality Control

Cardinal Laboratories

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch 5052701 - General Prep - Organics										
Blank (5052701-BLK1)				Prepared & Analyzed: 27-May-15						
GRO C6-C10	ND	10.0	mg/kg							
DRO >C10-C28	ND	10.0	mg/kg							
EXT DRO >C28-C35	ND	10.0	mg/kg							
Total TPH C6-C28	ND	10.0	mg/kg							
Surrogate: 1-Chlorooctane	*53.4*		mg/kg	*50.0*		*107*	*47.2-157*			
Surrogate: 1-Chlorooctadecane	*63.2*		mg/kg	*50.0*		*126*	*52.1-176*			
LCS (5052701-BS1)				Prepared & Analyzed: 27-May-15						
GRO C6-C10	188	10.0	mg/kg	200		94.1	72.5-115			
DRO >C10-C28	206	10.0	mg/kg	200		103	81.3-118			
Total TPH C6-C28	394	10.0	mg/kg	400		98.5	80-113			
Surrogate: 1-Chlorooctane	*55.4*		mg/kg	*50.0*		*111*	*47.2-157*			
Surrogate: 1-Chlorooctadecane	*62.1*		mg/kg	*50.0*		*124*	*52.1-176*			
LCS Dup (5052701-BSD1)				Prepared & Analyzed: 27-May-15						
GRO C6-C10	182	10.0	mg/kg	200		90.8	72.5-115	3.57	10.1	
DRO >C10-C28	196	10.0	mg/kg	200		97.8	81.3-118	5.17	15.3	
Total TPH C6-C28	377	10.0	mg/kg	400		94.3	80-113	4.40	12.1	
Surrogate: 1-Chlorooctane	*52.1*		mg/kg	*50.0*		*104*	*47.2-157*			
Surrogate: 1-Chlorooctadecane	*60.3*		mg/kg	*50.0*		*121*	*52.1-176*			

Cardinal Laboratories

*=Accredited Analyte

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

Company Name:	Whiting Oil & Gas
Project Manager:	Robert J McNaughton
Address:	400 W. Illinois, Suite 1300
City:	Midland State: Tx Zip: 79701
Phone #:	806-471-5628 Fax #:
Project #:	Project Owner:
Project Name:	West Bravo Dome
Project Location:	Harding Co., NM
Sampler Name:	Denny Holcomb

BILL TO

P.O. #:	
Company:	Whiting Oil & Gas
Attn:	Gary Bullock
Address:	400 W. Illinois, Suite 1300
City:	Midland
State:	Tx Zip: 79701
Phone #:	
Fax #:	

ANALYSIS REQUEST

FOR LAB USE ONLY Lab I.D.	Sample I.D.	(G)RAB OR (C)OMP.	# CONTAINERS	MATRIX: GROUNDWATER	WASTEWATER	SOIL	OIL	SLUDGE	OTHER	PRESERV: ACID/BASE	ICE / COOL	OTHER	SAMPLING DATE	SAMPLING TIME	TPH 8015	TPH 418.1	Btex	Cl
H501310-1	Dolores 1927-15 3 pit mixture	C	1			✓					✓		5/26/15	9:30a	✓	✓	✓	✓

Relinquished By:	Date: 5-27-15	Received By:	
Relinquished By:	Time: 8:05	Received By:	
Delivered By: (Circle One)	Date:	Time:	
Sampler - UPS - Bus - Other:	14.6°C	Sample Condition Cool: Yes / No Intact: Yes / No	CHECKED BY: (Initials)

Phone Result: ☐ Yes ☒ No Add'l Phone #:
Fax Result: ☐ Yes ☒ No Add'l Fax #:
REMARKS:

Email results to:
djholcomb75@gmail.com
Kay.maddox@whiting.com

Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2326


WHITING
Whiting
Oil & Gas Corp.
DOROTEO 1927-15 #3
UNIT J. SEC. 15. T19N. R27E
1650' FSL & 1650' FEL
API #30-021-20681 HARDING CO., NM

View looking west

VIEW LOOKING SOUTH

View looking North

View looking East

Version120804

WHITING OIL & GAS CORPORATION

Workover and Completion Report

Well Name:	Doroteo 1927-15#3	Field:	Other	Date:	06/29/15	Day:	29	Type:	Initial Completion		
API:	30-021-20681	Move On Date:	12/23/2014	AFE #:	14-2071-01	Rig:	NA	Supv	DH	Depth:	2,940

Present Operation: Well Closed In

Csg:	5-1/2" 15.5# J-55	Liner:	N/A
Rods:	N/A	Perfs:	2742' - 2758' (0.42" holes 6 SPF)
Tbg:	None		Click to Calc. HP - Hrs

GHG Gas Vol(Mcf)	0	Dur. Hrs	0	mcf/d	0	% of gas		Gas Volume Estimated ??		Producing Method			
Total Rig Hrs:	0	Daily Activity				GHG Event Total HP/Hr (Units > 130 HP)	0	for	0.0	hrs	Units <= 130 HP (Count)		

4/23/15
MI Hartley Construction dirt equipment to begin reserve pit closure. Mix contents with clean dirt to stabilize contents. MO dirt equipment.
5/28/15 - 5/29/15
MI dirt equipment, mix pit contents with additional clean dirt to stabilize contents. MO dirt equipment.
6/29/15
MI dirt equipment to perform reserve pit closure per NMOCD rules. Remove barbed wire fencing and posts. Mix pit contents with additional clean dirt to stabilize contents. Cover stabilized cuttings with new 20 mil LLDPE liner cap, fold over outside edges of pit liner bottom, cover new liner cap with a minimum of 4 feet of dirt cover, MO dirt equipment. NMOCD notified and not present.
6/30/15
Plan to perform final blade work and install 4.5" OD steel pit burial marker in center of pit burial (set in concrete). Will reseed pit closure area during 2015 planting season. Danny

Costs:

Expense Account Codes	Capital Account Codes	Comments	Amount
	811.94 Contract Services and Equipme	Hartley Construction - pit closure	$ 14,193.41
	811.39 Contract Labor	EWC - consultant	$ 1,350.00
	811.94 Contract Services and Equipme	Globe Trucking - dewater pit	$ 4,200.00

Daily Total:	$ 19,743
Prev. Total:	
Cum. Total:	$ 19,743

Submit 1 Copy To Appropriate District Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

WELL API NO.
30-021-20681

5. Indicate Type of Lease
STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

7. Lease Name or Unit Agreement Name
DOROTEO 1927 15

8. Well Number 03

2. Name of Operator
WHITING OIL AND GAS CORPORATION

9. OGRID Number 25078

3. Address of Operator
400 W ILLINOIS STE 1300 MIDLAND, TX 79701

10. Pool name or Wildcat
WILDCAT; TUBB CO2 GAS POOL

4. Well Location
Unit Letter J 1650 feet from the SOUTH line and 1650 feet from the EAST line
Section 15 Township 19N Range 27E NMPM County HARDING

11. Elevation *(Show whether DR, RKB, RT, GR, etc.)*
5598' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:				SUBSEQUENT REPORT OF:			
PERFORM REMEDIAL WORK	☐	PLUG AND ABANDON	☐	REMEDIAL WORK	☐	ALTERING CASING	☐
TEMPORARILY ABANDON	☐	CHANGE PLANS	☐	COMMENCE DRILLING OPNS.	☐	P AND A	☐
PULL OR ALTER CASING	☐	MULTIPLE COMPL	☐	CASING/CEMENT JOB	☐		
DOWNHOLE COMMINGLE	☐						
CLOSED-LOOP SYSTEM	☐						
OTHER:	☐			OTHER: TEMPORARY PIT CLOSED	☒		

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

12/26/2014 SPUDDED WELL
12/27/2014 DRLD 12 ¼" HOLE, RAN J-55, 9 5/8 36# CSG SET @ 771' W/300 CL C SXS CMT (12.10PPG, 2.40 YIELD) + 150 SXS CMT (14.8PPG, 1.34 YIELD) CIRC 80 BBLS CMT TO SURF, PRESS UP TO 600#, HELD
01/10/2015 REACHED TD 2942'
01/11/2015 DRLD 8 ¾" HOLE, RAN J-55, 5 ½" 15.5# CSGSET @ 2940 W/ 750 CL C SXS LEAD CMT (12.10 PPG, 2.40 YIELD) + 300 SXS CL C (14.8 PPG, 6.3 YIELD) CIRCULATED 100 SXS CMT TO SURFACE, PRESS UP TO 600# HELD
01/12/2015 RIG RELEASED
06/29/2015 TEMPORARY PIT CLOSED

Spud Date: 12/26/2014 Rig Release Date: 01/12/2015

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kay Maddox TITLE: REGULATORY ANALYST DATE: 07/27/2015

Type or print name Kay Maddox E-mail address: kay.Maddox@Whiting.com PHONE: 432-638-8475

For State Use Only

APPROVED BY:_____ TITLE_____ DATE_____
Conditions of Approval (if any):

July 27, 2015

Mr. Leonard Lowe
New Mexico Oil Conservation Division
1220 S. St. Francis Dr
Santa Fe, NM 87505

RE: Pit Closure

Dear Mr. Lowe,

Whiting Oil & Gas shall re-seed the disturbed Pit area for the well listed below. The re-seeding shall occur in the next rainy season documented for Harding County, New Mexico approximately August/September 2015.

If you have additional question please contact me @ 432.686.6709 or kay.maddox@whiting.com
Thank you for your time.

Sincerely,

Kay Maddox

Kay Maddox
Regulatory Supervisor

DOROTEO 1927 15 Well # 3
30-021-20681
Harding County, New Mexico

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II
1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals, and Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 copies
Fee Lease - 3 copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

[1] API Number	[2] Pool Code	[3] Pool Name
	98104	WILDCAT; Tubb CO2 GAS POOL

[4] Property Code	[5] Property Name	[6] Well Number
	DOROTEO 1927-15	#3

[7] OGRID No.	[8] Operator Name	[9] Elevation
25078	WHITING OIL & GAS CORPORATION	5598'

[10] Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	15	19 NORTH	27 EAST, N.M.P.M.		1650'	SOUTH	1650'	EAST	HARDING

[11] Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

[12] Dedicated Acres	[13] Joint or Infill	[14] Consolidation Code	[15] Order No.
160			

NO ALLOWABLE WELL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

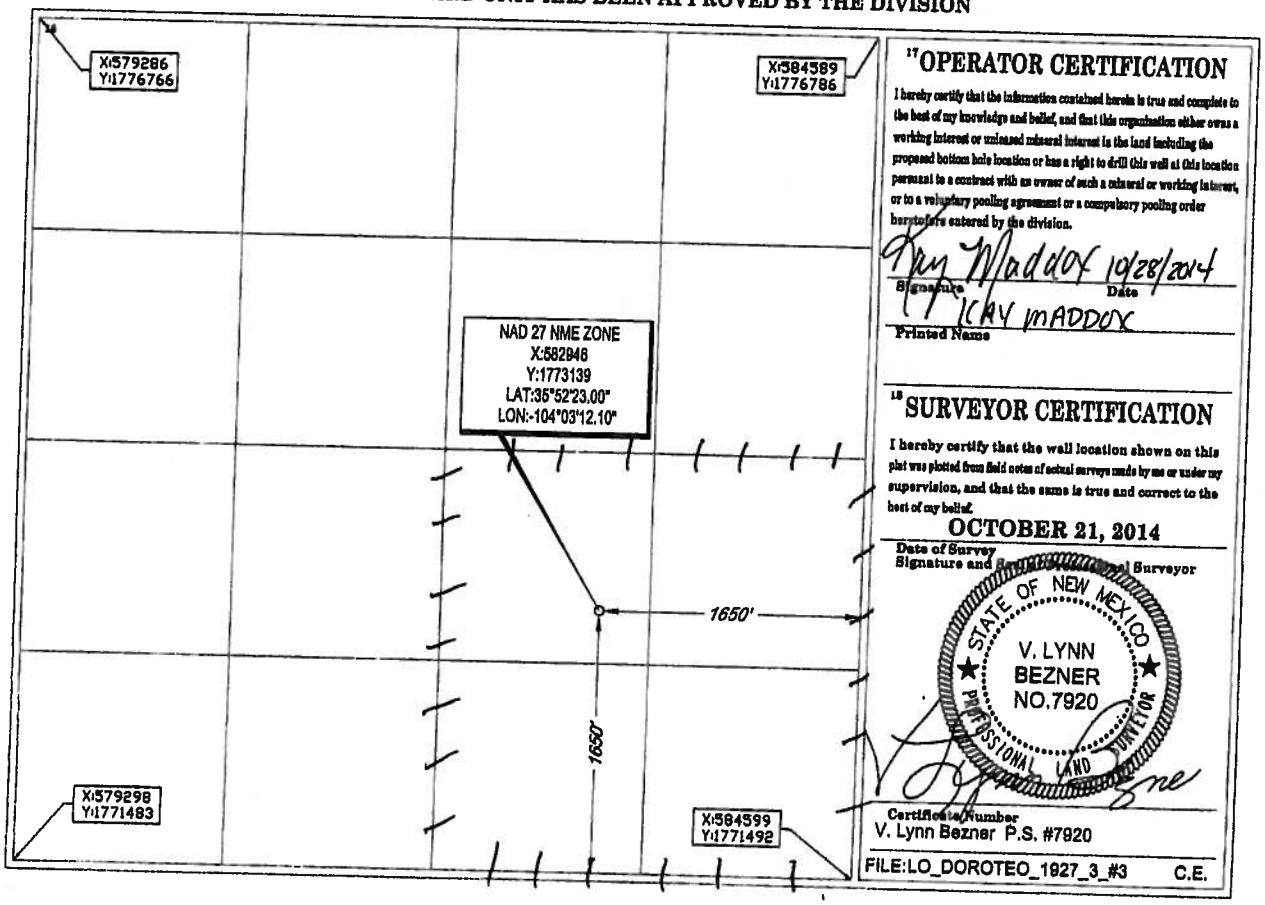

[17] OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Ray Maddox 10/28/2014
Signature Date

RAY MADDOX
Printed Name

[18] SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 21, 2014
Date of Survey
Signature and Seal of Professional Surveyor

STATE OF NEW MEXICO
V. LYNN BEZNER
NO.7920
PROFESSIONAL LAND SURVEYOR

Certificate Number
V. Lynn Bezner P.S. #7920

FILE:LO_DOROTEO_1927_3_#3 C.E.