

Form 3160-3
(June 2015)

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|---|--|--|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 5. Lease Serial No. NMNM139386 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. BULLITT 06 FED 607H 9. API Well No. 30 043 21366 |
| 2. Name of Operator EOG RESOURCES INCORPORATED | | 10. Field and Pool, or Exploratory WILDCAT/OIL WC 21N4W6;GALLUP 11. Sec., T. R. M. or Blk. and Survey or Area SEC 6/T21N/R4W/NMP |
| 3a. Address 1111 BAGBY SKY LOBBY2, HOUSTON, TX 77002 | 3b. Phone No. (include area code) (713) 651-7000 | |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface LOT 14 / 1069 FSL / 590 FWL / LAT 36.0736765 / LONG -107.3040459 At proposed prod. zone LOT 2 / 235 FNL / 2626 FEL / LAT 36.0845897 / LONG -107.3148956 | | |
| 14. Distance in miles and direction from nearest town or post office* 20 miles | | 12. County or Parish SANDOVAL 13. State NM |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 15 feet | 16. No of acres in lease 17. Spacing Unit dedicated to this well 318.29 | |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 590 feet | 19. Proposed Depth 4883 feet / 9760 feet 20. BLM/BIA Bond No. in file FED: NM2308 | |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 7063 feet | 22. Approximate date work will start* 10/31/2020 23. Estimated duration 60 days | |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

| | | |
|---|--|--------------------|
| 25. Signature (Electronic Submission) | Name (Printed/Typed) LACEY GRANILLO / Ph: (713) 651-7000 | Date 09/14/2020 |
| Title Contractor Regulatory Specialist | | |
| Approved by (Signature) (Electronic Submission) | Name (Printed/Typed) VIRGINIA BARBER / Ph: (505) 564-7600 | Date 12/21/2020 |
| Title ADJUDICATOR Office Farmington Field Office | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Continued on page 2)

*(Instructions on page 2)

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | | | | |
|--|--|--|--|---|---|
| ¹ API Number 30 043 21366 | | ² Pool Code 98350 | | ³ Pool Name WC 21N4W6;GALLUP WILDCAT OIL | |
| ⁴ Property Code 329932 | | ⁵ Property Name BULLITT 6 FED | | | ⁶ Well Number 607H |
| ⁷ OGRID No. 7377 | | ⁸ Operator Name EOG RESOURCES, INC. | | | ⁹ Elevation 7063' |

¹⁰Surface Location


| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|----------|
| 14 | 6 | 21-N | 4-W | - | 1069' | SOUTH | 590' | WEST | SANDOVAL |

¹¹Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|----------|
| 2 | 1 | 21-N | 5-W | - | 235' | NORTH | 2626' | EAST | SANDOVAL |

| | | | |
|--|-------------------------------|----------------------------------|-------------------------|
| ¹² Dedicated Acres 318.29 | ¹³ Joint or Infill | ¹⁴ Consolidation Code | ¹⁵ Order No. |
|--|-------------------------------|----------------------------------|-------------------------|

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

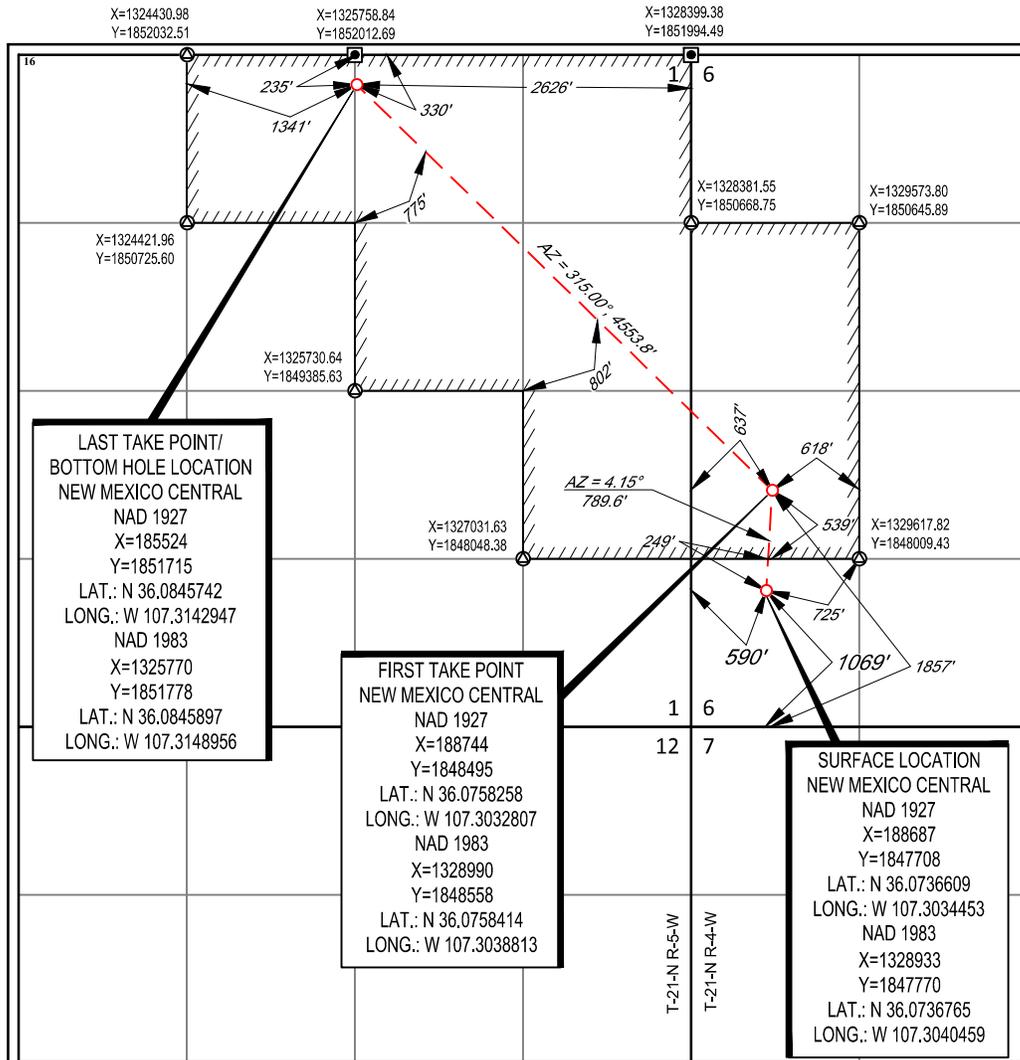

¹⁷OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Tina Huerta 9/17/20
Signature Date

Tina Huerta
Printed Name

tina_huerta@eogresources.com
E-mail Address

¹⁸SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.

08/25/2020
Date of Survey

RAMONA A. DOMINGUEZ
NEW MEXICO
PROFESSIONAL SURVEYOR
24508
Signature and Seal of Professional Surveyor

Certificate Number

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 9/8/20

Original Operator & OGRID No.: EOG Resources, Inc. 7377

Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

| Well Name | API | Well Location (ULSTR) | Footages | Expected MCF/D | Flared or Vented | Comments |
|---------------------|---------|-----------------------|--------------------|----------------|------------------|----------|
| BULLITT 06 FED 601H | PENDING | 14-6-21N-4W | 1036 FSL & 559 FWL | 2000 | Flared | |
| BULLITT 06 FED 602H | PENDING | 14-6-21N-4W | 1019 FSL & 577 FWL | 2000 | Flared | |
| BULLITT 06 FED 603H | PENDING | 14-6-21N-4W | 1047 FSL & 569 FWL | 2000 | Flared | |
| BULLITT 06 FED 604H | PENDING | 14-6-21N-4W | 1030 FSL & 587 FWL | 2000 | Flared | |
| BULLITT 06 FED 605H | PENDING | 14-6-21N-4W | 1058 FSL & 579 FWL | 2000 | Flared | |
| BULLITT 06 FED 606H | PENDING | 14-6-21N-4W | 1041 FSL & 598 FWL | 2000 | Flared | |
| BULLITT 06 FED 607H | PENDING | 14-6-21N-4W | 1069 FSL & 590 FWL | 2000 | Flared | |
| BULLITT 06 FED 608H | PENDING | 14-6-21N-4W | 1051 FSL & 608 FWL | 2000 | Flared | |
| BULLITT 06 FED 609H | PENDING | 14-6-21N-4W | 1080 FSL & 600 FWL | 2000 | Flared | |
| BULLITT 06 FED 610H | PENDING | 14-6-21N-4W | 1062 FSL & 618 FWL | 2000 | Flared | |

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are completed. Harvest Midstream or Enterprise Products Partner and other local midstream providers are being evaluated for potential connections. It will require >30,000' of pipeline to connect the facility to a gas gathering system. The actual flow of the gas will be based on compression operating parameters and gathering system pressure.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues at that time. Based on current information, it is EOG Resources Inc. belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

**EOG RESOURCES, INC.
BULLITT 6 FED NO. 607H**

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | | | | |
|---------------------------------------|--|--|--|--|---|
| ¹ API Number | | ² Pool Code | | ³ Pool Name WILDCAT OIL | |
| ⁴ Property Code | | ⁵ Property Name BULLITT 6 FED | | | ⁶ Well Number 607H |
| ⁷ OGRID No. 7377 | | ⁸ Operator Name EOG RESOURCES, INC. | | | ⁹ Elevation 7063' |

¹⁰Surface Location

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|----------|
| 14 | 6 | 21-N | 4-W | - | 1069' | SOUTH | 590' | WEST | SANDOVAL |

¹¹Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|----------|
| 2 | 1 | 21-N | 5-W | - | 235' | NORTH | 2626' | EAST | SANDOVAL |

1. GEOLOGIC NAME OF SURFACE FORMATION:

Nacimiento

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

| | MD | TVD |
|----------------------|-----------|------------|
| Pictured Cliffs | 1,678' | 1,665' |
| Huerfanito Bentonite | 1,967' | 1,950' |
| Mesaverde | 2,425' | 2,401' |
| Menefee | 3,173' | 3,138' |
| Point Lookout | 3,922' | 3,875' |
| Mancos Shale | 4,078' | 4,029' |
| Gallup | 4,640' | 4,586' |
| Horizontal TD | 9,760' | 4,883' |

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

| | TVD | |
|-----------------|------------|---------|
| Pictured Cliffs | 1,665' | Gas |
| Mesaverde | 1,950' | Gas |
| Menefee | 2,401' | Gas/Oil |
| Point Lookout | 3,138' | Oil |
| Mancos Shale | 3,875' | Oil |
| Gallup | 4,586' | Oil |

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 13.375" casing at 300' and circulating cement back to surface.

**EOG RESOURCES, INC.
BULLITT 6 FED NO. 607H**

4. CASING PROGRAM - NEW

Hole & Casing String:

| Hole Size | Interval (MD) | Interval (TVD) | Csg OD | Weight | Grade | Conn | DF _{min} Collapse | DF _{min} Burst | DF _{min} Joint Tension | DF _{min} Body Tension |
|-----------|----------------|----------------|---------|--------|-------|------|----------------------------|-------------------------|---------------------------------|--------------------------------|
| 17.5" | 0'-300' | 300' | 13 3/8" | 48# | H-40 | STC | 1.125 | 1.25 | 1.60 | 1.80 |
| 12.25" | 0' - 3,338' | 3,300' | 9 5/8" | 36# | J-55 | LTC | 1.125 | 1.25 | 1.60 | 1.80 |
| 8.75" | 0'- 5,205' | 4,883' | 5 1/2" | 17# | P-110 | BTC | 1.125 | 1.25 | 1.60 | 1.80 |
| 8.5" | 5,205'- 9,760' | 4,883' | 5 1/2" | 17# | P-110 | BTC | 1.125 | 1.25 | 1.60 | 1.80 |

Cementing Program:

Note: Cement volumes based on bit size plus at least 100% excess on surface (TOC @ Surface), 100% excess in intermediate (TOC @ Surface) and 35% excess in production string (TOC @ 500' into previous casing string).

Cement Design:

| Depth | No. Sacks | Wt. lb/gal | Yld Ft ³ /sk | Volume Ft ³ | Slurry Description |
|--------|-----------|------------|-------------------------|------------------------|--|
| 300' | 315 | 14.8 | 1.34 | 422 | Tail: Class 'C' + 2%PF1(Calcium Chloride) |
| 3,338' | 1010 | 12.8 | 1.79 | 1808 | Lead: 35:65 Poz C + .02 gal/sk Anti Foam + 1% Extender + .13 lb/sk Lost Circulation |
| | 220 | 14.8 | 1.33 | 293 | Tail: Class C + 0.13% Anti Foam |
| 9,760' | 335 | 11.9 | 2.47 | 804 | Lead: Class 50/50 PozC + 5%PF44(BWOW)(Salt) + 10% PF20(Bentonite Gel) +.2%PF153(Anti Settling Agent(+ 3#/sk OF42(Kolseal) + 0.125#/sk PF29 (celloflake) + 0.4#/sk PF45 (Defoamer) |
| | 960 | 13 | 1.48 | 1421 | Tail: Class PVL + 1.3% PF44(BWOW)(Salt) + 5% PF174 (Expanding Cement) + 0.5% PF606 (Fluid Loss) + 0.1% PF153 (Anti Settling Agent) + 0.4#/sk PF45 (Defoamer) |

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

A variance is requested to use a co-flex line between the BOP and choke manifold, dependent on rig selection (instead of using a steel line). Certification and specs are attached at the end of the drilling plan.

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a double rams with blind rams & pipe rams preventer (3,000 psi WP) and an annular preventer (3,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill

**EOG RESOURCES, INC.
BULLITT 6 FED NO. 607H**

pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 3,000/ 250 psig and the annular preventer to 1,500/ 250 psig. The surface casing will be tested to 1200 psi for 30 minutes.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the surface casing shoe.

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

| Depth | Type | Weight (ppg) | Viscosity | Water Loss | Comments |
|----------------------------------|-------------|--------------|-----------|------------|--------------------------------------|
| 0 – 300' | Fresh Water | 8.6-8.8 | 28-32 | N/c | |
| 300' – 3,338' Vertical | WBM | 8.8-9.4 | 30-34 | N/c | |
| 3,338' – 9,760' Curve/Lateral | WBM | 8.8-9.4 | 30-34 | <10 | OBM Requested as a contingency |

The highest mud weight needed to balance formation is expected to be 9.4 ppg. In order to maintain hole stability, mud weights up to 9.4 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

**EOG RESOURCES, INC.
BULLITT 6 FED NO. 607H**

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

8. LOGGING, TESTING AND CORING PROGRAM:

GR–Directional surveys will be run in open hole during drilling phase of operations.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 140 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 2387 psig (based on 9.4 ppg MW). Hydrogen sulfide has been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from spud to surface casing point.

10. ANTICIPATED DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

- (A) EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both “A” and “B” sections). The weld will be tested to 1000 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

**EOG RESOURCES, INC.
BULLITT 6 FED NO. 607H**

11. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13 3/8" BOP/BOPE system with a minimum working pressure of 3,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 3,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 3,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s).

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

The surface casing string will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.

12. COMPLETION AND PRODUCTION PLAN:

Frac: Lateral will be fracture stimulated with approximately 180,000 bbls slick water fluid.

Flowback: Well will be flowed back through production tubing. An ESP may be used to assist in load water recovery.

Production: Well will produce up production tubing into production and storage facilities.



Midwest Hose & Specialty, Inc.

| INTERNAL HYDROSTATIC TEST CERTIFICATE | | |
|---|---|--|
| Customer: GRAND JUNCTION | | Customer P.O. Number: 178755 |
| HOSE SPECIFICATIONS | | |
| Type: CHOKE HOSE GRADE E / API 7K | Hose Length: 15 FEET | |
| I.D. 4 INCHES | O.D. 6.11 INCHES | |
| WORKING PRESSURE 10,000 PSI | TEST PRESSURE 15,000 PSI | BURST PRESSURE N/A PSI |
| COUPLINGS | | |
| Part Number E4.0X64WB E4.0X64WB | Stem Lot Number 8099764 8099764 | Ferrule Lot Number N4406 N4406 |
| Type of Coupling: SWAGE-IT | Die Size: 6.62 INCHES | |
| PROCEDURE | | |
| <i>Hose assembly pressure tested with water at ambient temperature.</i> | | |
| TIME HELD AT TEST PRESSURE 9 3/4 MIN. | ACTUAL BURST PRESSURE: N/A PSI | |
| Hose Assembly Serial Number: 197000 | Hose Serial Number: 10088 | |
| Comments: | | |
| Date: 4/10/2013 | Tested: <i>Bulle Belek</i> | Approved: <i>John Miller</i> |

April 10, 2013

Internal Hydrostatic Test Graph

Customer: Grand J

Pick Ticket #: 197000




Midwest Hose & Specialty, Inc.

Hose Specifications

Hose Type: E
 I.D.: 4"
 Working Pressure: 10000 PSI
 Length: 15'
 O.D.: 6.11"
 Burst Pressure: Standard Safety Multiplier Applies

Verification

Type of Fitting: 4 1/16 10K
 Die Size: 6.62
 Hose Serial #: 10088
 Coupling Method: Swage
 Final O.D.: 6.65"
 Hose Assembly Serial #: 197000

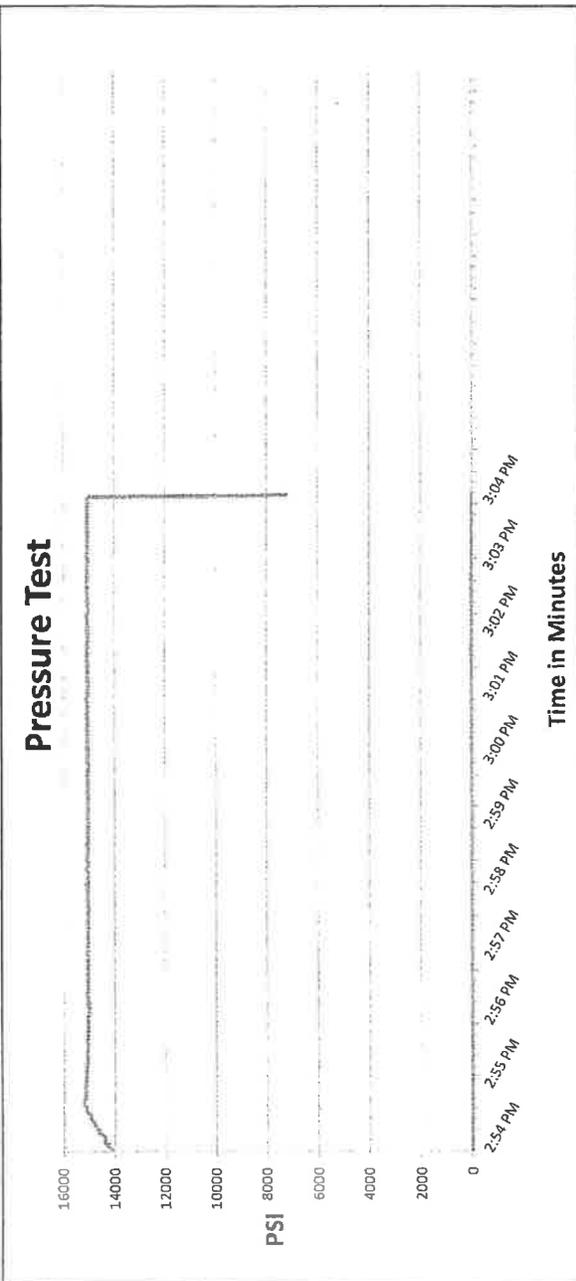

Test Pressure: 15000 PSI
 Time Held at Test Pressure: 9 3/4 Minutes
 Actual Burst Pressure: 15263 PSI
 Peak Pressure: 15263 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Billy Balak

Approved By: Joshua Dahlem



EOG Resources - Artesia

Sandoval County (NAD83)

Bullitt

Bullitt 6 Fed #607H

Lateral

Plan: Plan #1

Standard Planning Report

27 August, 2020



EOG Resources
Planning Report

| | | | |
|------------------|-------------------------|-------------------------------------|--------------------------------|
| Database: | EDM | Local Co-ordinate Reference: | Well Bullitt 6 Fed #607H |
| Company: | EOG Resources - Artesia | TVD Reference: | KB @ 7084.0usft (Planning Rig) |
| Project: | Sandoval County (NAD83) | MD Reference: | KB @ 7084.0usft (Planning Rig) |
| Site: | Bullitt | North Reference: | Grid |
| Well: | Bullitt 6 Fed #607H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Lateral | | |
| Design: | Plan #1 | | |

| | | | |
|--------------------|---------------------------|----------------------|----------------|
| Project | Sandoval County (NAD83) | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | New Mexico Central Zone | | |

| | | | | | |
|------------------------------|------------------|---------------------|-------------------|--------------------------|---------|
| Site | Bullitt | | | | |
| Site Position: | Northing: | 1,847,706.00 usft | Latitude: | 36° 4' 24.595 N | |
| From: Map | Easting: | 1,328,870.00 usft | Longitude: | 107° 18' 15.327 W | |
| Position Uncertainty: | 0.0 usft | Slot Radius: | 13-3/16 " | Grid Convergence: | -0.62 ° |

| | | | | | | |
|-----------------------------|---------------------|----------------------------|------------------|----------------------|-------------------|-------------------|
| Well | Bullitt 6 Fed #607H | | | | | |
| Well Position | +N/-S | 64.0 usft | Northing: | 1,847,770.00 usft | Latitude: | 36° 4' 25.235 N |
| | +E/-W | 63.0 usft | Easting: | 1,328,933.00 usft | Longitude: | 107° 18' 14.568 W |
| Position Uncertainty | 0.0 usft | Wellhead Elevation: | | Ground Level: | 7,063.0 usft | |

| | | | | | |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| Wellbore | Lateral | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | IGRF2020 | 8/20/2020 | 8.69 | 62.73 | 49,358.65113433 |

| | | | | |
|--------------------------|--------------------------------|---------------------|----------------------|----------------------|
| Design | Plan #1 | | | |
| Audit Notes: | | | | |
| Version: | Phase: | PLAN | Tie On Depth: | 0.0 |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft) | Direction (°) |
| | 0.0 | 0.0 | 0.0 | 321.72 |

| | | | | |
|---------------------------------|------------------------|---------------------------|---------------------|----------------|
| Plan Survey Tool Program | Date | 8/27/2020 | | |
| Depth From (usft) | Depth To (usft) | Survey (Wellbore) | Tool Name | Remarks |
| 1 | 0.0 | 9,759.5 Plan #1 (Lateral) | MWD | |
| | | | OWSG MWD - Standard | |

| Plan Sections | | | | | | | | | | |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|------------------------|-----------------------|---------|----------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 998.6 | 9.97 | 41.28 | 996.1 | 32.5 | 28.5 | 2.00 | 2.00 | 0.00 | 41.28 | |
| 3,956.6 | 9.97 | 41.28 | 3,909.4 | 417.5 | 366.5 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 4,455.2 | 0.00 | 0.00 | 4,405.5 | 450.0 | 395.0 | 2.00 | -2.00 | 0.00 | 180.00 | |
| 5,205.2 | 90.00 | 315.00 | 4,883.0 | 787.6 | 57.4 | 12.00 | 12.00 | -6.00 | 315.00 | |
| 9,759.5 | 90.00 | 315.00 | 4,883.0 | 4,008.0 | -3,163.0 | 0.00 | 0.00 | 0.00 | 0.00 | [B6F#607H]PBHL |



EOG Resources
Planning Report

| | | | |
|------------------|-------------------------|-------------------------------------|--------------------------------|
| Database: | EDM | Local Co-ordinate Reference: | Well Bullitt 6 Fed #607H |
| Company: | EOG Resources - Artesia | TVD Reference: | KB @ 7084.0usft (Planning Rig) |
| Project: | Sandoval County (NAD83) | MD Reference: | KB @ 7084.0usft (Planning Rig) |
| Site: | Bullitt | North Reference: | Grid |
| Well: | Bullitt 6 Fed #607H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Lateral | | |
| Design: | Plan #1 | | |

| Planned Survey | | | | | | | | | |
|---------------------------|-----------------|-------------|-----------------------|-------------|-------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N-S (usft) | +E-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 200.0 | 0.00 | 0.00 | 200.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 300.0 | 0.00 | 0.00 | 300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| BEGIN 2*/100 | | | | | | | | | |
| 600.0 | 2.00 | 41.28 | 600.0 | 1.3 | 1.2 | 0.3 | 2.00 | 2.00 | 0.00 |
| 700.0 | 4.00 | 41.28 | 699.8 | 5.2 | 4.6 | 1.3 | 2.00 | 2.00 | 0.00 |
| 800.0 | 6.00 | 41.28 | 799.5 | 11.8 | 10.4 | 2.8 | 2.00 | 2.00 | 0.00 |
| 900.0 | 8.00 | 41.28 | 898.7 | 21.0 | 18.4 | 5.1 | 2.00 | 2.00 | 0.00 |
| 998.6 | 9.97 | 41.28 | 996.1 | 32.5 | 28.5 | 7.8 | 2.00 | 2.00 | 0.00 |
| 1,000.0 | 9.97 | 41.28 | 997.5 | 32.7 | 28.7 | 7.9 | 0.00 | 0.00 | 0.00 |
| 1,100.0 | 9.97 | 41.28 | 1,096.0 | 45.7 | 40.1 | 11.0 | 0.00 | 0.00 | 0.00 |
| 1,200.0 | 9.97 | 41.28 | 1,194.4 | 58.7 | 51.6 | 14.2 | 0.00 | 0.00 | 0.00 |
| 1,300.0 | 9.97 | 41.28 | 1,292.9 | 71.7 | 63.0 | 17.3 | 0.00 | 0.00 | 0.00 |
| 1,400.0 | 9.97 | 41.28 | 1,391.4 | 84.8 | 74.4 | 20.4 | 0.00 | 0.00 | 0.00 |
| 1,500.0 | 9.97 | 41.28 | 1,489.9 | 97.8 | 85.8 | 23.6 | 0.00 | 0.00 | 0.00 |
| 1,600.0 | 9.97 | 41.28 | 1,588.4 | 110.8 | 97.2 | 26.7 | 0.00 | 0.00 | 0.00 |
| 1,677.8 | 9.97 | 41.28 | 1,665.0 | 120.9 | 106.1 | 29.2 | 0.00 | 0.00 | 0.00 |
| Pictured Cliffs | | | | | | | | | |
| 1,700.0 | 9.97 | 41.28 | 1,686.9 | 123.8 | 108.7 | 29.9 | 0.00 | 0.00 | 0.00 |
| 1,800.0 | 9.97 | 41.28 | 1,785.4 | 136.8 | 120.1 | 33.0 | 0.00 | 0.00 | 0.00 |
| 1,900.0 | 9.97 | 41.28 | 1,883.9 | 149.8 | 131.5 | 36.1 | 0.00 | 0.00 | 0.00 |
| 1,967.1 | 9.97 | 41.28 | 1,950.0 | 158.6 | 139.2 | 38.2 | 0.00 | 0.00 | 0.00 |
| Huerfano Bentonite | | | | | | | | | |
| 2,000.0 | 9.97 | 41.28 | 1,982.4 | 162.8 | 142.9 | 39.3 | 0.00 | 0.00 | 0.00 |
| 2,100.0 | 9.97 | 41.28 | 2,080.8 | 175.9 | 154.4 | 42.4 | 0.00 | 0.00 | 0.00 |
| 2,200.0 | 9.97 | 41.28 | 2,179.3 | 188.9 | 165.8 | 45.6 | 0.00 | 0.00 | 0.00 |
| 2,300.0 | 9.97 | 41.28 | 2,277.8 | 201.9 | 177.2 | 48.7 | 0.00 | 0.00 | 0.00 |
| 2,400.0 | 9.97 | 41.28 | 2,376.3 | 214.9 | 188.6 | 51.8 | 0.00 | 0.00 | 0.00 |
| 2,425.1 | 9.97 | 41.28 | 2,401.0 | 218.2 | 191.5 | 52.6 | 0.00 | 0.00 | 0.00 |
| Mesaverde | | | | | | | | | |
| 2,500.0 | 9.97 | 41.28 | 2,474.8 | 227.9 | 200.1 | 55.0 | 0.00 | 0.00 | 0.00 |
| 2,600.0 | 9.97 | 41.28 | 2,573.3 | 240.9 | 211.5 | 58.1 | 0.00 | 0.00 | 0.00 |
| 2,700.0 | 9.97 | 41.28 | 2,671.8 | 253.9 | 222.9 | 61.3 | 0.00 | 0.00 | 0.00 |
| 2,800.0 | 9.97 | 41.28 | 2,770.3 | 267.0 | 234.3 | 64.4 | 0.00 | 0.00 | 0.00 |
| 2,900.0 | 9.97 | 41.28 | 2,868.8 | 280.0 | 245.8 | 67.5 | 0.00 | 0.00 | 0.00 |
| 3,000.0 | 9.97 | 41.28 | 2,967.3 | 293.0 | 257.2 | 70.7 | 0.00 | 0.00 | 0.00 |
| 3,100.0 | 9.97 | 41.28 | 3,065.7 | 306.0 | 268.6 | 73.8 | 0.00 | 0.00 | 0.00 |
| 3,173.4 | 9.97 | 41.28 | 3,138.0 | 315.5 | 277.0 | 76.1 | 0.00 | 0.00 | 0.00 |
| Menefee | | | | | | | | | |
| 3,200.0 | 9.97 | 41.28 | 3,164.2 | 319.0 | 280.0 | 77.0 | 0.00 | 0.00 | 0.00 |
| 3,300.0 | 9.97 | 41.28 | 3,262.7 | 332.0 | 291.4 | 80.1 | 0.00 | 0.00 | 0.00 |
| 3,400.0 | 9.97 | 41.28 | 3,361.2 | 345.0 | 302.9 | 83.2 | 0.00 | 0.00 | 0.00 |
| 3,500.0 | 9.97 | 41.28 | 3,459.7 | 358.1 | 314.3 | 86.4 | 0.00 | 0.00 | 0.00 |
| 3,600.0 | 9.97 | 41.28 | 3,558.2 | 371.1 | 325.7 | 89.5 | 0.00 | 0.00 | 0.00 |
| 3,700.0 | 9.97 | 41.28 | 3,656.7 | 384.1 | 337.1 | 92.6 | 0.00 | 0.00 | 0.00 |
| 3,800.0 | 9.97 | 41.28 | 3,755.2 | 397.1 | 348.6 | 95.8 | 0.00 | 0.00 | 0.00 |
| 3,900.0 | 9.97 | 41.28 | 3,853.7 | 410.1 | 360.0 | 98.9 | 0.00 | 0.00 | 0.00 |
| 3,921.7 | 9.97 | 41.28 | 3,875.0 | 412.9 | 362.5 | 99.6 | 0.00 | 0.00 | 0.00 |
| Point Lookout | | | | | | | | | |
| 3,956.6 | 9.97 | 41.28 | 3,909.4 | 417.5 | 366.5 | 100.7 | 0.00 | 0.00 | 0.00 |



EOG Resources
Planning Report

| | | | |
|------------------|-------------------------|-------------------------------------|--------------------------------|
| Database: | EDM | Local Co-ordinate Reference: | Well Bullitt 6 Fed #607H |
| Company: | EOG Resources - Artesia | TVD Reference: | KB @ 7084.0usft (Planning Rig) |
| Project: | Sandoval County (NAD83) | MD Reference: | KB @ 7084.0usft (Planning Rig) |
| Site: | Bullitt | North Reference: | Grid |
| Well: | Bullitt 6 Fed #607H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Lateral | | |
| Design: | Plan #1 | | |

| Planned Survey | | | | | | | | | | |
|---|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | |
| 4,000.0 | 9.10 | 41.28 | 3,952.2 | 422.9 | 371.2 | 102.0 | 2.00 | -2.00 | 0.00 | |
| 4,077.6 | 7.55 | 41.28 | 4,029.0 | 431.3 | 378.6 | 104.0 | 2.00 | -2.00 | 0.00 | |
| Mancos | | | | | | | | | | |
| 4,100.0 | 7.10 | 41.28 | 4,051.2 | 433.5 | 380.5 | 104.6 | 2.00 | -2.00 | 0.00 | |
| 4,200.0 | 5.10 | 41.28 | 4,150.6 | 441.5 | 387.5 | 106.5 | 2.00 | -2.00 | 0.00 | |
| 4,300.0 | 3.10 | 41.28 | 4,250.4 | 446.8 | 392.2 | 107.8 | 2.00 | -2.00 | 0.00 | |
| 4,400.0 | 1.10 | 41.28 | 4,350.3 | 449.6 | 394.6 | 108.5 | 2.00 | -2.00 | 0.00 | |
| 4,455.2 | 0.00 | 41.28 | 4,405.5 | 450.0 | 395.0 | 108.5 | 2.00 | -2.00 | 0.00 | |
| KOP 12°/100' | | | | | | | | | | |
| 4,475.0 | 2.37 | 315.00 | 4,425.3 | 450.3 | 394.7 | 109.0 | 11.99 | 11.99 | -435.74 | |
| 4,500.0 | 5.37 | 315.00 | 4,450.2 | 451.5 | 393.5 | 110.6 | 12.00 | 12.00 | 0.00 | |
| 4,525.0 | 8.37 | 315.00 | 4,475.0 | 453.6 | 391.4 | 113.6 | 12.00 | 12.00 | 0.00 | |
| 4,550.0 | 11.37 | 315.00 | 4,499.7 | 456.6 | 388.4 | 117.9 | 12.00 | 12.00 | 0.00 | |
| 4,575.0 | 14.37 | 315.00 | 4,524.0 | 460.6 | 384.4 | 123.4 | 12.00 | 12.00 | 0.00 | |
| 4,600.0 | 17.37 | 315.00 | 4,548.1 | 465.4 | 379.6 | 130.2 | 12.00 | 12.00 | 0.00 | |
| 4,625.0 | 20.37 | 315.00 | 4,571.7 | 471.1 | 373.9 | 138.2 | 12.00 | 12.00 | 0.00 | |
| 4,640.3 | 22.21 | 315.00 | 4,586.0 | 475.1 | 369.9 | 143.7 | 12.00 | 12.00 | 0.00 | |
| Gallup | | | | | | | | | | |
| 4,650.0 | 23.37 | 315.00 | 4,594.9 | 477.7 | 367.3 | 147.5 | 12.00 | 12.00 | 0.00 | |
| 4,675.0 | 26.37 | 315.00 | 4,617.6 | 485.1 | 359.9 | 157.9 | 12.00 | 12.00 | 0.00 | |
| 4,700.0 | 29.37 | 315.00 | 4,639.7 | 493.4 | 351.6 | 169.5 | 12.00 | 12.00 | 0.00 | |
| 4,725.0 | 32.37 | 315.00 | 4,661.2 | 502.5 | 342.5 | 182.3 | 12.00 | 12.00 | 0.00 | |
| 4,750.0 | 35.37 | 315.00 | 4,681.9 | 512.3 | 332.7 | 196.1 | 12.00 | 12.00 | 0.00 | |
| 4,775.0 | 38.37 | 315.00 | 4,701.9 | 522.9 | 322.1 | 211.0 | 12.00 | 12.00 | 0.00 | |
| 4,800.0 | 41.37 | 315.00 | 4,721.1 | 534.3 | 310.7 | 226.9 | 12.00 | 12.00 | 0.00 | |
| 4,825.0 | 44.37 | 315.00 | 4,739.4 | 546.3 | 298.7 | 243.8 | 12.00 | 12.00 | 0.00 | |
| 4,850.0 | 47.37 | 315.00 | 4,756.8 | 559.0 | 286.0 | 261.6 | 12.00 | 12.00 | 0.00 | |
| 4,875.0 | 50.37 | 315.00 | 4,773.3 | 572.3 | 272.7 | 280.3 | 12.00 | 12.00 | 0.00 | |
| 4,900.0 | 53.37 | 315.00 | 4,788.7 | 586.2 | 258.8 | 299.8 | 12.00 | 12.00 | 0.00 | |
| 4,925.0 | 56.37 | 315.00 | 4,803.1 | 600.7 | 244.3 | 320.1 | 12.00 | 12.00 | 0.00 | |
| 4,950.0 | 59.37 | 315.00 | 4,816.4 | 615.6 | 229.4 | 341.2 | 12.00 | 12.00 | 0.00 | |
| 4,975.0 | 62.37 | 315.00 | 4,828.5 | 631.1 | 213.9 | 362.9 | 12.00 | 12.00 | 0.00 | |
| 5,000.0 | 65.37 | 315.00 | 4,839.5 | 646.9 | 198.1 | 385.1 | 12.00 | 12.00 | 0.00 | |
| 5,025.0 | 68.37 | 315.00 | 4,849.4 | 663.2 | 181.8 | 408.0 | 12.00 | 12.00 | 0.00 | |
| 5,050.0 | 71.37 | 315.00 | 4,858.0 | 679.8 | 165.2 | 431.3 | 12.00 | 12.00 | 0.00 | |
| 5,075.0 | 74.37 | 315.00 | 4,865.3 | 696.7 | 148.3 | 455.0 | 12.00 | 12.00 | 0.00 | |
| 5,100.0 | 77.37 | 315.00 | 4,871.4 | 713.8 | 131.2 | 479.1 | 12.00 | 12.00 | 0.00 | |
| 5,125.0 | 80.37 | 315.00 | 4,876.2 | 731.2 | 113.8 | 503.4 | 12.00 | 12.00 | 0.00 | |
| 5,150.0 | 83.37 | 315.00 | 4,879.8 | 748.7 | 96.3 | 528.0 | 12.00 | 12.00 | 0.00 | |
| 5,175.0 | 86.37 | 315.00 | 4,882.0 | 766.3 | 78.7 | 552.7 | 12.00 | 12.00 | 0.00 | |
| 5,200.0 | 89.37 | 315.00 | 4,882.9 | 783.9 | 61.1 | 577.6 | 12.00 | 12.00 | 0.00 | |
| 5,205.2 | 90.00 | 315.00 | 4,883.0 | 787.6 | 57.4 | 582.7 | 12.00 | 12.00 | 0.00 | |
| [B6F#607H]EOC 5205' MD (4883' TVD) | | | | | | | | | | |
| 5,300.0 | 90.00 | 315.00 | 4,883.0 | 854.6 | -9.6 | 676.9 | 0.00 | 0.00 | 0.00 | |
| 5,400.0 | 90.00 | 315.00 | 4,883.0 | 925.4 | -80.4 | 776.2 | 0.00 | 0.00 | 0.00 | |
| 5,500.0 | 90.00 | 315.00 | 4,883.0 | 996.1 | -151.1 | 875.5 | 0.00 | 0.00 | 0.00 | |
| 5,600.0 | 90.00 | 315.00 | 4,883.0 | 1,066.8 | -221.8 | 974.8 | 0.00 | 0.00 | 0.00 | |
| 5,700.0 | 90.00 | 315.00 | 4,883.0 | 1,137.5 | -292.5 | 1,074.1 | 0.00 | 0.00 | 0.00 | |
| 5,800.0 | 90.00 | 315.00 | 4,883.0 | 1,208.2 | -363.2 | 1,173.4 | 0.00 | 0.00 | 0.00 | |
| 5,900.0 | 90.00 | 315.00 | 4,883.0 | 1,278.9 | -433.9 | 1,272.7 | 0.00 | 0.00 | 0.00 | |
| 6,000.0 | 90.00 | 315.00 | 4,883.0 | 1,349.6 | -504.6 | 1,372.1 | 0.00 | 0.00 | 0.00 | |
| 6,100.0 | 90.00 | 315.00 | 4,883.0 | 1,420.3 | -575.3 | 1,471.4 | 0.00 | 0.00 | 0.00 | |
| 6,200.0 | 90.00 | 315.00 | 4,883.0 | 1,491.0 | -646.0 | 1,570.7 | 0.00 | 0.00 | 0.00 | |



EOG Resources
Planning Report

| | | | |
|------------------|-------------------------|-------------------------------------|--------------------------------|
| Database: | EDM | Local Co-ordinate Reference: | Well Bullitt 6 Fed #607H |
| Company: | EOG Resources - Artesia | TVD Reference: | KB @ 7084.0usft (Planning Rig) |
| Project: | Sandoval County (NAD83) | MD Reference: | KB @ 7084.0usft (Planning Rig) |
| Site: | Bullitt | North Reference: | Grid |
| Well: | Bullitt 6 Fed #607H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Lateral | | |
| Design: | Plan #1 | | |

| Planned Survey | | | | | | | | | | |
|------------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | |
| 6,300.0 | 90.00 | 315.00 | 4,883.0 | 1,561.8 | -716.8 | 1,670.0 | 0.00 | 0.00 | 0.00 | |
| 6,400.0 | 90.00 | 315.00 | 4,883.0 | 1,632.5 | -787.5 | 1,769.3 | 0.00 | 0.00 | 0.00 | |
| 6,500.0 | 90.00 | 315.00 | 4,883.0 | 1,703.2 | -858.2 | 1,868.6 | 0.00 | 0.00 | 0.00 | |
| 6,600.0 | 90.00 | 315.00 | 4,883.0 | 1,773.9 | -928.9 | 1,967.9 | 0.00 | 0.00 | 0.00 | |
| 6,700.0 | 90.00 | 315.00 | 4,883.0 | 1,844.6 | -999.6 | 2,067.2 | 0.00 | 0.00 | 0.00 | |
| 6,800.0 | 90.00 | 315.00 | 4,883.0 | 1,915.3 | -1,070.3 | 2,166.6 | 0.00 | 0.00 | 0.00 | |
| 6,900.0 | 90.00 | 315.00 | 4,883.0 | 1,986.0 | -1,141.0 | 2,265.9 | 0.00 | 0.00 | 0.00 | |
| 7,000.0 | 90.00 | 315.00 | 4,883.0 | 2,056.7 | -1,211.7 | 2,365.2 | 0.00 | 0.00 | 0.00 | |
| 7,100.0 | 90.00 | 315.00 | 4,883.0 | 2,127.4 | -1,282.4 | 2,464.5 | 0.00 | 0.00 | 0.00 | |
| 7,200.0 | 90.00 | 315.00 | 4,883.0 | 2,198.1 | -1,353.1 | 2,563.8 | 0.00 | 0.00 | 0.00 | |
| 7,300.0 | 90.00 | 315.00 | 4,883.0 | 2,268.9 | -1,423.9 | 2,663.1 | 0.00 | 0.00 | 0.00 | |
| 7,400.0 | 90.00 | 315.00 | 4,883.0 | 2,339.6 | -1,494.6 | 2,762.4 | 0.00 | 0.00 | 0.00 | |
| 7,500.0 | 90.00 | 315.00 | 4,883.0 | 2,410.3 | -1,565.3 | 2,861.8 | 0.00 | 0.00 | 0.00 | |
| 7,600.0 | 90.00 | 315.00 | 4,883.0 | 2,481.0 | -1,636.0 | 2,961.1 | 0.00 | 0.00 | 0.00 | |
| 7,700.0 | 90.00 | 315.00 | 4,883.0 | 2,551.7 | -1,706.7 | 3,060.4 | 0.00 | 0.00 | 0.00 | |
| 7,800.0 | 90.00 | 315.00 | 4,883.0 | 2,622.4 | -1,777.4 | 3,159.7 | 0.00 | 0.00 | 0.00 | |
| 7,900.0 | 90.00 | 315.00 | 4,883.0 | 2,693.1 | -1,848.1 | 3,259.0 | 0.00 | 0.00 | 0.00 | |
| 8,000.0 | 90.00 | 315.00 | 4,883.0 | 2,763.8 | -1,918.8 | 3,358.3 | 0.00 | 0.00 | 0.00 | |
| 8,100.0 | 90.00 | 315.00 | 4,883.0 | 2,834.5 | -1,989.5 | 3,457.6 | 0.00 | 0.00 | 0.00 | |
| 8,200.0 | 90.00 | 315.00 | 4,883.0 | 2,905.3 | -2,060.3 | 3,556.9 | 0.00 | 0.00 | 0.00 | |
| 8,300.0 | 90.00 | 315.00 | 4,883.0 | 2,976.0 | -2,131.0 | 3,656.3 | 0.00 | 0.00 | 0.00 | |
| 8,400.0 | 90.00 | 315.00 | 4,883.0 | 3,046.7 | -2,201.7 | 3,755.6 | 0.00 | 0.00 | 0.00 | |
| 8,500.0 | 90.00 | 315.00 | 4,883.0 | 3,117.4 | -2,272.4 | 3,854.9 | 0.00 | 0.00 | 0.00 | |
| 8,600.0 | 90.00 | 315.00 | 4,883.0 | 3,188.1 | -2,343.1 | 3,954.2 | 0.00 | 0.00 | 0.00 | |
| 8,700.0 | 90.00 | 315.00 | 4,883.0 | 3,258.8 | -2,413.8 | 4,053.5 | 0.00 | 0.00 | 0.00 | |
| 8,800.0 | 90.00 | 315.00 | 4,883.0 | 3,329.5 | -2,484.5 | 4,152.8 | 0.00 | 0.00 | 0.00 | |
| 8,900.0 | 90.00 | 315.00 | 4,883.0 | 3,400.2 | -2,555.2 | 4,252.1 | 0.00 | 0.00 | 0.00 | |
| 9,000.0 | 90.00 | 315.00 | 4,883.0 | 3,470.9 | -2,625.9 | 4,351.4 | 0.00 | 0.00 | 0.00 | |
| 9,100.0 | 90.00 | 315.00 | 4,883.0 | 3,541.6 | -2,696.6 | 4,450.8 | 0.00 | 0.00 | 0.00 | |
| 9,200.0 | 90.00 | 315.00 | 4,883.0 | 3,612.4 | -2,767.4 | 4,550.1 | 0.00 | 0.00 | 0.00 | |
| 9,300.0 | 90.00 | 315.00 | 4,883.0 | 3,683.1 | -2,838.1 | 4,649.4 | 0.00 | 0.00 | 0.00 | |
| 9,400.0 | 90.00 | 315.00 | 4,883.0 | 3,753.8 | -2,908.8 | 4,748.7 | 0.00 | 0.00 | 0.00 | |
| 9,500.0 | 90.00 | 315.00 | 4,883.0 | 3,824.5 | -2,979.5 | 4,848.0 | 0.00 | 0.00 | 0.00 | |
| 9,600.0 | 90.00 | 315.00 | 4,883.0 | 3,895.2 | -3,050.2 | 4,947.3 | 0.00 | 0.00 | 0.00 | |
| 9,700.0 | 90.00 | 315.00 | 4,883.0 | 3,965.9 | -3,120.9 | 5,046.6 | 0.00 | 0.00 | 0.00 | |
| 9,759.5 | 90.00 | 315.00 | 4,883.0 | 4,008.0 | -3,163.0 | 5,105.7 | 0.00 | 0.00 | 0.00 | |
| [B6F#607H]EOL 9760' MD (4883' TVD) | | | | | | | | | | |

| Design Targets | | | | | | | | | | |
|--|---------------|--------------|------------|--------------|--------------|-----------------|----------------|-----------------|-------------------|--|
| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | Longitude | |
| [B6F#607H]FTP - hit/miss target - Shape | 0.00 | 360.00 | 4,883.0 | 788.0 | 57.0 | 1,848,558.00 | 1,328,990.00 | 36° 4' 33.033 N | 107° 18' 13.977 W | |
| [B6F#607H]PBHL - plan hits target center - Point | 0.00 | 360.00 | 4,883.0 | 4,008.0 | -3,163.0 | 1,851,778.00 | 1,325,770.00 | 36° 5' 4.526 N | 107° 18' 53.629 W | |



EOG Resources
Planning Report

| | | | |
|------------------|-------------------------|-------------------------------------|--------------------------------|
| Database: | EDM | Local Co-ordinate Reference: | Well Bullitt 6 Fed #607H |
| Company: | EOG Resources - Artesia | TVD Reference: | KB @ 7084.0usft (Planning Rig) |
| Project: | Sandoval County (NAD83) | MD Reference: | KB @ 7084.0usft (Planning Rig) |
| Site: | Bullitt | North Reference: | Grid |
| Well: | Bullitt 6 Fed #607H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Lateral | | |
| Design: | Plan #1 | | |

| Formations | | | | | |
|-----------------------|-----------------------|----------------------|-----------|---------|-------------------|
| Measured Depth (usft) | Vertical Depth (usft) | Name | Lithology | Dip (°) | Dip Direction (°) |
| 1,677.8 | 1,665.0 | Pictured Cliffs | | | |
| 1,967.1 | 1,950.0 | Huerfanito Bentonite | | | |
| 2,425.1 | 2,401.0 | Mesaverde | | | |
| 3,173.4 | 3,138.0 | Menefee | | | |
| 3,921.7 | 3,875.0 | Point Lookout | | | |
| 4,077.6 | 4,029.0 | Mancos | | | |
| 4,640.3 | 4,586.0 | Gallup | | | |

| Plan Annotations | | | | | |
|-----------------------|-----------------------|-------------------|--------------|------------------------------------|--|
| Measured Depth (usft) | Vertical Depth (usft) | Local Coordinates | | Comment | |
| | | +N/-S (usft) | +E/-W (usft) | | |
| 500.0 | 500.0 | 0.0 | 0.0 | BEGIN 2*/100 | |
| 4,455.2 | 4,405.5 | 450.0 | 395.0 | KOP 12*/100' | |
| 5,205.2 | 4,883.0 | 787.6 | 57.4 | [B6F#607H]EOC 5205' MD (4883' TVD) | |
| 9,759.5 | 4,883.0 | 4,008.0 | -3,163.0 | [B6F#607H]EOL 9760' MD (4883' TVD) | |



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Farmington District Office
6251 College Blvd, Suite A
Farmington, New Mexico 87402

In Reply Refer To:
3162.3-1(NMF0110)

EOG Resources Incorporated
#607H Bullitt 06 Fed
Lease: NMNM139386 Unit:
SH: SW¹/₄SW¹/₄ Section 6, T.21 N., R.4 W.
BH: NW¹/₄NE¹/₄ Section 1, T.21 N., R.5 W.
Sandoval County, New Mexico

***Above Data Required on Well Sign**

GENERAL REQUIREMENTS FOR OIL AND GAS OPERATIONS ON FEDERAL AND INDIAN LEASES

The following special requirements apply and are effective when checked:

- A. Note all surface/drilling conditions of approval attached.
- B. The required wait on cement (WOC) time will be a minimum of 500 psi compressive strength at 60 degrees. Blowout preventor (BOP) nipple-up operations may then be initiated
- C. Test the surface casing to a minimum of _____ psi for 30 minutes.
- D. Test all casing strings below the surface casing to .22 psi/ft. of casing string length or 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield burst) for a minimum of 30 minutes.
- E. Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the Bureau of Land Management, Farmington District Office, Branch of Reservoir Management, 6251 College Blvd. Suite A, Farmington, New Mexico 87402. The effective date of the agreement must be **prior** to any sales.
- F. The use of co-flex hose is authorized contingent upon the following:

INTERIOR REGION 7 • UPPER COLORADO BASIN

COLORADO, NEW MEXICO, UTAH, WYOMING

1. From the BOP to the choke manifold: the co-flex hose must be hobbled on both ends and saddle to prevent whip.
2. From the choke manifold to the discharge tank: the co-flex hoses must be as straight as practical, hobbled on both ends and anchored to prevent whip.
3. The co-flex hose pressure rating must be at least commensurate with approved BOPE.

I. GENERAL

- A. Full compliance with all applicable laws, regulations, and Onshore Orders, with the approved Permit to drill, and with the approved Surface Use and Operations Plan is required. Lessees and/or operators are fully accountable for the actions of their contractors and subcontractors. Failure to comply with these requirements and the filing of required reports will result in strict enforcement pursuant to 43 CFR 3163.1 or 3163.2.
- B. Each well shall have a well sign in legible condition from spud date to final abandonment. The sign should show the operator's name, lease serial number, or unit name, well number, location of the well, and whether lease is Tribal or Allotted, (See 43 CFR 3162.6(b)).
- C. A complete copy of the approved Application for Permit to Drill, along with any conditions of approval, shall be available to authorized personnel at the drill site whenever active drilling operations are under way.
- D. For Wildcat wells only, a drilling operations progress report is to be submitted, to the BLM-Field Office, weekly from the spud date until the well is completed and the Well Completion Report (Form 3160-4) is filed. The report should be on 8-1/2 x 11 inch paper, and each page should identify the well by; operator's name, well number, location and lease number.
- E. As soon as practical, notice is required of all blowouts, fires and accidents involving life-threatening injuries or loss of life. (See NTL-3A).
- F. Prior approval by the BLM-Authorized Office (Drilling and Production Section) is required for variance from the approved drilling program and before commencing plugging operations, plug back work casing repair work, corrective cementing operations, or suspending drilling operations indefinitely. Emergency approval may be obtained orally, but such approval is contingent upon filing of a notice of intent (on a Sundry Notice, Form 3160-5) within three business days (original and three copies of Federal leases and an original and four copies on Indian leases). **Any changes to the approved plan or any questions regarding drilling operations should be directed to BLM during regular business hours at 505-564-7600. Emergency program changes after hours should be directed to at Virgil Lucero at 505-793-1836.**
- G. **The Inspection and Enforcement Section (I&E), phone number (505-564-7750) is to be notified at least 24 hours in advance of BOP test, spudding, cementing, or plugging operations so that a BLM representative may witness the operations.**
- H. Unless drilling operations are commenced within two years, approval of the Application for Permit to Drill will expire. A written request for a two years extension may be granted if submitted prior to expiration.

- I. From the time drilling operations are initiated and until drilling operations are completed, a member of the drilling crew or the tool pusher shall maintain rig surveillance at all time, unless the well is secured with blowout preventers or cement plugs.
- J. If for any reason, drilling operations are suspended for more than 90 days, a written notice must be provided to this office outlining your plans for this well.

II. REPORTING REQUIREMENTS

A. For reporting purposes, all well Sundry notices, well completion and other well actions shall be referenced by the appropriate lease, communitization agreement and/or unit agreement numbers.

B. The following reports shall be filed with the BLM-Authorized Officer within 30 days after the work is completed.

1. Original and three copies on Federal and an Original and five copies on Indian leases of Sundry Notice (Form 3150-5), giving complete information concerning.

- a. Setting of each string of casing. Show size and depth of hole, grade and weight of casing, depth set, depth of any and all cementing tools that are used, amount (in cubic feet) and types of cement used, whether cement circulated to surface and all cement tops in the casing annulus, casing test method and results, and the date work was done. Show spud date on first report submitted.
 - b. Intervals tested, perforated (include; size, number and location of perforations), acidized, or fractured; and results obtained. Provide date work was done on well completion report and completion sundry notice.
 - c. Subsequent Report of Abandonment, show the manner in which the well was plugged, including depths where casing was cut and pulled, intervals (by depths) where cement plugs were replaced, and dates of the operations.
2. Well Completion Report (Form 3160-4) will be submitted with 30 days after well has been completed.
- a. Initial Bottom Hole Pressure (BHP) for the producing formations. Show the BHP on the completion report. The pressure may be: 1) measured with a bottom hole bomb, or; 2) calculated based on shut in surface pressures (minimum seven day buildup) and fluid level shot.
3. Submit a cement evaluation log, if cement is not circulated to surface.

III. DRILLER'S LOG

The following shall be entered in the daily driller's log: 1) Blowout preventer pressures tests, including test pressures and results. 2) Blowout preventer tests for proper functioning, 3) Blowout prevention drills conducted, 4) Casing run, including size, grade, weight, and depth set, 5) How pipe was cemented, including amount of cement, type, whether cement circulated to surface, location of cementing tools, etc., 6) Waiting on cement time for each casing string, 7) Casing pressure tests after

cementing, including test pressure and results and 8) Estimated amounts of oil and gas recovered and/or produced during drill stem test.

IV. GAS FLARING

Gas produced from this well may not be vented or flared beyond an initial, authorized test period of *** Days** or 50 MMCF following its (completion)(recompletion), whichever first occurs, without the prior, written approval of the authorized officer. Should gas be vented or flared without approval beyond the test period authorized above, you may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted. You shall be required to compensate the lessor for the portion of the gas vented or flared without approval which is determined to have been avoidably lost.

***30 days**, unless a longer test period is specifically approved by the authorized officer. The 30-day period will commence upon the first gas to surface.

V. SAFETY

- A. All rig heating stoves are to be of the explosion-proof type.
- B. Rig safety lines are to be installed.
- C. Hard hats and other Personal Protective Equipment (PPE) must be utilized.

VI. CHANGE OF PLANS OR ABANDONMENT

- A. Any changes of plans required in order to mitigate unanticipated conditions encountered during drilling operations, will require approval as set forth in Section 1.F.
- B. If the well is dry, it is to be plugged in accordance with 43 CFR 3162.3-4, approval of the proposed plugging program is required as set forth in Section 1.F. The report should show the total depth reached, the reason for plugging, and the proposed intervals, by depths, where cement plugs are to be placed, type of plugging mud, etc. A Subsequent Report of Abandonment is required as set forth in Section II.B.1c.
- C. Unless a well has been properly cased and cemented, or properly plugged, the drilling rig must not be moved from the drill site without prior approval from the BLM-Authorized Officer.

VII. PHONE NUMBERS

- A. **For BOPE tests, cementing, and plugging operations the phone number is 505-564-7750 and must be called 24 hours in advance in order that a BLM representative may witness the operations.**
- B. Emergency program changes after hours contact:

Virgil Lucero (505) 793-1836

EXHIBIT 1a
EOG Resources, Inc.
3M Choke Manifold Equipment


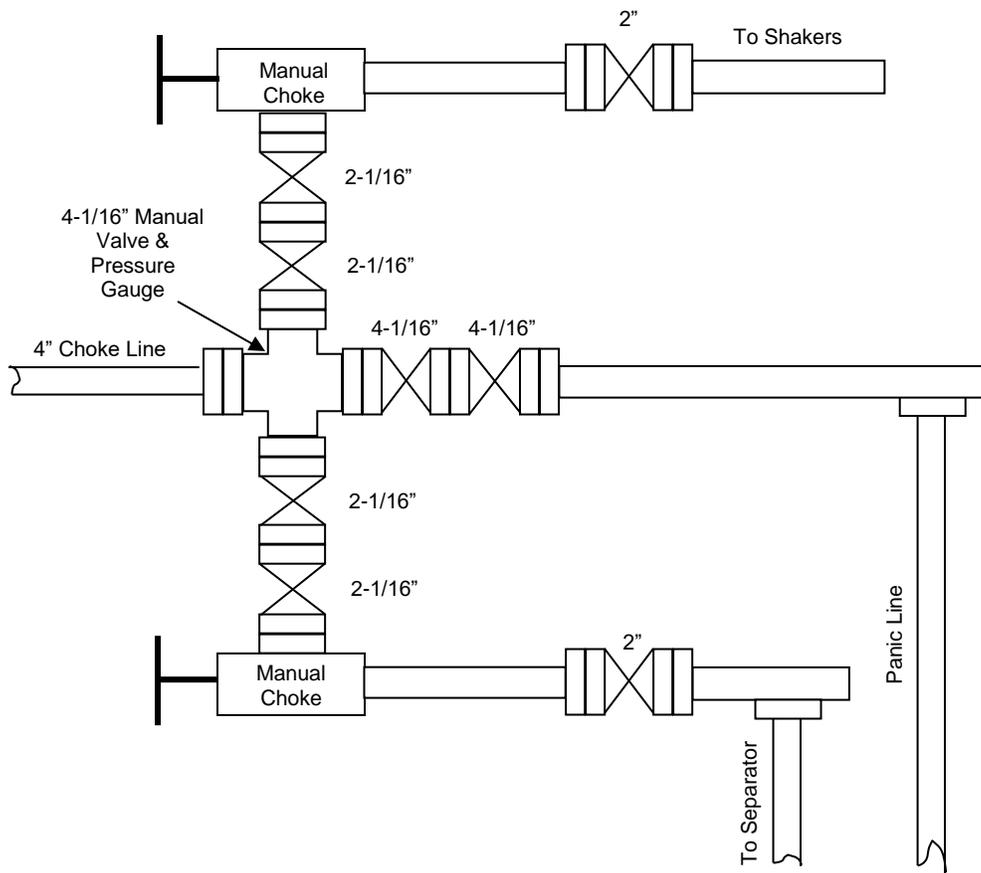


EXHIBIT 1

EOG Resources
3000 PSI BOPE

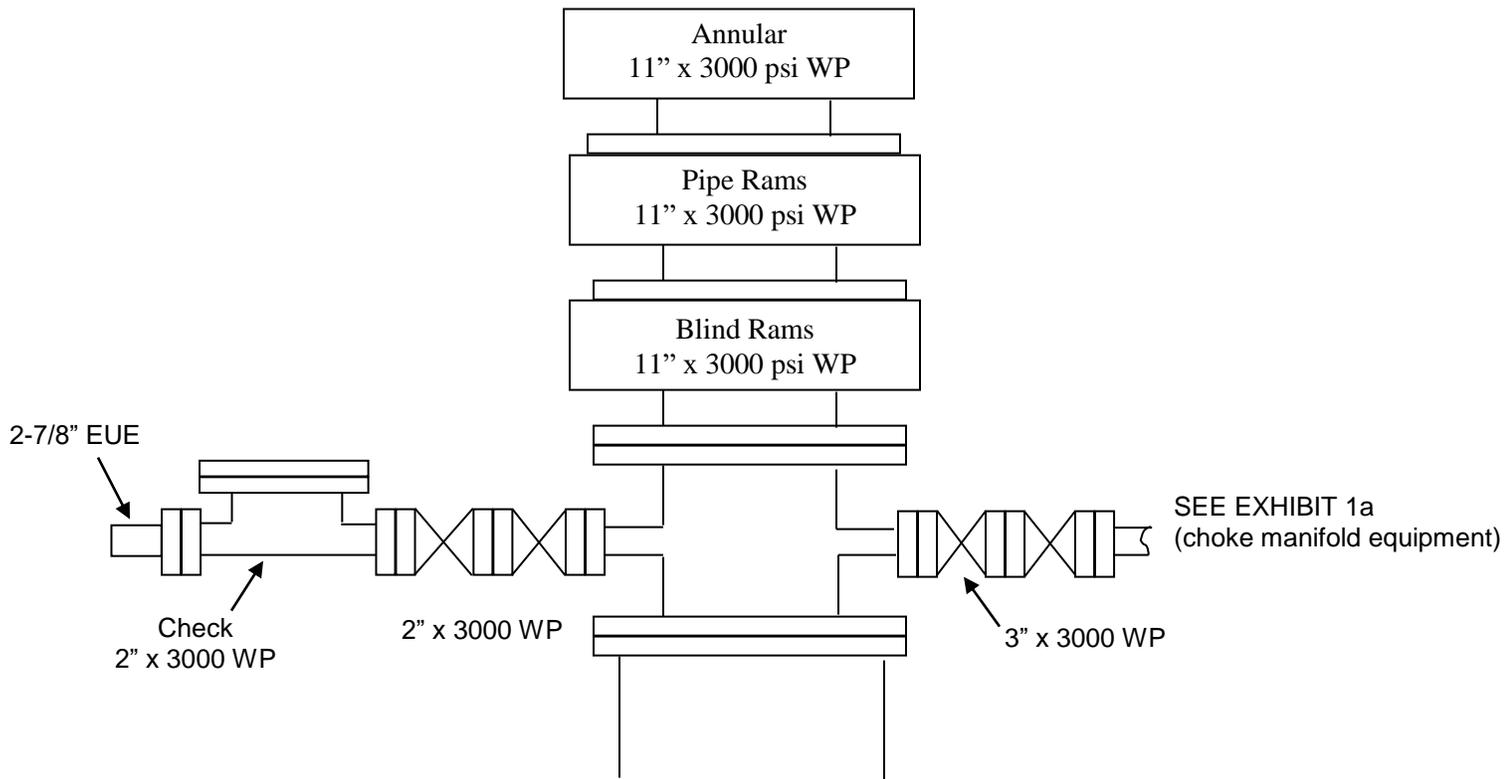

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 12946

COMMENTS

| | | | | | |
|---|--------------------------|--------------|----------------|-------------------------|-----------------------------|
| Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX79702 | | | OGRID: 7377 | Action Number: 12946 | Action Type: FORM 3160-3 |
| Created By | Comment | Comment Date | | | |
| kpickford | KP GEO Review 12/23/2020 | 12/23/2020 | | | |

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720
District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 12946

CONDITIONS OF APPROVAL

| | | | | | |
|--------------------------------|---------------|------------------|----------------|-------------------------|-----------------------------|
| Operator: EOG RESOURCES INC | P.O. Box 2267 | Midland, TX79702 | OGRID: 7377 | Action Number: 12946 | Action Type: FORM 3160-3 |
|--------------------------------|---------------|------------------|----------------|-------------------------|-----------------------------|

| OCD Reviewer | Condition |
|--------------|---|
| kpickford | Notify OCD 24 hours prior to casing & cement |
| kpickford | Will require a directional survey with the C-104 |
| kpickford | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system |
| kpickford | Surface casing is required to go to 320'. |