

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address XTO Energy Inc. 6401 Holiday Hill Rd., Bldg 5 Midland, TX 79707		² OGRID Number 005380
		³ Reason for Filing Code/ Effective Date New Well
⁴ API Number 30 – 015-46301	⁵ Pool Name FORTY-NINER; BONE SPRING	
⁶ Pool Code 96526		
⁷ Property Code 317790	⁸ Property Name REMUDA NORTH 25 STATE	⁹ Well Number 908H

II. ¹⁰ Surface Location

UL or lot no. I	Section 25	Township 23S	Range 29E	Lot Idn	Feet from the 2379	North/South Line South	Feet from the 615	East/West line East	County Eddy
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------

¹¹ Bottom Hole Location

UL or lot no. A	Section 24	Township 23S	Range 29E	Lot Idn	Feet from the 216	North/South line North	Feet from the 747	East/West line East	County Eddy
¹² Lse Code S	¹³ Producing Method Code p	¹⁴ Gas Connection Date	¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date		

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
34053	Plains Marketing LP	O
372787	Versa Enterprises LLC	O
248440	Western Refining	O
005380	XTO Energy	G

IV. Well Completion Data

²¹ Spud Date 10/17/19	²² Ready Date 04/14/2020	²³ TD 17771	²⁴ PBDT 17763	²⁵ Perforations 12539-12964, 13571-13734 15155-15266, 15665-17627	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	
20		16		364	
14.75		11.75		3227	
10.625		8.625		9546	
7.875		5.5		17765	
		2.875		9695	

V. Well Test Data

³¹ Date New Oil 04/15/2020	³² Gas Delivery Date 04/14/20	³³ Test Date 05/16/20	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure 209	³⁶ Csg. Pressure 1038
³⁷ Choke Size	³⁸ Oil 839	³⁹ Water 2607	⁴⁰ Gas 1574		⁴¹ Test Method Gas lift
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: Cheryl Rowell			OIL CONSERVATION DIVISION		
Printed name: CHERYL ROWELL			Approved by: John Garcia		
Title: REGULATORY COORDINATOR			Title: Petroleum Specialist		
E-mail Address: CHERYL_ROWELL@XTOENERGY.COM			Approval Date: 2 / 2 4 / 2 0 2 1		
Date: 02/24/2021		Phone: 432-218-3754			

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT AS-DRILLED PLAT

¹ API Number 30-015-46301	² Pool Code 96526	³ Pool Name Forty-Niner Ridge; Bone Spring
⁴ Property Code 317790	⁵ Property Name REMUDA NORTH 25 STATE	
⁷ OGRID No. 005380	⁸ Operator Name XTO ENERGY, INC.	⁶ Well Number 908H
		⁹ Elevation 3,076'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	25	23 S	29 E		2,379	SOUTH	615	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	24	23 S	29 E		216	NORTH	747	EAST	EDDY

¹² Dedicated Acres 240	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NOTE: AS-DRILLED BOTTOM HOLE PLOTTED FROM

NOTE: AS-DRILLED BOTTOM HOLE PLOTTED FROM
DATA FURNISHED BY XTO ENERGY

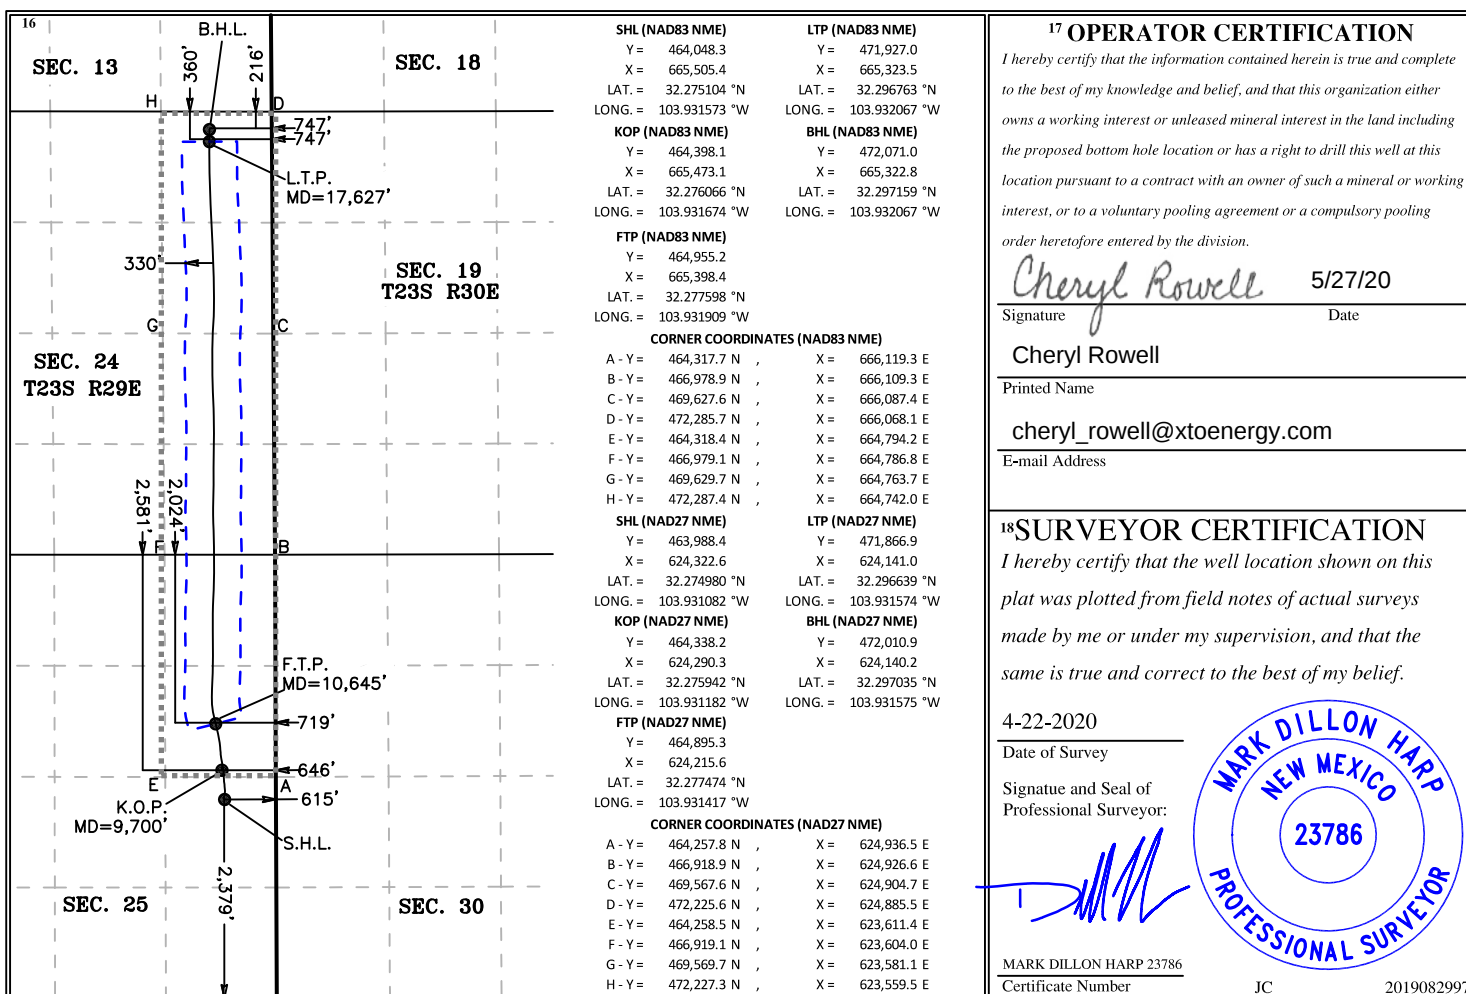

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018



January 28, 2020

New Mexico Energy, Minerals and Natural Resources Department
Attn: Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505

Attn: Colin Gilmore

Re: XTO Energy Inc.
Remuda North 25 State #908H
Culebra Bluff, Bone Spring, South
Eddy County, New Mexico
API# 30-015-46301

Enclosed please find the original and one (1) copy of the survey performed on the reference well by STRYKER ENERGY DIRECTIONAL SERVICES, LLC. (P-5 #828149) Other information required by your office is as follows:

<u>Name & Title</u>	<u>Drainhole No.</u>	<u>Survey Depths</u>	<u>Dates Performed</u>	<u>Type Survey</u>
Cliff Bray	Original Hole	151ft. to 17,726ft.	10-17-19 to 11-10-19	MWD Survey

A certified plat on which the bottom-hole location is oriented to both surface location and to the lease lines (or unit lines in case of pooling) is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

A handwritten signature in black ink, appearing to read "Eric Estes", is written over a horizontal line.

Eric Estes

Enclosures

CC:

XTO Energy Inc.
Attn: Colin Gilmore
6401 Holiday Hill Rd. #5
Midland, Texas 79707

NMEMaNRD\ XTO Energy Inc.\Remuda North 25 State #908HM191198

STRYKER ENERGY DIRECTIONAL SERVICES, LLC.
P.O. Box 1250

Montgomery, TX 77356

Office (936) 582-7296 * Fax (936)-588-4163



January 28, 2020

Survey Certification Report

STATE OF TEXAS

COUNTY OF Montgomery

I, Eric Estes, certify that I am employed by STRYKER ENERGY DIRECTIONAL SERVICES, L.L.C., and that I did on the day(s) of October 17, 2019 through November 10, 2019, conduct or supervise the taking of a SEDS MWD Original Hole Survey from a depth of 151 feet to a depth of 17,726 feet; that I am authorized and qualified to make this report; that this survey was conducted at the request of XTO Energy Inc., for the Remuda North 25 State #908H well, API #30-015-46301 in Eddy County, New Mexico; and that I have reviewed this report and find that it conforms to the principles as set forth by STRYKER ENERGY DIRECTIONAL SERVICES, L.L.C..

Eric Estes

STRYKER ENERGY DIRECTIONAL SERVICES, L.L.C.

STRYKER ENERGY DIRECTIONAL SERVICES, LLC.

P.O. Box 1250

Montgomery, TX 77356

Office (936) 582-7296 * Fax (936)-588-4163

Searches

Operator Data

Hearing Fee Application

OCD Permitting

Home Searches Wells Well Details

30-015-46301 REMUDA NORTH 25 STATE #908H [317790]

General Well Information

Operator: [5380] XTO ENERGY, INC
 Status: New Direction: Horizontal
 Well Type: Oil Multi-Lateral: No
 Work Type: New Mineral Owner: State
 Surface Owner:
 Surface Location: I-25-23S-29E 2379 FSL 615 FEL
 Lat/Long: 32.275104,-103.931573 NAD83
 GL Elevation: 3076
 KB Elevation:
 DF Elevation: Sing/Mult Compl: Single
 Potash Waiver: False

Proposed Formation and/or Notes

3RD BONE SPRING SAND

Depths

Proposed: 17772 True Vertical Depth: 0
 Measured Vertical Depth: 0 Plugback Measured: 0

Formation Tops

Formation	Top	Producing	Method Obtained
-----------	-----	-----------	-----------------

Event Dates

Initial APD Approval: 09/24/2019
 Most Recent APD Approval: 09/26/2019 Current APD Expiration: 09/26/2021
 APD Cancellation:
 APD Extension Approval:
 Spud: Gas Capture Plan Received: 09/24/2019
 Approved Temporary TA Expiration:
 Abandonment:
 Shut In:
 Plug and Abandoned Intent PNR Expiration:
 Received: Last MIT/BHT: 11/14/2019
 Well Plugged:
 Site Release:
 Last Inspection: 11/14/2019

History

Effective Date	Property	Well Number	Operator	C-191 Work Type	Well Type	Well Status	Apd Cancelled	Plug Date
09/26/2019	[317790] REMUDA NORTH 25 STATE	#908H	[5380] XTO ENERGY, INC	New	Oil	New		

Comments

Quick

- [Gene](#)
- [Histor](#)
- [Comr](#)
- [Oper](#)
- [Pits](#)
- [Casin](#)
- [Well](#)
- [Finan](#)
- [Comp](#)
- [Incid](#)
- [Order](#)
- [Prodi](#)
- [Trans](#)
- [Point](#)

Assoc

- [Well](#)
- [Well](#)
- [Well](#)

New

- [New](#)
- [New](#)
- [New](#)
- [New](#)
- [New](#)
- [New](#)
- [New](#)

Operator Data

Hearing Fee Application

Event Dates

Approved: 09/24/2019
Closed (most recent rig release):

Notes

Detail

Casing

No Casing Found

Well Completions

[15011] CULEBRA BLUFF; BONE SPRING, SOUTH

Last Produced:

DHC: Consolidation Code:
Production Method:

Well Test Data

Production Test:		Test Length:	0 hours
Flowing Tubing Pressure:	0 psi	Flowing Casing Pressure:	0 psi
Choke Size:	0.000 inches	Testing Method:	
Gas Volume:	0.0 MCF	Oil Volume:	0.0 bbls
Gas-Oil Ratio:	0 Kcf / bbl	Oil Gravity:	0.0 Corr. API
Disposition of Gas:		Water Volume:	0.0 bbls

Perforations

Date	Top Measured Depth (Where Completion Enters Formation)	Bottom Measured Depth (End of Lateral)	Top Vertical Depth	Bottom Vertical Depth
------	--	---	--------------------	-----------------------

Notes

Event Dates

TA Expiration:
Confidential Until:
Test Allowable End:
DHC:
Rlg Released:
Logs Received: No
Closure Pit Plat Received:
First Gas Production:

First Injection:	
Ready to Produce:	Completion Report Received:
C-104 Approval:	New Well C-104 Approval:
Plug Back:	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey Program **Date** 11/14/19

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
151.00	9,699.00	Survey #1 (908H Lateral)	MWD	OWSG MWD - Standard
9,745.00	17,726.00	Survey #2 (908H Lateral)	MWD+IFR1+MS	OWSG MWD + IFR1 + Multi-Station Correction
17,771.00	17,771.00	Survey #3 (908H Lateral)	Projection	Projection

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	463,988.40	624,322.60
REMUDA NORTH 25 STATE 908H SHL										
151.00	0.90	312.70	150.99	0.80	-0.87	1.19	312.70	0.60	463,989.20	624,321.73
241.00	0.60	331.00	240.99	1.70	-1.62	2.34	316.32	0.42	463,990.10	624,320.98
326.00	0.70	334.50	325.98	2.55	-2.06	3.28	321.12	0.13	463,990.95	624,320.54
400.00	0.60	337.70	399.98	3.32	-2.40	4.10	324.13	0.14	463,991.72	624,320.20
490.00	0.60	349.00	489.97	4.22	-2.67	4.99	327.68	0.13	463,992.62	624,319.93
582.00	0.60	329.60	581.97	5.11	-3.00	5.93	329.53	0.22	463,993.51	624,319.60
672.00	0.70	355.40	671.96	6.06	-3.29	6.90	331.53	0.34	463,994.46	624,319.31
764.00	0.60	348.90	763.95	7.09	-3.43	7.88	334.23	0.13	463,995.49	624,319.17
846.00	0.50	344.00	845.95	7.86	-3.61	8.65	335.35	0.13	463,996.26	624,318.99
935.00	0.70	333.90	934.95	8.72	-3.95	9.57	335.62	0.25	463,997.12	624,318.65
1,027.00	0.50	323.90	1,026.94	9.55	-4.44	10.53	335.08	0.24	463,997.95	624,318.16
1,118.00	0.60	300.70	1,117.94	10.11	-5.08	11.32	333.33	0.27	463,998.51	624,317.52
1,209.00	0.50	278.20	1,208.93	10.41	-5.88	11.96	330.54	0.26	463,998.81	624,316.72
1,300.00	0.60	259.00	1,299.93	10.38	-6.74	12.38	326.99	0.23	463,998.78	624,315.86
1,392.00	1.10	250.90	1,391.92	10.00	-8.05	12.84	321.16	0.56	463,998.40	624,314.55
1,482.00	0.90	245.70	1,481.90	9.43	-9.51	13.39	314.74	0.24	463,997.83	624,313.09
1,573.00	1.00	237.50	1,572.89	8.70	-10.83	13.90	308.78	0.19	463,997.10	624,311.77
1,664.00	0.40	314.10	1,663.89	8.50	-11.73	14.49	305.92	1.08	463,996.90	624,310.87
1,753.00	0.20	354.40	1,752.88	8.87	-11.97	14.90	306.54	0.31	463,997.27	624,310.63

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
1,844.00	0.70	258.00	1,843.88	8.91	-12.53	15.37	305.43	0.82	463,997.31	624,310.07	
1,935.00	0.70	6.40	1,934.88	9.35	-13.01	16.02	305.70	1.25	463,997.75	624,309.59	
2,026.00	1.10	19.70	2,025.87	10.72	-12.65	16.59	310.28	0.49	463,999.12	624,309.95	
2,117.00	1.20	5.20	2,116.85	12.50	-12.27	17.51	315.52	0.34	464,000.90	624,310.33	
2,208.00	1.70	6.40	2,207.82	14.79	-12.04	19.06	320.85	0.55	464,003.19	624,310.56	
2,299.00	2.10	5.80	2,298.77	17.79	-11.72	21.30	326.62	0.44	464,006.19	624,310.88	
2,391.00	2.20	357.90	2,390.70	21.23	-11.61	24.20	331.32	0.34	464,009.63	624,310.99	
2,481.00	3.20	9.20	2,480.60	25.43	-11.27	27.82	336.10	1.25	464,013.83	624,311.33	
2,572.00	3.70	15.40	2,571.44	30.77	-10.09	32.38	341.85	0.68	464,019.17	624,312.51	
2,663.00	3.60	22.50	2,662.26	36.24	-8.21	37.16	347.23	0.51	464,024.64	624,314.39	
2,754.00	3.50	22.60	2,753.08	41.45	-6.05	41.89	351.69	0.11	464,029.85	624,316.55	
2,844.00	3.40	25.50	2,842.92	46.39	-3.85	46.55	355.26	0.22	464,034.79	624,318.75	
2,934.00	4.40	13.80	2,932.71	52.15	-1.88	52.19	357.94	1.41	464,040.55	624,320.72	
3,025.00	5.00	7.60	3,023.40	59.47	-0.52	59.48	359.50	0.86	464,047.87	624,322.08	
3,155.00	4.90	10.90	3,152.92	70.54	1.28	70.55	1.04	0.23	464,058.94	624,323.88	
3,235.00	5.10	10.80	3,232.61	77.39	2.59	77.43	1.92	0.25	464,065.79	624,325.19	
3,325.00	5.60	2.90	3,322.22	85.70	3.56	85.78	2.38	0.99	464,074.10	624,326.16	
3,417.00	6.00	357.50	3,413.75	94.99	3.58	95.06	2.16	0.73	464,083.39	624,326.18	
3,509.00	6.20	357.70	3,505.23	104.76	3.17	104.81	1.73	0.22	464,093.16	624,325.77	
3,599.00	6.50	356.50	3,594.68	114.70	2.67	114.73	1.33	0.36	464,103.10	624,325.27	
3,689.00	6.70	356.70	3,684.08	125.03	2.05	125.04	0.94	0.22	464,113.43	624,324.65	
3,780.00	6.80	355.50	3,774.45	135.70	1.33	135.70	0.56	0.19	464,124.10	624,323.93	
3,870.00	7.10	355.60	3,863.79	146.55	0.48	146.55	0.19	0.33	464,134.95	624,323.08	
3,960.00	7.20	355.10	3,953.09	157.72	-0.43	157.72	359.84	0.13	464,146.12	624,322.17	
4,050.00	7.50	354.40	4,042.35	169.18	-1.48	169.19	359.50	0.35	464,157.58	624,321.12	
4,141.00	7.60	352.90	4,132.56	181.07	-2.81	181.09	359.11	0.24	464,169.47	624,319.79	
4,232.00	7.60	352.60	4,222.76	193.00	-4.32	193.05	358.72	0.04	464,181.40	624,318.28	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
4,322.00	7.50	352.80	4,311.98	204.73	-5.83	204.82	358.37	0.11	464,193.13	624,316.77	
4,414.00	7.50	353.60	4,403.20	216.66	-7.25	216.78	358.08	0.11	464,205.06	624,315.35	
4,506.00	6.60	356.90	4,494.50	227.90	-8.20	228.05	357.94	1.07	464,216.30	624,314.40	
4,597.00	6.40	356.40	4,584.92	238.19	-8.81	238.35	357.88	0.23	464,226.59	624,313.79	
4,686.00	6.20	356.40	4,673.38	247.93	-9.42	248.11	357.82	0.22	464,236.33	624,313.18	
4,777.00	6.00	356.90	4,763.86	257.59	-9.98	257.78	357.78	0.23	464,245.99	624,312.62	
4,869.00	5.50	357.30	4,855.40	266.79	-10.45	267.00	357.76	0.55	464,255.19	624,312.15	
4,905.00	5.46	357.22	4,891.23	270.23	-10.62	270.44	357.75	0.11	464,258.63	624,311.98	
Wellpath Crosses Unit Line @ Heel											
4,961.00	5.40	357.10	4,946.98	275.52	-10.88	275.74	357.74	0.11	464,263.92	624,311.72	
5,051.00	5.30	357.10	5,036.59	283.90	-11.30	284.13	357.72	0.11	464,272.30	624,311.30	
5,141.00	5.30	356.60	5,126.21	292.20	-11.76	292.44	357.70	0.05	464,280.60	624,310.84	
5,230.00	5.30	357.80	5,214.83	300.41	-12.16	300.66	357.68	0.12	464,288.81	624,310.44	
5,322.00	5.30	357.80	5,306.43	308.90	-12.49	309.16	357.68	0.00	464,297.30	624,310.11	
5,412.00	5.10	358.20	5,396.06	317.06	-12.77	317.31	357.69	0.23	464,305.46	624,309.83	
5,503.00	4.70	356.00	5,486.73	324.82	-13.16	325.09	357.68	0.49	464,313.22	624,309.44	
5,594.00	4.40	352.60	5,577.44	332.00	-13.87	332.29	357.61	0.44	464,320.40	624,308.73	
5,684.00	4.00	352.10	5,667.20	338.53	-14.75	338.85	357.51	0.45	464,326.93	624,307.85	
5,776.00	3.60	348.90	5,759.00	344.55	-15.74	344.90	357.38	0.49	464,332.95	624,306.86	
5,867.00	3.30	345.70	5,849.83	349.89	-16.94	350.30	357.23	0.39	464,338.29	624,305.66	
5,957.00	2.90	341.90	5,939.70	354.56	-18.29	355.03	357.05	0.50	464,342.96	624,304.31	
6,047.00	2.60	341.30	6,029.60	358.66	-19.65	359.20	356.86	0.33	464,347.06	624,302.95	
6,138.00	2.20	339.70	6,120.52	362.25	-20.92	362.86	356.70	0.45	464,350.65	624,301.68	
6,228.00	2.10	339.20	6,210.45	365.41	-22.10	366.08	356.54	0.11	464,353.81	624,300.50	
6,319.00	1.80	329.70	6,301.40	368.21	-23.42	368.95	356.36	0.48	464,356.61	624,299.18	
6,409.00	1.50	324.20	6,391.36	370.38	-24.82	371.21	356.17	0.38	464,358.78	624,297.78	
6,499.00	1.30	311.40	6,481.34	372.01	-26.27	372.94	355.96	0.41	464,360.41	624,296.33	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
6,590.00	1.00	328.90	6,572.32	373.37	-27.46	374.38	355.79	0.50	464,361.77	624,295.14	
6,679.00	1.00	329.20	6,661.31	374.71	-28.26	375.77	355.69	0.01	464,363.11	624,294.34	
6,770.00	0.50	352.80	6,752.30	375.78	-28.71	376.88	355.63	0.63	464,364.18	624,293.89	
6,861.00	0.30	40.30	6,843.30	376.36	-28.61	377.44	355.65	0.41	464,364.76	624,293.99	
6,951.00	0.40	65.00	6,933.29	376.67	-28.17	377.72	355.72	0.20	464,365.07	624,294.43	
7,041.00	0.20	68.70	7,023.29	376.86	-27.74	377.88	355.79	0.22	464,365.26	624,294.86	
7,130.00	0.01	14.00	7,112.29	376.92	-27.59	377.93	355.81	0.22	464,365.32	624,295.01	
7,221.00	0.01	186.20	7,203.29	376.92	-27.59	377.93	355.81	0.02	464,365.32	624,295.01	
7,312.00	0.50	87.60	7,294.29	376.93	-27.20	377.91	355.87	0.55	464,365.33	624,295.40	
7,405.00	0.40	159.90	7,387.29	376.65	-26.68	377.59	355.95	0.58	464,365.05	624,295.92	
7,496.00	0.60	170.80	7,478.29	375.88	-26.49	376.81	355.97	0.24	464,364.28	624,296.11	
7,586.00	0.30	181.60	7,568.28	375.18	-26.42	376.11	355.97	0.34	464,363.58	624,296.18	
7,676.00	0.20	186.90	7,658.28	374.78	-26.45	375.72	355.96	0.11	464,363.18	624,296.15	
7,767.00	0.20	178.10	7,749.28	374.47	-26.46	375.40	355.96	0.03	464,362.87	624,296.14	
7,860.00	0.40	163.90	7,842.28	373.99	-26.37	374.92	355.97	0.23	464,362.39	624,296.23	
7,952.00	1.00	122.60	7,934.27	373.25	-25.60	374.13	356.08	0.81	464,361.65	624,297.00	
8,044.00	1.30	91.80	8,026.26	372.79	-23.88	373.55	356.33	0.73	464,361.19	624,298.72	
8,136.00	2.20	92.70	8,118.21	372.67	-21.08	373.27	356.76	0.98	464,361.07	624,301.52	
8,228.00	1.10	126.00	8,210.17	372.07	-18.60	372.53	357.14	1.54	464,360.47	624,304.00	
8,320.00	0.80	173.00	8,302.16	370.91	-17.81	371.34	357.25	0.88	464,359.31	624,304.79	
8,412.00	0.70	171.30	8,394.16	369.72	-17.64	370.14	357.27	0.11	464,358.12	624,304.96	
8,505.00	0.40	199.50	8,487.15	368.85	-17.66	369.28	357.26	0.43	464,357.25	624,304.94	
8,597.00	0.90	249.90	8,579.15	368.30	-18.45	368.76	357.13	0.78	464,356.70	624,304.15	
8,689.00	2.50	257.20	8,671.10	367.61	-21.09	368.21	356.72	1.75	464,356.01	624,301.51	
8,781.00	3.10	269.20	8,762.99	367.13	-25.53	368.02	356.02	0.91	464,355.53	624,297.07	
8,874.00	1.80	253.30	8,855.91	366.67	-29.44	367.85	355.41	1.56	464,355.07	624,293.16	
8,965.00	1.30	196.80	8,946.88	365.28	-31.11	366.60	355.13	1.68	464,353.68	624,291.49	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H, 127H, 128H, 168H, 908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
9,057.00	1.50	197.60	9,038.85	363.13	-31.78	364.52	355.00	0.22	464,351.53	624,290.82	
9,150.00	1.50	178.50	9,131.82	360.75	-32.11	362.18	354.91	0.54	464,349.15	624,290.49	
9,242.00	1.50	174.90	9,223.79	358.35	-31.97	359.77	354.90	0.10	464,346.75	624,290.63	
9,335.00	1.80	186.50	9,316.75	355.68	-32.03	357.12	354.85	0.48	464,344.08	624,290.57	
9,427.00	1.80	200.60	9,408.70	352.90	-32.70	354.41	354.71	0.48	464,341.30	624,289.90	
9,489.00	1.30	206.50	9,470.68	351.36	-33.36	352.94	354.58	0.85	464,339.76	624,289.24	
9,607.00	1.40	182.80	9,588.65	348.72	-34.03	350.37	354.43	0.48	464,337.12	624,288.57	
9,699.00	3.40	40.00	9,680.60	349.69	-32.33	351.18	354.72	4.99	464,338.09	624,290.27	
9,745.00	9.64	18.31	9,726.29	354.39	-30.24	355.68	355.12	14.35	464,342.79	624,292.36	
9,790.00	14.81	13.39	9,770.26	363.57	-27.72	364.63	355.64	11.71	464,351.97	624,294.88	
9,835.00	14.64	4.30	9,813.78	374.84	-25.96	375.74	356.04	5.14	464,363.24	624,296.64	
9,880.00	17.03	4.46	9,857.07	387.08	-25.02	387.89	356.30	5.31	464,375.48	624,297.58	
9,926.00	20.21	356.90	9,900.67	401.74	-24.93	402.51	356.45	8.67	464,390.14	624,297.67	
9,971.00	23.26	350.25	9,942.47	418.26	-26.86	419.12	356.33	8.70	464,406.66	624,295.74	
10,017.00	25.03	347.60	9,984.44	436.72	-30.48	437.78	356.01	4.51	464,425.12	624,292.12	
10,063.00	27.85	349.87	10,025.63	456.80	-34.46	458.10	355.69	6.51	464,445.20	624,288.14	
10,108.00	33.13	350.91	10,064.39	479.31	-38.26	480.84	355.44	11.79	464,467.71	624,284.34	
10,153.00	38.10	352.84	10,100.96	505.25	-41.93	506.98	355.26	11.32	464,493.65	624,280.67	
10,243.00	43.50	354.19	10,169.07	563.66	-48.54	565.74	355.08	6.08	464,552.06	624,274.06	
10,288.00	44.25	356.16	10,201.51	594.73	-51.16	596.93	355.08	3.46	464,583.13	624,271.44	
10,326.00	47.82	357.05	10,227.89	622.03	-52.77	624.26	355.15	9.54	464,610.43	624,269.83	
Wellpath Crosses FTP											
10,334.00	48.57	357.22	10,233.22	627.99	-53.07	630.22	355.17	9.54	464,616.39	624,269.53	
10,381.00	54.96	351.99	10,262.30	664.69	-56.61	667.10	355.13	16.16	464,653.09	624,265.99	
10,389.47	56.02	351.27	10,267.11	671.60	-57.62	674.07	355.10	14.36	464,660.00	624,264.98	
REMUDA NORTH 26 STATE 908H FTP_350FSL_541FWL											
10,425.00	60.52	348.44	10,285.79	701.33	-62.96	704.15	354.87	14.36	464,689.73	624,259.64	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H, 127H, 128H, 168H, 908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)		TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)
10,471.00	67.47	348.76		10,305.94	741.83	-71.13	745.23	354.52	15.12	464,730.23	624,251.47
10,516.00	71.89	348.81		10,321.57	783.21	-79.33	787.22	354.22	9.82	464,771.61	624,243.27
10,561.00	78.18	348.47		10,333.18	825.81	-87.89	830.48	353.92	14.00	464,814.21	624,234.71
10,607.00	82.73	346.41		10,340.81	870.08	-97.76	875.55	353.59	10.83	464,858.48	624,224.84
10,662.65	88.87	345.78		10,344.88	923.92	-111.09	930.58	353.14	11.09	464,912.32	624,211.51
REMUDA NORTH 25 STATE 908H LPp2 (307'Past FTP)											
10,698.00	92.77	345.39		10,344.38	958.15	-119.88	965.62	352.87	11.09	464,946.55	624,202.72
10,790.00	92.60	349.76		10,340.06	1,047.88	-139.65	1,057.14	352.41	4.75	465,036.28	624,182.95
10,881.00	91.82	355.40		10,336.55	1,138.01	-151.39	1,148.04	352.42	6.25	465,126.41	624,171.21
10,971.00	91.82	1.58		10,333.69	1,227.89	-153.76	1,237.48	352.86	6.86	465,216.29	624,168.84
11,062.00	92.21	2.19		10,330.49	1,318.78	-150.77	1,327.38	353.48	0.80	465,307.18	624,171.83
11,154.00	89.38	2.16		10,329.21	1,410.70	-147.28	1,418.37	354.04	3.08	465,399.10	624,175.32
11,246.00	89.97	1.92		10,329.74	1,502.64	-144.00	1,509.52	354.53	0.69	465,491.04	624,178.60
11,336.00	90.98	1.27		10,328.99	1,592.60	-141.50	1,598.87	354.92	1.33	465,581.00	624,181.10
11,426.00	91.82	0.33		10,326.79	1,682.56	-140.24	1,688.40	355.24	1.40	465,670.96	624,182.36
11,517.00	90.25	0.10		10,325.15	1,773.54	-139.90	1,779.05	355.49	1.74	465,761.94	624,182.70
11,607.00	91.18	359.57		10,324.02	1,863.54	-140.16	1,868.80	355.70	1.19	465,851.94	624,182.44
11,698.00	91.74	358.38		10,321.71	1,954.49	-141.79	1,959.63	355.85	1.44	465,942.89	624,180.81
11,788.00	90.64	0.48		10,319.84	2,044.46	-142.68	2,049.43	356.01	2.63	466,032.86	624,179.92
11,879.00	91.62	359.72		10,318.04	2,135.44	-142.52	2,140.19	356.18	1.36	466,123.84	624,180.08
11,969.00	91.99	0.67		10,315.21	2,225.39	-142.22	2,229.93	356.34	1.13	466,213.79	624,180.38
12,060.00	88.63	2.12		10,314.71	2,316.35	-140.00	2,320.58	356.54	4.02	466,304.75	624,182.60
12,151.00	89.78	2.00		10,315.98	2,407.28	-136.73	2,411.16	356.75	1.27	466,395.68	624,185.87
12,242.00	86.95	2.53		10,318.57	2,498.16	-133.14	2,501.71	356.95	3.16	466,486.56	624,189.46
12,333.00	87.82	2.52		10,322.72	2,588.98	-129.13	2,592.20	357.14	0.96	466,577.38	624,193.47
12,423.00	86.39	0.29		10,327.27	2,678.83	-126.93	2,681.83	357.29	2.94	466,667.23	624,195.67
12,514.00	86.67	359.93		10,332.78	2,769.66	-126.75	2,772.56	357.38	0.50	466,758.06	624,195.85

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
12,605.00	87.34	0.09	10,337.53	2,860.54	-126.74	2,863.34	357.46	0.76	466,848.94	624,195.86	
12,695.00	88.46	359.24	10,340.83	2,950.47	-127.26	2,953.22	357.53	1.56	466,938.87	624,195.34	
12,786.00	88.63	359.15	10,343.14	3,041.43	-128.54	3,044.15	357.58	0.21	467,029.83	624,194.06	
12,879.00	88.91	358.81	10,345.14	3,134.40	-130.19	3,137.10	357.62	0.47	467,122.80	624,192.41	
12,968.00	88.99	358.35	10,346.77	3,223.36	-132.40	3,226.07	357.65	0.52	467,211.76	624,190.20	
13,058.00	88.63	357.74	10,348.64	3,313.28	-135.47	3,316.05	357.66	0.79	467,301.68	624,187.13	
13,150.00	89.75	358.08	10,349.94	3,405.21	-138.82	3,408.04	357.67	1.27	467,393.61	624,183.78	
13,240.00	91.60	1.90	10,348.88	3,495.18	-138.84	3,497.94	357.73	4.72	467,483.58	624,183.76	
13,331.00	91.09	1.53	10,346.74	3,586.12	-136.12	3,588.70	357.83	0.69	467,574.52	624,186.48	
13,421.00	90.14	1.75	10,345.78	3,676.08	-133.54	3,678.50	357.92	1.08	467,664.48	624,189.06	
13,511.00	90.50	359.79	10,345.27	3,766.06	-132.33	3,768.39	357.99	2.21	467,754.46	624,190.27	
13,602.00	93.17	0.15	10,342.36	3,857.01	-132.38	3,859.28	358.03	2.96	467,845.41	624,190.22	
13,693.00	93.05	0.09	10,337.42	3,947.87	-132.19	3,950.08	358.08	0.15	467,936.27	624,190.41	
13,785.00	92.02	0.49	10,333.35	4,039.78	-131.72	4,041.93	358.13	1.20	468,028.18	624,190.88	
13,876.00	91.51	0.78	10,330.55	4,130.73	-130.72	4,132.80	358.19	0.64	468,119.13	624,191.88	
13,967.00	91.20	0.75	10,328.40	4,221.70	-129.50	4,223.68	358.24	0.34	468,210.10	624,193.10	
14,058.00	90.62	0.21	10,326.95	4,312.68	-128.74	4,314.60	358.29	0.87	468,301.08	624,193.86	
14,149.00	90.20	359.94	10,326.30	4,403.68	-128.62	4,405.56	358.33	0.55	468,392.08	624,193.98	
14,240.00	89.44	359.70	10,326.59	4,494.68	-128.91	4,496.52	358.36	0.88	468,483.08	624,193.69	
14,332.00	89.02	358.77	10,327.82	4,586.66	-130.13	4,588.50	358.37	1.11	468,575.06	624,192.47	
14,424.00	90.67	358.09	10,328.07	4,678.62	-132.66	4,680.50	358.38	1.94	468,667.02	624,189.94	
14,517.00	90.56	357.58	10,327.08	4,771.55	-136.17	4,773.49	358.37	0.56	468,759.95	624,186.43	
14,609.00	89.58	356.96	10,326.96	4,863.44	-140.55	4,865.47	358.34	1.26	468,851.84	624,182.05	
14,701.00	91.18	358.68	10,326.35	4,955.37	-144.05	4,957.46	358.33	2.55	468,943.77	624,178.55	
14,794.00	92.38	359.13	10,323.46	5,048.30	-145.83	5,050.41	358.35	1.38	469,036.70	624,176.77	
14,886.00	92.94	359.31	10,319.19	5,140.20	-147.08	5,142.30	358.36	0.64	469,128.60	624,175.52	
14,979.00	93.42	359.18	10,314.04	5,233.04	-148.30	5,235.14	358.38	0.53	469,221.44	624,174.30	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
15,071.00	92.27	1.41	10,309.47	5,324.92	-147.83	5,326.97	358.41	2.72	469,313.32	624,174.77	
15,163.00	91.15	0.73	10,306.72	5,416.86	-146.11	5,418.83	358.45	1.42	469,405.26	624,176.49	
15,256.00	89.50	0.50	10,306.20	5,509.85	-145.11	5,511.76	358.49	1.79	469,498.25	624,177.49	
15,347.00	90.53	3.04	10,306.17	5,600.80	-142.30	5,602.61	358.54	3.01	469,589.20	624,180.30	
15,439.00	91.54	4.90	10,304.51	5,692.56	-135.93	5,694.18	358.63	2.30	469,680.96	624,186.67	
15,531.00	88.88	1.92	10,304.17	5,784.38	-130.46	5,785.85	358.71	4.34	469,772.78	624,192.14	
15,624.00	91.96	0.88	10,303.49	5,877.33	-128.19	5,878.73	358.75	3.50	469,865.73	624,194.41	
15,714.00	92.66	1.68	10,299.86	5,967.24	-126.18	5,968.57	358.79	1.18	469,955.64	624,196.42	
15,806.00	91.76	359.44	10,296.32	6,059.16	-125.28	6,060.45	358.82	2.62	470,047.56	624,197.32	
15,898.00	92.32	359.31	10,293.04	6,151.09	-126.29	6,152.39	358.82	0.62	470,139.49	624,196.31	
15,990.00	91.74	357.61	10,289.78	6,243.00	-128.76	6,244.33	358.82	1.95	470,231.40	624,193.84	
16,082.00	92.89	357.41	10,286.07	6,334.84	-132.75	6,336.23	358.80	1.27	470,323.24	624,189.85	
16,175.00	89.44	357.29	10,284.17	6,427.70	-137.05	6,429.16	358.78	3.71	470,416.10	624,185.55	
16,267.00	89.52	357.07	10,285.01	6,519.59	-141.58	6,521.12	358.76	0.25	470,507.99	624,181.02	
16,359.00	90.78	357.72	10,284.77	6,611.49	-145.76	6,613.10	358.74	1.54	470,599.89	624,176.84	
16,452.00	91.65	357.33	10,282.80	6,704.38	-149.77	6,706.05	358.72	1.03	470,692.78	624,172.83	
16,544.00	90.59	358.57	10,281.00	6,796.30	-153.06	6,798.03	358.71	1.77	470,784.70	624,169.54	
16,637.00	90.98	357.53	10,279.72	6,889.24	-156.23	6,891.01	358.70	1.19	470,877.64	624,166.37	
16,729.00	91.06	356.96	10,278.09	6,981.12	-160.65	6,982.96	358.68	0.63	470,969.52	624,161.95	
16,821.00	91.79	356.90	10,275.80	7,072.96	-165.57	7,074.89	358.66	0.80	471,061.36	624,157.03	
16,914.00	91.90	356.86	10,272.80	7,165.77	-170.63	7,167.80	358.64	0.13	471,154.17	624,151.97	
17,006.00	91.20	357.90	10,270.32	7,257.64	-174.84	7,259.74	358.62	1.36	471,246.04	624,147.76	
17,098.00	91.29	358.12	10,268.32	7,349.56	-178.03	7,351.72	358.61	0.26	471,337.96	624,144.57	
17,190.00	89.78	359.80	10,267.46	7,441.54	-179.70	7,443.70	358.62	2.46	471,429.94	624,142.90	
17,282.00	89.52	359.75	10,268.02	7,533.53	-180.06	7,535.68	358.63	0.29	471,521.93	624,142.54	
17,375.00	89.55	359.84	10,268.77	7,626.53	-180.39	7,628.66	358.65	0.10	471,614.93	624,142.21	
17,467.00	89.44	359.72	10,269.59	7,718.53	-180.75	7,720.64	358.66	0.18	471,706.93	624,141.85	

Survey Report Landscape

Company: XTO Energy
Project: Eddy County, NM (NAD27) NMEZ Grid
Site: Remuda North 25 State 107H,127H,128H,168H,908H
Well: RN25-908H
Wellbore: 908H Lateral
Design: 908H Lateral AsDrilled

Local Co-ordinate Reference: Well RN25-908H - Slot RN25 - 908H SHL
TVD Reference: 3074+25 @ 3099.00usft (Tri101)
MD Reference: 3074+25 @ 3099.00usft (Tri101)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: STRYKER_EDM


Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Distance (usft)	Closure Azimuth (°)	DLeg (°/100ft)	Northing (usft)	Easting (usft)	
17,559.00	89.80	359.69	10,270.20	7,810.52	-181.22	7,812.62	358.67	0.39	471,798.92	624,141.38	
17,651.00	90.28	359.63	10,270.13	7,902.52	-181.77	7,904.61	358.68	0.53	471,890.92	624,140.83	
17,656.44	90.28	359.64	10,270.10	7,907.96	-181.80	7,910.05	358.68	0.17	471,896.36	624,140.80	
REMUDA NORTH 27 STATE 908H LTP_330FNL_591FWL											
17,657.00	90.28	359.64	10,270.10	7,908.52	-181.80	7,910.61	358.68	0.17	471,896.92	624,140.80	
Wellpath Crosses LTP											
17,726.00	90.28	359.76	10,269.77	7,977.52	-182.17	7,979.60	358.69	0.17	471,965.92	624,140.43	
17,771.00	90.28	359.76	10,269.55	8,022.52	-182.35	8,024.59	358.70	0.00	472,010.92	624,140.25	
TD @ 216FNL,747FEL - REMUDA NORTH 28 STATE 908H PBHL_200FNL_591FWL											

Design Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
4,905.00	4,891.23	270.23	-10.62	Wellpath Crosses Unit Line @ Heel	
10,326.00	10,227.89	622.03	-52.77	Wellpath Crosses FTP	
17,657.00	10,270.10	7,908.52	-181.80	Wellpath Crosses LTP	
17,771.00	10,269.55	8,022.52	-182.35	TD @ 216FNL,747FEL	

Checked By: _____ Approved By: _____ Date: _____

XTO Energy

Project: Eddy County, NM (NAD27) NMEZ Grid
 Site: Remuda North 25 State 107H,127H,128H,168H,908H
 Well: RN25-908H
 Wellbore: 908H Lateral
 Design: 908H Lateral AsDrilled

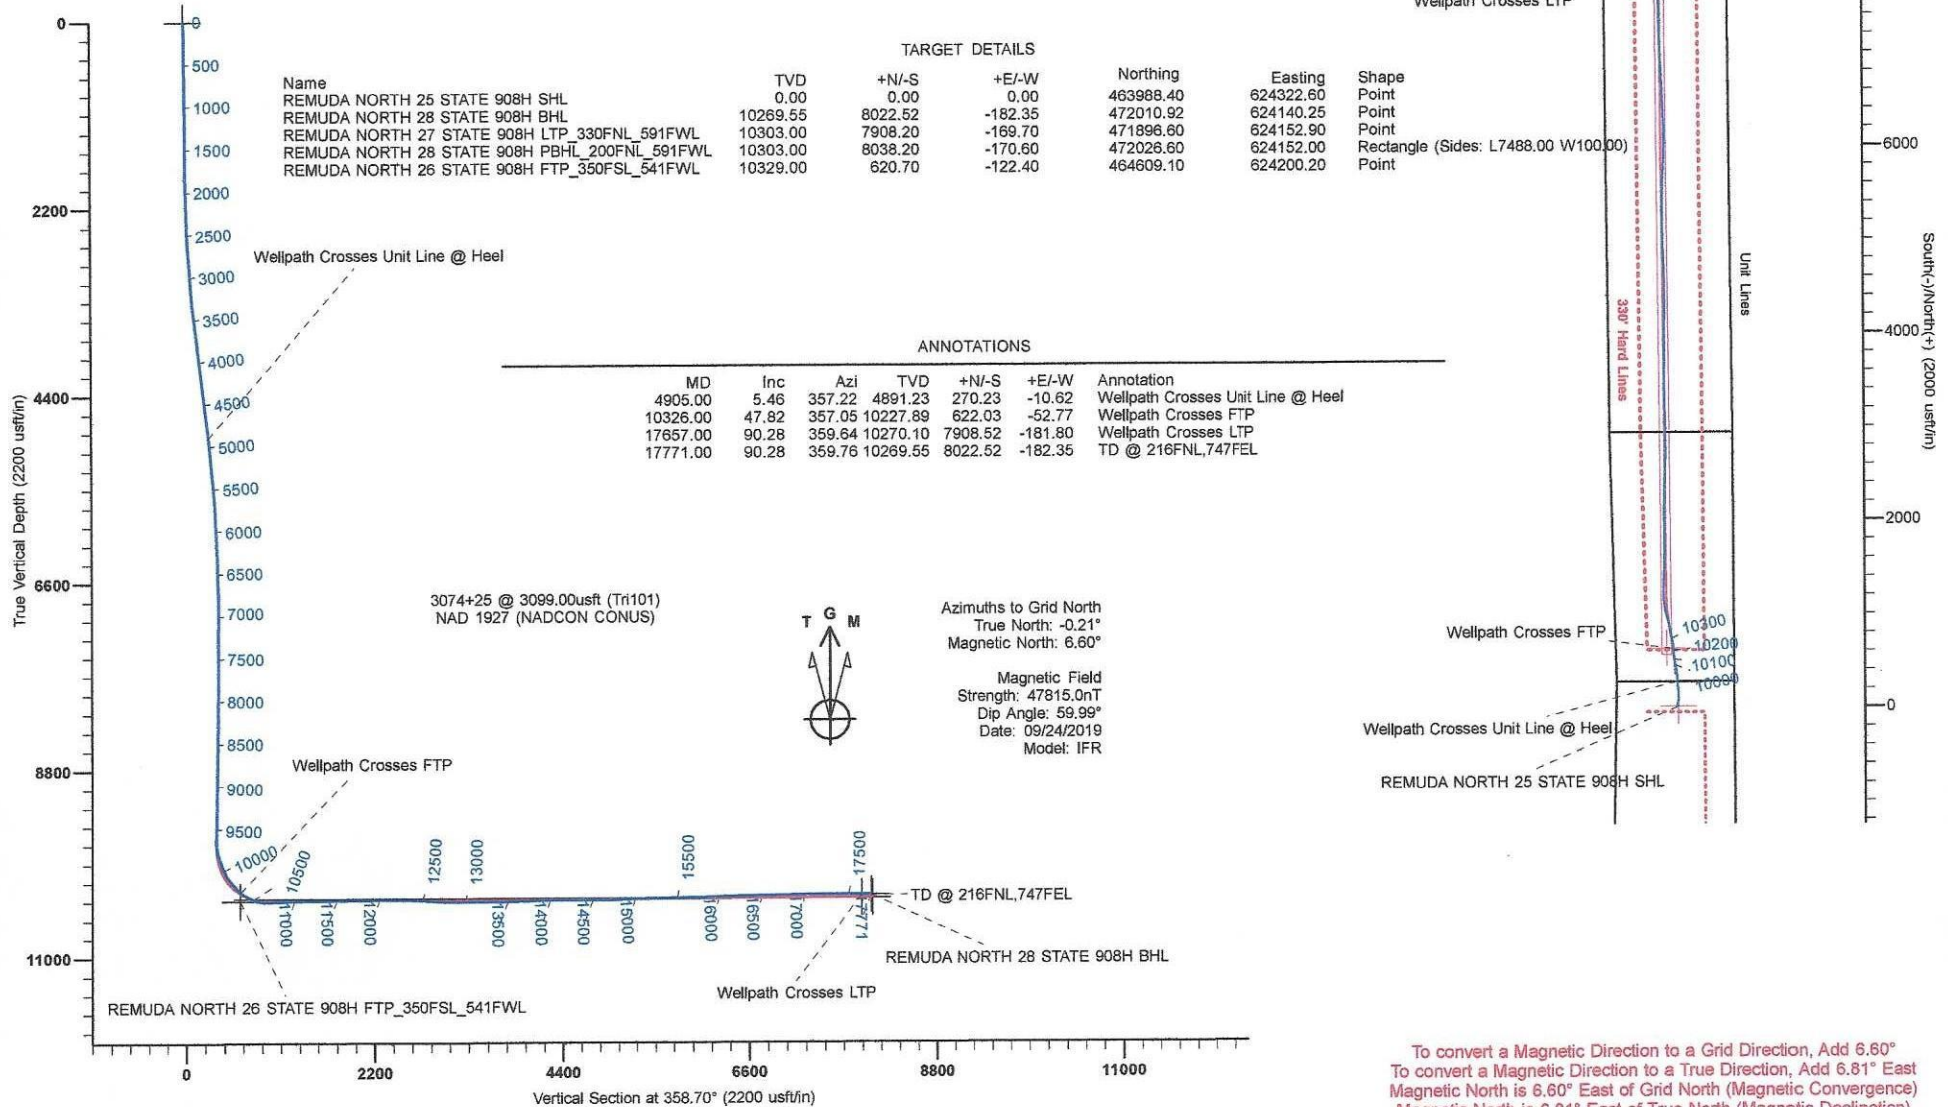

Design: 908H Lateral AsDrilled (RN25-908H/908H Lateral)
 Created By: Mekka Williams
 eSomina Well Design
 mekka@esominawelldesign.com
 9:10, November 14 2019

STRYKER DIRECTIONAL
6701 FM 307
Midland, Texas 79706 - 432-687-1121



District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 18767

CONDITIONS OF APPROVAL

Operator:	OGRID:	Action Number:	Action Type:
XTO ENERGY, INC 6401 Holiday Hill Road Building #5 Midland, TX79707	5380	18767	C-104C

OCD Reviewer	Condition
jagarcia	None