

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Caza Operating LLC 200 N. Lorraine St. #1550, Midland, TX 79701		² OGRID Number 249099
		³ Reason for Filing Code/ Effective Date NW
⁴ API Number 30 - 0 25-46553	⁵ Pool Name WC-025 G-09 S253536D; UPR WOLFCAMP	⁶ Pool Code 98228 KZ
⁷ Property Code 317657 326483	⁸ Property Name SIOUX 25-36 STATE FED COM	⁹ Well Number 12H

II. ¹⁰ Surface Location

Ul or lot no. B	Section 25	Township 25S	Range 35E	Lot Idn	Feet from the 123	North/South Line North	Feet from the 1449	East/West line East	County Lea
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location

SL

UL or lot no. P	Section 36	Township 25S	Range 35E	Lot Idn	Feet from the 103	North/South line South	Feet from the 354	East/West line East	County Lea
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date 12/29/2020	¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date		


III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
373554	Salt Creek Midstream 5825 N. Sam Houston Pkwy W. #150 Houston, TX 77086	O
24650	Versado Gas Processors Targa Midstream Services, LLC 100 Louisiana, # 4300, Houston TX 77002	G
025670	BC & V OPERATING, INC. P.O. BOX 837 HOBBS, NM 88M1-0837	W

IV. Well Completion Data

²¹ Spud Date 2/1/2020	²² Ready Date 12/29/2020	²³ TD 22350	²⁴ PBTD 22319	²⁵ Perforations 12640-22319	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	
17.5		13.375		1141	
12.25		9.625		9204	
8.5		6		22335	

V. Well Test Data

³¹ Date New Oil 1/12/2021	³² Gas Delivery Date 1/12/2021	³³ Test Date 1/29/2021	³⁴ Test Length 24	³⁵ Tbg. Pressure 897	³⁶ Csg. Pressure 1200
³⁷ Choke Size 40	³⁸ Oil 1406	³⁹ Water 1970	⁴⁰ Gas 1213		⁴¹ Test Method F
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 			OIL CONSERVATION DIVISION		
Printed name: Steve Morris			Approved by: PATRICIA MARTINEZ		
Title: Engineer			Title: LM II		
E-mail Address: steve.morris@morcorengineering.com			Approval Date: 3/24/2021		
Date: 1/30/2021		Phone: 985-415-9729	FILE 3160-4 BLM COMPLETION REPORT WITHIN 10 DAYS TO NMOCD AFTER BLM APPROVAL.		

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-9720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-46553	² Pool Code 98228	³ Pool Name WC-025 G-09 S253536D; UPR WOLFCAMP
⁴ Property Code -317657 326483	⁵ Property Name SIOUX 25-36 STATE FED COM	⁶ Well Number 12H
⁷ OGRID No. 249099	⁸ Operator Name CAZA OPERATING LLC	⁹ Elevation 3085'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	25	25S	35E		123	NORTH	1449	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	36	25S	35E		103	SOUTH	354	EAST	LEA

¹² Dedicated Acres 320.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

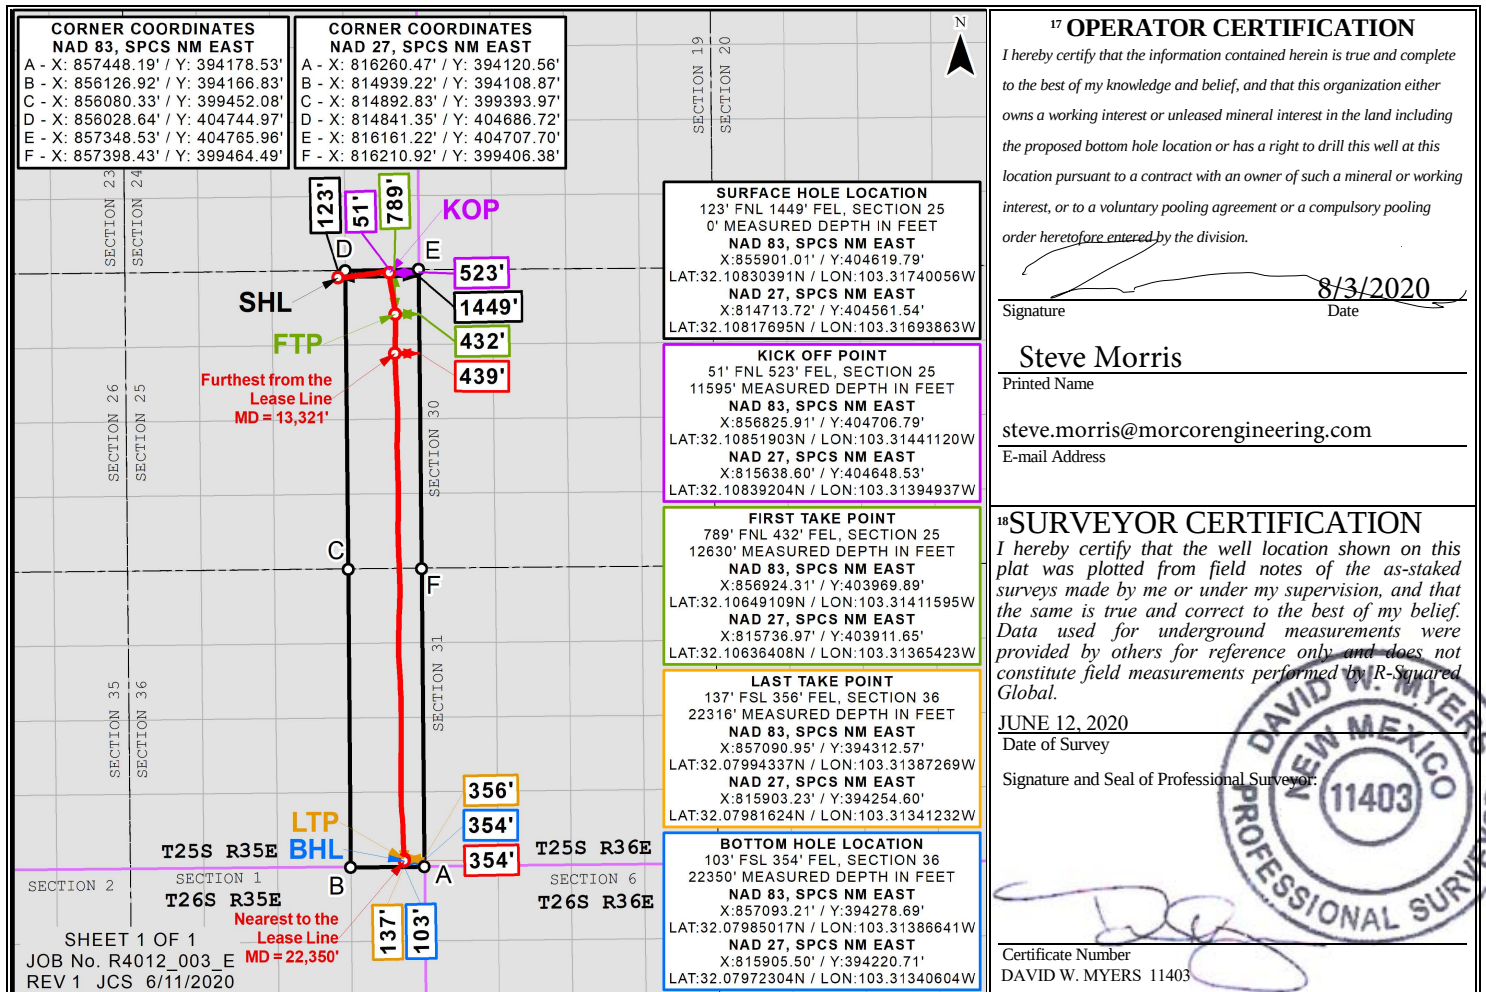



Caza Operating LLC

Sioux 25-36 State Fed Com 12H

Sioux 25-36 State Fed Com 12H

Sioux 25-36 State Fed Com 12H

Sioux 25-36 State Fed Com 12H

Survey: Sioux 25-36 State Fed Com 12H

Morcor Standard Plan

04 June, 2020

These surveys are true and accurate to the best of my knowledge.

A handwritten signature in black ink, appearing to read 'Steve Morris'.

Steve Morris



Morcor Engineering

Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Project	Sioux 25-36 State Fed Com 12H		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Sioux 25-36 State Fed Com 12H		
Site Position:		Northing:	404,619.78 usft
From:	Map	Easting:	855,901.01 usft
Position Uncertainty:	1.0 usft	Slot Radius:	17-1/2 "
		Latitude:	32° 6' 29.894 N
		Longitude:	103° 19' 2.642 W
		Grid Convergence:	0.54 °

Well	Sioux 25-36 State Fed Com 12H		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	1.0 usft	Wellhead Elevation:	usft
		Latitude:	32° 6' 29.894 N
		Longitude:	103° 19' 2.642 W
		Ground Level:	3,085.0 usft

Wellbore	Sioux 25-36 State Fed Com 12H		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2010	9/15/2018	6.56
			Dip Angle (°)
			59.93
			Field Strength (nT)
			47,849

Design	Sioux 25-36 State Fed Com 12H		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.0	0.0	0.0
			Direction (°)
			173.74

Survey Program	Date	6/4/2020		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
126.0	22,350.0	Sioux 25-36 State Fed Com 12H (Sioux 25	MWD	MWD - Standard



Morcor Engineering

Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
0.0	0.00	0.00	0.0	-3,109.0	0.0	0.0	855,901.01	404,619.78	0.00	0.00	
126.0	0.83	306.62	126.0	-2,983.0	0.5	-0.7	855,900.28	404,620.32	-0.62	0.66	
217.0	1.29	313.57	217.0	-2,892.0	1.6	-2.0	855,899.01	404,621.42	-1.85	0.52	
312.0	0.47	340.45	312.0	-2,797.0	2.7	-2.9	855,898.10	404,622.53	-3.05	0.94	
403.0	1.54	72.40	403.0	-2,706.0	3.5	-1.9	855,899.14	404,623.25	-3.65	1.79	
495.0	3.54	91.97	494.9	-2,614.1	3.7	2.1	855,903.16	404,623.53	-3.49	2.34	
587.0	4.25	91.38	586.6	-2,522.4	3.6	8.4	855,909.41	404,623.35	-2.63	0.77	
680.0	6.30	91.80	679.3	-2,429.7	3.3	16.9	855,917.95	404,623.10	-1.46	2.20	
772.0	8.45	92.67	770.5	-2,338.5	2.8	28.7	855,929.75	404,622.63	0.30	2.34	
864.0	9.29	98.61	861.4	-2,247.6	1.4	42.8	855,943.85	404,621.20	3.26	1.35	
956.0	9.10	93.86	952.2	-2,156.8	-0.2	57.4	855,958.45	404,619.60	6.44	0.85	
1,049.0	10.46	89.24	1,043.9	-2,065.1	-0.6	73.2	855,974.23	404,619.22	8.54	1.69	
1,100.0	11.12	88.45	1,094.0	-2,015.0	-0.4	82.8	855,983.77	404,619.41	9.39	1.33	
1,273.0	10.63	86.51	1,263.8	-1,845.2	1.1	115.4	856,016.38	404,620.83	11.53	0.35	
1,367.0	10.65	84.51	1,356.2	-1,752.8	2.4	132.7	856,033.68	404,622.19	12.07	0.39	
1,460.0	10.53	77.90	1,447.6	-1,661.4	5.0	149.5	856,050.54	404,624.80	11.32	1.31	
1,555.0	11.06	76.16	1,541.0	-1,568.0	9.0	166.9	856,067.88	404,628.80	9.23	0.65	
1,650.0	10.51	77.80	1,634.3	-1,474.7	13.0	184.2	856,085.19	404,632.81	7.13	0.66	
1,743.0	10.74	80.68	1,725.7	-1,383.3	16.2	201.0	856,102.03	404,636.00	5.79	0.62	
1,837.0	9.85	79.79	1,818.2	-1,290.8	19.1	217.6	856,118.59	404,638.85	4.77	0.96	
1,932.0	10.25	78.85	1,911.7	-1,197.3	22.1	233.9	856,134.88	404,641.92	3.49	0.46	
2,027.0	9.97	82.01	2,005.2	-1,103.8	24.9	250.3	856,151.32	404,644.70	2.52	0.65	
2,122.0	10.46	83.10	2,098.7	-1,010.3	27.1	267.0	856,168.02	404,646.88	2.18	0.55	
2,216.0	10.17	79.59	2,191.2	-917.8	29.6	283.6	856,184.66	404,649.40	1.48	0.74	
2,310.0	10.12	76.75	2,283.8	-825.2	33.0	299.8	856,200.86	404,652.80	-0.12	0.53	
2,404.0	11.15	77.24	2,376.1	-732.9	36.9	316.7	856,217.76	404,656.70	-2.16	1.10	
2,498.0	11.01	77.59	2,468.4	-640.6	40.9	334.4	856,235.39	404,660.63	-4.15	0.17	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
2,592.0	9.73	82.37	2,560.8	-548.2	43.8	351.0	856,252.03	404,663.62	-5.30	1.64	
2,687.0	8.66	84.08	2,654.6	-454.4	45.6	366.1	856,267.10	404,665.42	-5.45	1.16	
2,780.0	9.23	81.33	2,746.5	-362.5	47.5	380.4	856,281.44	404,667.27	-5.72	0.77	
2,874.0	9.44	93.95	2,839.3	-269.7	48.1	395.6	856,296.58	404,667.87	-4.67	2.18	
2,968.0	8.30	88.59	2,932.1	-176.9	47.7	410.0	856,311.06	404,667.51	-2.73	1.50	
3,062.0	9.09	91.44	3,025.1	-83.9	47.7	424.3	856,325.26	404,667.49	-1.16	0.96	
3,156.0	8.68	90.60	3,117.9	8.9	47.4	438.8	856,339.78	404,667.23	0.68	0.46	
3,251.0	8.98	86.42	3,211.8	102.8	47.8	453.3	856,354.35	404,667.61	1.88	0.75	
3,346.0	8.04	78.15	3,305.8	196.8	49.7	467.2	856,368.25	404,669.44	1.58	1.62	
3,439.0	7.69	74.88	3,397.9	288.9	52.6	479.6	856,380.62	404,672.40	-0.01	0.61	
3,534.0	7.50	77.18	3,492.1	383.1	55.7	491.8	856,392.80	404,675.43	-1.70	0.38	
3,629.0	7.93	77.62	3,586.2	477.2	58.4	504.2	856,405.25	404,678.22	-3.10	0.46	
3,724.0	8.81	79.84	3,680.2	571.2	61.1	517.8	856,418.81	404,680.90	-4.30	0.99	
3,819.0	8.78	84.56	3,774.1	665.1	63.1	532.2	856,433.19	404,682.87	-4.69	0.76	
3,913.0	7.96	85.73	3,867.1	758.1	64.3	545.8	856,446.82	404,684.04	-4.36	0.89	
4,007.0	7.30	85.94	3,960.2	851.2	65.2	558.3	856,459.27	404,684.95	-3.90	0.70	
4,101.0	6.87	83.81	4,053.5	944.5	66.2	569.8	856,470.82	404,685.98	-3.67	0.54	
4,196.0	7.28	86.63	4,147.8	1,038.8	67.2	581.5	856,482.48	404,686.94	-3.36	0.57	
4,289.0	7.79	87.41	4,240.0	1,131.0	67.8	593.6	856,494.65	404,687.57	-2.66	0.56	
4,384.0	8.02	86.73	4,334.1	1,225.1	68.5	606.7	856,507.70	404,688.24	-1.90	0.26	
4,479.0	7.91	80.15	4,428.2	1,319.2	70.0	619.7	856,520.76	404,689.74	-1.96	0.97	
4,572.0	8.28	82.49	4,520.2	1,411.2	71.9	632.7	856,533.70	404,691.71	-2.51	0.53	
4,666.0	7.77	76.28	4,613.3	1,504.3	74.3	645.6	856,546.59	404,694.10	-3.48	1.07	
4,760.0	7.68	73.16	4,706.5	1,597.5	77.6	657.8	856,558.77	404,697.43	-5.46	0.46	
4,854.0	8.18	76.94	4,799.6	1,690.6	81.0	670.3	856,571.30	404,700.76	-7.41	0.77	
4,947.0	8.61	78.71	4,891.6	1,782.6	83.8	683.6	856,584.57	404,703.62	-8.80	0.54	
5,041.0	9.19	78.30	4,984.4	1,875.4	86.7	697.8	856,598.82	404,706.52	-10.13	0.62	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
5,134.0	8.93	81.11	5,076.3	1,967.3	89.4	712.2	856,613.22	404,709.14	-11.16	0.55	
5,228.0	8.14	82.34	5,169.2	2,060.2	91.4	726.0	856,627.03	404,711.15	-11.66	0.86	
5,321.0	8.51	83.41	5,261.3	2,152.3	93.0	739.4	856,640.39	404,712.82	-11.86	0.43	
5,415.0	8.69	82.45	5,354.2	2,245.2	94.8	753.3	856,654.34	404,714.55	-12.06	0.24	
5,507.0	8.87	80.90	5,445.1	2,336.1	96.8	767.2	856,668.23	404,716.58	-12.57	0.32	
5,602.0	9.54	79.44	5,538.9	2,429.9	99.4	782.2	856,683.20	404,719.19	-13.52	0.75	
5,695.0	9.73	76.43	5,630.6	2,521.6	102.7	797.4	856,698.42	404,722.44	-15.10	0.58	
5,789.0	9.60	75.70	5,723.3	2,614.3	106.5	812.7	856,713.73	404,726.24	-17.21	0.19	
5,883.0	9.07	75.70	5,816.0	2,707.0	110.2	827.5	856,728.51	404,730.01	-19.34	0.56	
5,977.0	9.55	75.24	5,908.8	2,799.8	114.0	842.2	856,743.23	404,733.82	-21.53	0.52	
6,070.0	10.15	77.15	6,000.4	2,891.4	117.8	857.7	856,758.68	404,737.61	-23.61	0.73	
6,164.0	9.97	83.63	6,093.0	2,984.0	120.6	873.8	856,774.84	404,740.36	-24.58	1.22	
6,258.0	10.42	82.84	6,185.5	3,076.5	122.5	890.4	856,791.36	404,742.32	-24.73	0.50	
6,352.0	10.38	83.37	6,277.9	3,168.9	124.6	907.2	856,808.21	404,744.36	-24.91	0.11	
6,446.0	9.28	87.96	6,370.6	3,261.6	125.8	923.2	856,824.20	404,745.61	-24.41	1.44	
6,541.0	8.12	88.52	6,464.5	3,355.5	126.3	937.5	856,838.56	404,746.05	-23.29	1.22	
6,635.0	7.62	90.13	6,557.6	3,448.6	126.4	950.4	856,851.43	404,746.21	-22.04	0.58	
6,730.0	6.52	92.09	6,651.8	3,542.8	126.2	962.1	856,863.12	404,746.00	-20.56	1.19	
6,824.0	5.16	97.69	6,745.4	3,636.4	125.5	971.6	856,872.64	404,745.24	-18.76	1.57	
6,918.0	4.03	106.32	6,839.1	3,730.1	124.0	979.0	856,880.00	404,743.74	-16.47	1.41	
7,012.0	2.83	107.65	6,932.9	3,823.9	122.3	984.4	856,885.38	404,742.11	-14.27	1.28	
7,105.0	1.54	125.51	7,025.8	3,916.8	120.9	987.6	856,888.59	404,740.69	-12.50	1.55	
7,199.0	0.95	170.06	7,119.8	4,010.8	119.4	988.7	856,889.75	404,739.19	-10.88	1.16	
7,293.0	0.74	206.02	7,213.8	4,104.8	118.1	988.6	856,889.62	404,737.87	-9.59	0.59	
7,386.0	0.68	211.31	7,306.8	4,197.8	117.1	988.1	856,889.07	404,736.86	-8.65	0.10	
7,480.0	0.62	198.08	7,400.8	4,291.8	116.1	987.6	856,888.62	404,735.90	-7.74	0.17	
7,575.0	0.68	239.99	7,495.8	4,386.8	115.4	987.0	856,887.97	404,735.13	-7.05	0.49	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
7,670.0	0.71	271.49	7,590.8	4,481.8	115.1	985.9	856,886.89	404,734.87	-6.90	0.40	
7,764.0	0.68	275.64	7,684.8	4,575.8	115.2	984.7	856,885.76	404,734.94	-7.09	0.06	
7,857.0	0.50	248.93	7,777.7	4,668.7	115.1	983.8	856,884.83	404,734.84	-7.10	0.35	
7,951.0	0.24	298.34	7,871.7	4,762.7	115.0	983.3	856,884.27	404,734.79	-7.11	0.41	
8,046.0	0.35	347.17	7,966.7	4,857.7	115.4	983.0	856,884.03	404,735.17	-7.51	0.28	
8,139.0	0.20	48.88	8,059.7	4,950.7	115.8	983.1	856,884.09	404,735.55	-7.89	0.33	
8,233.0	0.72	43.17	8,153.7	5,044.7	116.3	983.6	856,884.62	404,736.09	-8.36	0.55	
8,327.0	0.50	48.06	8,247.7	5,138.7	117.0	984.3	856,885.33	404,736.80	-8.99	0.24	
8,421.0	0.46	99.77	8,341.7	5,232.7	117.2	985.0	856,886.01	404,737.01	-9.12	0.45	
8,515.0	0.79	107.74	8,435.7	5,326.7	117.0	986.0	856,887.00	404,736.74	-8.75	0.36	
8,703.0	0.64	66.60	8,623.7	5,514.7	117.0	988.2	856,889.19	404,736.77	-8.54	0.28	
8,796.0	0.64	33.99	8,716.7	5,607.7	117.6	989.0	856,889.96	404,737.40	-9.09	0.39	
8,889.0	0.47	60.50	8,809.7	5,700.7	118.2	989.6	856,890.58	404,738.02	-9.63	0.33	
8,984.0	0.58	38.84	8,904.7	5,795.7	118.8	990.2	856,891.22	404,738.59	-10.13	0.24	
9,077.0	0.26	283.68	8,997.7	5,888.7	119.2	990.3	856,891.31	404,739.00	-10.53	0.78	
9,142.0	0.49	274.70	9,062.7	5,953.7	119.3	989.9	856,890.89	404,739.06	-10.63	0.36	
9,239.0	0.50	281.60	9,159.7	6,050.7	119.4	989.1	856,890.07	404,739.18	-10.84	0.06	
9,332.0	0.80	243.90	9,252.7	6,143.7	119.2	988.1	856,889.08	404,738.98	-10.75	0.55	
9,427.0	1.10	247.40	9,347.7	6,238.7	118.6	986.6	856,887.65	404,738.33	-10.26	0.32	
9,521.0	1.50	257.20	9,441.7	6,332.7	117.9	984.6	856,885.61	404,737.72	-9.87	0.49	
9,616.0	1.60	256.60	9,536.6	6,427.6	117.4	982.1	856,883.11	404,737.13	-9.56	0.11	
9,710.0	1.20	268.60	9,630.6	6,521.6	117.0	979.8	856,880.85	404,736.80	-9.48	0.53	
9,806.0	0.80	281.00	9,726.6	6,617.6	117.1	978.2	856,879.19	404,736.91	-9.77	0.47	
9,900.0	0.80	280.00	9,820.6	6,711.6	117.4	976.9	856,877.90	404,737.15	-10.15	0.01	
9,994.0	0.90	289.10	9,914.6	6,805.6	117.7	975.5	856,876.55	404,737.50	-10.65	0.18	
10,088.0	1.20	300.60	10,008.5	6,899.5	118.5	974.0	856,875.01	404,738.25	-11.55	0.39	
10,181.0	1.40	307.90	10,101.5	6,992.5	119.7	972.3	856,873.27	404,739.44	-12.93	0.28	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
10,274.0	1.60	324.70	10,194.5	7,085.5	121.4	970.6	856,871.63	404,741.20	-14.86	0.52	
10,367.0	1.80	342.00	10,287.4	7,178.4	123.9	969.4	856,870.43	404,743.65	-17.42	0.59	
10,461.0	1.20	319.20	10,381.4	7,272.4	126.0	968.3	856,869.33	404,745.79	-19.68	0.89	
10,555.0	1.20	205.90	10,475.4	7,366.4	125.9	967.2	856,868.25	404,745.65	-19.65	2.13	
10,649.0	2.40	221.60	10,569.4	7,460.4	123.5	965.5	856,866.52	404,743.30	-17.50	1.37	
10,743.0	3.90	231.30	10,663.2	7,554.2	120.0	961.7	856,862.72	404,739.83	-14.47	1.69	
10,837.0	4.80	228.50	10,756.9	7,647.9	115.4	956.3	856,857.27	404,735.22	-10.48	0.98	
10,932.0	3.30	232.50	10,851.7	7,742.7	111.1	951.1	856,852.13	404,730.92	-6.77	1.61	
11,026.0	2.90	240.90	10,945.6	7,836.6	108.3	946.9	856,847.90	404,728.12	-4.44	0.64	
11,120.0	3.80	245.40	11,039.4	7,930.4	105.9	942.0	856,842.99	404,725.67	-2.54	1.00	
11,214.0	3.60	230.70	11,133.2	8,024.2	102.7	936.9	856,837.88	404,722.50	0.05	1.03	
11,309.0	3.00	223.80	11,228.0	8,119.0	99.0	932.8	856,833.85	404,718.82	3.27	0.76	
11,404.0	2.50	224.50	11,322.9	8,213.9	95.8	929.7	856,830.68	404,715.54	6.18	0.53	
11,499.0	2.20	230.60	11,417.9	8,308.9	93.1	926.8	856,827.82	404,712.91	8.49	0.41	
11,595.0	5.90	185.40	11,513.6	8,404.6	87.0	924.9	856,825.93	404,706.82	14.33	4.81	
11,689.0	17.90	180.70	11,605.4	8,496.4	67.7	924.3	856,825.29	404,687.50	33.47	12.80	
11,783.0	27.90	180.00	11,691.9	8,582.9	31.2	924.1	856,825.12	404,650.97	69.76	10.64	
11,877.0	36.00	173.40	11,771.6	8,662.6	-18.3	927.3	856,828.30	404,601.44	119.35	9.37	
11,971.0	42.40	172.10	11,844.4	8,735.4	-77.2	934.8	856,835.84	404,542.54	178.71	6.86	
12,066.0	47.10	170.40	11,911.9	8,802.9	-143.3	945.0	856,846.05	404,476.47	245.51	5.10	
12,161.0	54.20	168.40	11,972.1	8,863.1	-215.5	958.6	856,859.62	404,404.32	318.70	7.65	
12,255.0	62.30	168.20	12,021.5	8,912.5	-293.7	974.8	856,875.82	404,326.12	398.21	8.62	
12,348.0	68.10	170.70	12,060.5	8,951.5	-376.6	990.2	856,891.22	404,243.16	482.35	6.70	
12,442.0	77.60	172.80	12,088.2	8,979.2	-465.4	1,003.0	856,904.06	404,154.37	572.01	10.33	
12,536.0	81.40	173.30	12,105.3	8,996.3	-557.1	1,014.2	856,915.23	404,062.64	664.41	4.08	
12,630.0	84.10	175.50	12,117.2	9,008.2	-649.9	1,023.3	856,924.33	403,969.85	757.64	3.69	
12,756.0	85.00	178.10	12,129.2	9,020.2	-775.2	1,030.3	856,931.33	403,844.62	882.88	2.17	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
12,851.0	86.60	180.20	12,136.1	9,027.1	-869.9	1,031.7	856,932.73	403,749.90	977.19	2.77
12,944.0	87.00	181.30	12,141.3	9,032.3	-962.7	1,030.5	856,931.51	403,657.05	1,069.35	1.26
13,037.0	85.60	181.70	12,147.3	9,038.3	-1,055.5	1,028.1	856,929.09	403,564.28	1,161.31	1.57
13,131.0	84.10	181.50	12,155.7	9,046.7	-1,149.1	1,025.5	856,926.47	403,470.70	1,254.04	1.61
13,227.0	84.40	181.30	12,165.4	9,056.4	-1,244.6	1,023.1	856,924.14	403,375.21	1,348.71	0.37
13,321.0	89.50	179.50	12,170.4	9,061.4	-1,338.4	1,022.5	856,923.49	403,281.38	1,441.91	5.75
13,415.0	92.60	179.30	12,168.6	9,059.6	-1,432.4	1,023.5	856,924.47	403,187.41	1,535.42	3.30
13,510.0	94.10	177.90	12,163.1	9,054.1	-1,527.2	1,025.8	856,926.79	403,092.61	1,629.91	2.16
13,603.0	95.50	177.80	12,155.3	9,046.3	-1,619.8	1,029.3	856,930.26	403,000.00	1,722.35	1.51
13,698.0	97.20	177.60	12,144.8	9,035.8	-1,714.1	1,033.0	856,934.05	402,905.67	1,816.54	1.80
13,792.0	97.50	177.20	12,132.8	9,023.8	-1,807.2	1,037.3	856,938.28	402,812.53	1,909.57	0.53
13,887.0	98.00	176.80	12,120.0	9,011.0	-1,901.2	1,042.2	856,943.21	402,718.53	2,003.55	0.67
13,982.0	96.00	177.10	12,108.4	8,999.4	-1,995.4	1,047.2	856,948.22	402,624.38	2,097.69	2.13
14,075.0	94.20	177.10	12,100.1	8,991.1	-2,087.9	1,051.9	856,952.91	402,531.87	2,190.16	1.94
14,169.0	94.90	176.80	12,092.7	8,983.7	-2,181.5	1,056.9	856,957.89	402,438.30	2,283.72	0.81
14,264.0	93.10	177.30	12,086.0	8,977.0	-2,276.1	1,061.8	856,962.77	402,343.66	2,378.32	1.97
14,359.0	87.60	178.00	12,085.5	8,976.5	-2,371.0	1,065.7	856,966.66	402,248.78	2,473.06	5.84
14,452.0	87.70	178.90	12,089.3	8,980.3	-2,463.9	1,068.2	856,969.18	402,155.89	2,565.67	0.97
14,547.0	88.30	180.30	12,092.6	8,983.6	-2,558.8	1,068.8	856,969.84	402,060.96	2,660.11	1.60
14,641.0	92.30	182.20	12,092.1	8,983.1	-2,652.8	1,066.8	856,967.79	401,967.00	2,753.28	4.71
14,735.0	92.40	182.30	12,088.2	8,979.2	-2,746.6	1,063.1	856,964.10	401,873.15	2,846.17	0.15
14,829.0	94.20	181.30	12,082.8	8,973.8	-2,840.4	1,060.1	856,961.16	401,779.36	2,939.08	2.19
14,923.0	94.10	180.00	12,076.0	8,967.0	-2,934.2	1,059.1	856,960.09	401,685.62	3,032.15	1.38
15,017.0	91.30	180.00	12,071.6	8,962.6	-3,028.1	1,059.1	856,960.09	401,591.73	3,125.48	2.98
15,111.0	89.00	178.70	12,071.4	8,962.4	-3,122.0	1,060.1	856,961.16	401,497.74	3,219.02	2.81
15,205.0	87.00	178.20	12,074.6	8,965.6	-3,215.9	1,062.7	856,963.70	401,403.84	3,312.64	2.19
15,299.0	84.80	177.70	12,081.4	8,972.4	-3,309.6	1,066.0	856,967.05	401,310.15	3,406.14	2.40



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
15,392.0	81.60	177.80	12,092.4	8,983.4	-3,401.9	1,069.7	856,970.68	401,217.88	3,498.25	3.44	
15,487.0	80.70	177.30	12,107.0	8,998.0	-3,495.7	1,073.7	856,974.69	401,124.10	3,591.91	1.08	
15,581.0	81.70	178.60	12,121.4	9,012.4	-3,588.5	1,077.0	856,978.01	401,031.27	3,684.55	1.73	
15,675.0	82.20	178.60	12,134.5	9,025.5	-3,681.6	1,079.3	856,980.28	400,938.23	3,777.29	0.53	
15,769.0	84.50	179.80	12,145.4	9,036.4	-3,774.9	1,080.6	856,981.59	400,844.88	3,870.22	2.76	
15,862.0	84.20	179.50	12,154.6	9,045.6	-3,867.5	1,081.1	856,982.15	400,752.33	3,962.28	0.46	
15,957.0	87.60	180.40	12,161.4	9,052.4	-3,962.2	1,081.2	856,982.23	400,657.59	4,056.46	3.70	
16,051.0	88.70	181.00	12,164.4	9,055.4	-4,056.1	1,080.1	856,981.08	400,563.65	4,149.72	1.33	
16,145.0	88.30	180.80	12,166.9	9,057.9	-4,150.1	1,078.6	856,979.61	400,469.69	4,242.96	0.48	
16,240.0	90.20	180.90	12,168.1	9,059.1	-4,245.1	1,077.2	856,978.20	400,374.71	4,337.21	2.00	
16,335.0	89.90	180.80	12,168.0	9,059.0	-4,340.1	1,075.8	856,976.79	400,279.72	4,431.48	0.33	
16,430.0	87.00	180.00	12,170.6	9,061.6	-4,435.0	1,075.1	856,976.13	400,184.77	4,525.80	3.17	
16,524.0	89.30	179.20	12,173.6	9,064.6	-4,529.0	1,075.8	856,976.78	400,090.83	4,619.25	2.59	
16,661.0	89.00	178.00	12,175.7	9,066.7	-4,665.9	1,079.1	856,980.13	399,953.89	4,755.74	0.90	
16,756.0	88.90	177.80	12,177.4	9,068.4	-4,760.8	1,082.6	856,983.61	399,858.97	4,850.47	0.24	
16,850.0	89.10	177.60	12,179.0	9,070.0	-4,854.7	1,086.4	856,987.38	399,765.06	4,944.23	0.30	
16,944.0	88.70	178.70	12,180.8	9,071.8	-4,948.7	1,089.4	856,990.42	399,671.13	5,037.94	1.24	
17,037.0	88.30	177.40	12,183.3	9,074.3	-5,041.6	1,092.6	856,993.58	399,578.21	5,130.64	1.46	
17,131.0	88.60	177.00	12,185.8	9,076.8	-5,135.4	1,097.2	856,998.17	399,484.36	5,224.43	0.53	
17,224.0	88.20	177.90	12,188.4	9,079.4	-5,228.3	1,101.3	857,002.31	399,391.49	5,317.20	1.06	
17,318.0	89.20	178.70	12,190.5	9,081.5	-5,322.2	1,104.1	857,005.09	399,297.56	5,410.88	1.36	
17,412.0	86.40	177.60	12,194.2	9,085.2	-5,416.1	1,107.1	857,008.12	399,203.69	5,504.52	3.20	
17,506.0	88.20	178.50	12,198.6	9,089.6	-5,509.9	1,110.3	857,011.32	399,109.85	5,598.14	2.14	
17,600.0	92.30	182.20	12,198.2	9,089.2	-5,603.9	1,109.7	857,010.75	399,015.89	5,691.48	5.87	
17,694.0	94.90	182.20	12,192.3	9,083.3	-5,697.6	1,106.1	857,007.14	398,922.15	5,784.27	2.77	
17,789.0	97.10	181.70	12,182.3	9,073.3	-5,792.0	1,102.9	857,003.93	398,827.73	5,877.77	2.37	
17,884.0	97.40	182.20	12,170.4	9,061.4	-5,886.2	1,099.7	857,000.72	398,733.55	5,971.05	0.61	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
17,978.0	98.40	182.80	12,157.4	9,048.4	-5,979.3	1,095.7	856,996.66	398,640.53	6,063.07	1.24	
18,071.0	96.90	181.40	12,145.1	9,036.1	-6,071.4	1,092.3	856,993.29	398,548.42	6,154.26	2.20	
18,166.0	97.10	180.90	12,133.5	9,024.5	-6,165.6	1,090.4	856,991.39	398,454.15	6,247.76	0.56	
18,260.0	96.80	181.00	12,122.1	9,013.1	-6,258.9	1,088.8	856,989.85	398,360.86	6,340.33	0.34	
18,355.0	96.40	180.70	12,111.2	9,002.2	-6,353.3	1,087.4	856,988.45	398,266.50	6,433.98	0.53	
18,450.0	96.40	180.70	12,100.6	8,991.6	-6,447.7	1,086.3	856,987.29	398,172.09	6,527.69	0.00	
18,546.0	96.60	180.80	12,089.7	8,980.7	-6,543.1	1,085.0	856,986.04	398,076.72	6,622.36	0.23	
18,640.0	94.20	179.20	12,080.9	8,971.9	-6,636.6	1,085.0	856,986.05	397,983.15	6,715.37	3.06	
18,735.0	92.10	177.30	12,075.7	8,966.7	-6,731.4	1,087.9	856,988.95	397,888.34	6,809.93	2.98	
18,831.0	91.90	177.10	12,072.3	8,963.3	-6,827.3	1,092.6	856,993.63	397,792.52	6,905.69	0.29	
18,925.0	92.20	177.00	12,068.9	8,959.9	-6,921.1	1,097.5	856,998.47	397,698.70	6,999.48	0.34	
19,019.0	90.40	177.20	12,066.8	8,957.8	-7,014.9	1,102.2	857,003.22	397,604.85	7,093.29	1.93	
19,114.0	87.40	175.10	12,068.6	8,959.6	-7,109.7	1,108.6	857,009.60	397,510.10	7,188.17	3.85	
19,209.0	89.10	176.60	12,071.5	8,962.5	-7,204.4	1,115.5	857,016.47	397,415.40	7,283.05	2.39	
19,305.0	91.60	179.00	12,070.9	8,961.9	-7,300.3	1,119.1	857,020.15	397,319.49	7,378.80	3.61	
19,399.0	89.20	176.80	12,070.3	8,961.3	-7,394.2	1,122.6	857,023.60	397,225.56	7,472.53	3.46	
19,493.0	92.50	178.40	12,068.9	8,959.9	-7,488.1	1,126.5	857,027.53	397,131.67	7,566.29	3.90	
19,587.0	92.30	178.10	12,065.0	8,956.0	-7,582.0	1,129.4	857,030.40	397,037.80	7,659.92	0.38	
19,682.0	92.50	178.60	12,061.0	8,952.0	-7,676.9	1,132.1	857,033.13	396,942.92	7,754.53	0.57	
19,777.0	92.00	177.50	12,057.3	8,948.3	-7,771.7	1,135.4	857,036.36	396,848.05	7,849.19	1.27	
19,871.0	90.20	179.60	12,055.4	8,946.4	-7,865.7	1,137.7	857,038.74	396,754.11	7,942.83	2.94	
19,967.0	89.80	180.20	12,055.4	8,946.4	-7,961.7	1,137.9	857,038.91	396,658.11	8,038.27	0.75	
20,062.0	90.30	181.00	12,055.4	8,946.4	-8,056.7	1,136.9	857,037.91	396,563.12	8,132.59	0.99	
20,156.0	89.30	180.60	12,055.7	8,946.7	-8,150.7	1,135.6	857,036.60	396,469.13	8,225.88	1.15	
20,252.0	88.40	179.60	12,057.6	8,948.6	-8,246.6	1,135.4	857,036.43	396,373.15	8,321.27	1.40	
20,347.0	90.50	181.30	12,058.5	8,949.5	-8,341.6	1,134.7	857,035.69	396,278.16	8,415.60	2.84	
20,442.0	90.50	181.70	12,057.7	8,948.7	-8,436.6	1,132.2	857,033.20	396,183.20	8,509.73	0.42	



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 12H
Project:	Sioux 25-36 State Fed Com 12H	TVD Reference:	well @ 3109.0usft
Site:	Sioux 25-36 State Fed Com 12H	MD Reference:	well @ 3109.0usft
Well:	Sioux 25-36 State Fed Com 12H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 12H	Survey Calculation Method:	Minimum Curvature
Design:	Sioux 25-36 State Fed Com 12H	Database:	EDM 5000.1 Single User Db

Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)	
20,535.0	89.40	181.10	12,057.8	8,948.8	-8,529.5	1,129.9	857,030.93	396,090.23	8,601.90	1.35	
20,630.0	90.60	180.50	12,057.8	8,948.8	-8,624.5	1,128.6	857,029.60	395,995.24	8,696.17	1.41	
20,725.0	90.70	180.20	12,056.7	8,947.7	-8,719.5	1,128.0	857,029.02	395,900.25	8,790.54	0.33	
20,820.0	92.40	180.90	12,054.1	8,945.1	-8,814.5	1,127.1	857,028.11	395,805.29	8,884.83	1.94	
20,915.0	90.70	180.10	12,051.6	8,942.6	-8,909.4	1,126.3	857,027.28	395,710.34	8,979.13	1.98	
21,010.0	91.50	178.70	12,049.7	8,940.7	-9,004.4	1,127.3	857,028.28	395,615.36	9,073.65	1.70	
21,105.0	92.00	179.20	12,046.8	8,937.8	-9,099.4	1,129.0	857,030.02	395,520.42	9,168.21	0.74	
21,199.0	93.20	178.50	12,042.6	8,933.6	-9,193.2	1,130.9	857,031.90	395,426.54	9,261.74	1.48	
21,294.0	92.80	178.80	12,037.6	8,928.6	-9,288.1	1,133.1	857,034.14	395,331.70	9,356.26	0.53	
21,388.0	90.70	176.20	12,034.7	8,925.7	-9,381.9	1,137.2	857,038.23	395,237.84	9,450.00	3.55	
21,483.0	91.40	175.10	12,033.0	8,924.0	-9,476.6	1,144.4	857,045.44	395,143.14	9,544.93	1.37	
21,579.0	90.90	173.70	12,031.1	8,922.1	-9,572.2	1,153.8	857,054.80	395,047.62	9,640.90	1.55	
21,673.0	91.60	177.40	12,029.0	8,920.0	-9,665.8	1,161.1	857,062.10	394,953.94	9,734.81	4.01	
21,769.0	92.50	178.10	12,025.6	8,916.6	-9,761.7	1,164.9	857,065.86	394,858.08	9,830.51	1.19	
21,862.0	94.20	178.80	12,020.1	8,911.1	-9,854.5	1,167.4	857,068.37	394,765.27	9,923.04	1.98	
21,957.0	92.70	177.40	12,014.4	8,905.4	-9,949.3	1,170.5	857,071.52	394,670.50	10,017.59	2.16	
22,052.0	93.50	178.10	12,009.3	8,900.3	-10,044.1	1,174.2	857,075.24	394,575.72	10,112.21	1.12	
22,146.0	92.50	176.40	12,004.4	8,895.4	-10,137.8	1,178.7	857,079.75	394,481.96	10,205.90	2.10	
22,241.0	93.10	176.10	11,999.7	8,890.7	-10,232.5	1,184.9	857,085.95	394,387.27	10,300.70	0.71	
22,290.0	93.20	176.20	11,997.0	8,888.0	-10,281.3	1,188.2	857,089.24	394,338.46	10,349.58	0.29	
22,350.0	93.20	176.20	11,993.7	8,884.7	-10,341.1	1,192.2	857,093.21	394,278.68	10,409.43	0.00	

Checked By: _____ Approved By: _____ Date: _____

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 16417

CONDITIONS OF APPROVAL

Operator:	OGRID:	Action Number:	Action Type:
CAZA OPERATING, LLC 200 N Loraine St Suite 1550 Midland, TX79701	249099	16417	C-104C
OCD Reviewer	Condition		
plmartinez	None		