

Form 3160-3
(June 2015)

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No.
1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator		8. Lease Name and Well No.
3a. Address		9. API Well No. 30 015 48232
3b. Phone No. (include area code)		10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
		13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		Office

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Continued on page 2)

*(Instructions on page 2)

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to a new evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SENE / 2531 FNL / 25 FEL / TWSP: 23S / RANGE: 28E / SECTION: 2 / LAT: 32.3350485 / LONG: -104.0493651 (TVD: 0 feet, MD: 0 feet)

PPP: NWSW / 1914 FSL / 0 FWL / TWSP: 23S / RANGE: 28E / SECTION: 1 / LAT: 32.332583 / LONG: -104.049182 (TVD: 9585 feet, MD: 10382 feet)

PPP: NESE / 1786 FSL / 406 FEL / TWSP: 23S / RANGE: 28E / SECTION: 2 / LAT: 32.3324117 / LONG: -104.0505982 (TVD: 9362 feet, MD: 9519 feet)

BHL: NESE / 1914 FSL / 10 FEL / TWSP: 23S / RANGE: 29E / SECTION: 6 / LAT: 32.3322108 / LONG: -104.0156014 (TVD: 9585 feet, MD: 20406 feet)

BLM Point of Contact

Name: Deborah Ham

Title: Legal Landlaw Examiner

Phone: (575) 234-5965

Email: dham@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

**OPERATOR'S NAME: Novo Oil & Gas Northern Delaware, LLC
LEASE NO.: NMNM 091078
LOCATION: Section 2, T.23 S., R.28 E., NMPM
COUNTY: Eddy County, New Mexico**

Rana Salada Fed Com 0106 136H

Surface Hole Location: 2531 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 1914 ft. FSL and 10 ft. FEL; Section 6, T. 23 S., R. 29 E.

Rana Salada Fed Com 0106 216H

Surface Hole Location: 2491 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 2310 ft. FSL and 130 ft. FEL; Section 6, T. 23 S., R. 29 E.

Rana Salada Fed Com 0106 226H

Surface Hole Location: 2511 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 1914 ft. FSL and 130 ft. FEL; Section 6, T. 23 S., R. 29 E.

Rana Salada Fed Com 01 135H

Surface Hole Location: 2451 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 2310 ft. FNL and 10 ft. FEL; Section 1, T. 23 S., R. 28 E.

Rana Salada Fed Com 01 215H

Surface Hole Location: 2431 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 1914 ft. FNL and 130 ft. FEL; Section 1, T. 23 S., R. 28 E.

Rana Salada Fed Com 01 225H

Surface Hole Location: 2471 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 2310 ft. FNL and 130 ft. FEL; Section 1, T. 23 S., R. 28 E.

Rana Salada Fed Com 01 235H

Surface Hole Location: 2281 ft. FNL and 25 ft. FEL; Section 2, T. 23 S., R. 28 E.
Bottom Hole Location: 2178 ft. FNL and 130 ft. FEL; Section 1, T. 23 S., R. 28 E.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Cave/Karst
 - Hydrology
 - Potash Resources
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for

acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Potash Resources:

Lessees must comply with the 2012 Secretarial Potash Order. The Order is designed to manage the efficient development of oil, gas, and potash resources. Section 6 of the Order provides general provisions which must be followed to minimize conflict between the industries and ensure the safety of operations.

To minimize impacts to potash resources, the proposed well is confined within the boundaries of the established Rana Salada 01 Drill Island.

Hydrology:

The entire well pad(s) will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. The compacted berm shall be constructed at a minimum of 12 inches with impermeable mineral material (e.g. caliche). Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed. Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control. If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank or 24 hour production, whichever is greater. Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production:

Construction:

General Construction:

- No blasting

- The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction, and no additional construction shall occur until clearance has been issued by the Authorized Officer.
- All linear surface disturbance activities will avoid sinkholes and other karst features to lessen the possibility of encountering near surface voids during construction, minimize changes to runoff, and prevent untimely leaks and spills from entering the karst drainage system.
- All spills or leaks will be reported to the BLM immediately for their immediate and proper treatment.

Pad Construction:

- The pad will be constructed and leveled by adding the necessary fill and caliche – no blasting.
- The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.
- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g., caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised (i.e. an access road crossing the berm cannot be lower than the berm height).
- Following a rain event, all fluids will vacuumed off of the pad and hauled off-site and disposed at a proper disposal facility.

Tank Battery Construction:

- The pad will be constructed and leveled by adding the necessary fill and caliche – no blasting.
- All tank battery locations and facilities will be lined and bermed.
- The liner should be at least 20 mil in thickness and installed with a 4 oz. felt backing, or equivalent, to prevent tears or punctures.
- Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Road Construction:

- Turnout ditches and drainage leadoffs will not be constructed in such a manner as to alter the natural flow of water into or out of cave or karst features.
- Special restoration stipulations or realignment may be required if subsurface features are discovered during construction.

Buried Pipeline/Cable Construction:

- Rerouting of the buried line(s) may be required if a subsurface void is encountered during construction to minimize the potential subsidence/collapse of the feature(s) as well as the possibility of leaks/spills entering the karst drainage system.

Powerline Construction:

- Smaller powerlines will be routed around sinkholes and other karst features to avoid or lessen the possibility of encountering near surface voids and to minimize changes to runoff or possible leaks and spills from entering karst systems.
- Larger powerlines will adjust their pole spacing to avoid cave and karst features.
- Special restoration stipulations or realignment may be required if subsurface voids are encountered.

Surface Flowlines Installation:

- Flowlines will be routed around sinkholes and other karst features to minimize the possibility of leaks/spills from entering the karst drainage system.

Leak Detection System:

- A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present.
- A leak detection plan will be submitted to BLM that incorporates an automatic shut off system (see below) to minimize the effects of an undesirable event that could negatively sensitive cave/karst resources.
- Well heads, pipelines (surface and buried), storage tanks, and all supporting equipment should be monitored regularly after installation to promptly identify and fix leaks.

Automatic Shut-off Systems:

- Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and groundwater concerns:

Closed Loop System:

- A closed loop system using steel tanks will be utilized during drilling – no pits
- All fluids and cuttings will be hauled off-site and disposed of properly at an authorized site

Rotary Drilling with Fresh Water:

- Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

- The kick off point for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

- ALL lost circulation zones between surface and the base of the cave occurrence zone will be logged and reported in the drilling report.
- If a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, regardless of the type of drilling machinery used, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

- Additional plugging conditions of approval may be required upon well abandonment in high and medium karst potential occurrence zones.
- The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

- The operator will perform annual pressure monitoring on all casing annuli and reported in a sundry notice.
- If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out-sloping and in-sloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

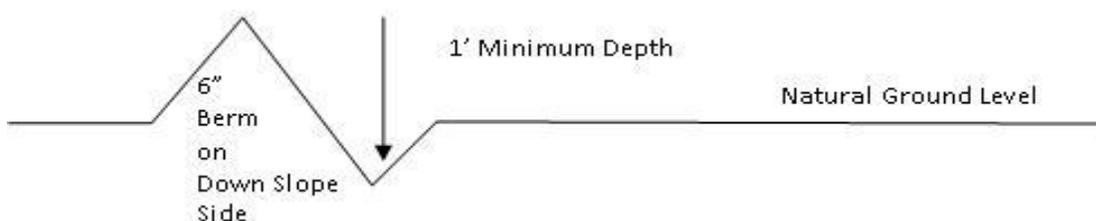

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the

private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

- Construction Steps**
1. Salvage topsoil
 2. Construct road
 3. Redistribute topsoil
 4. Revegetate slopes

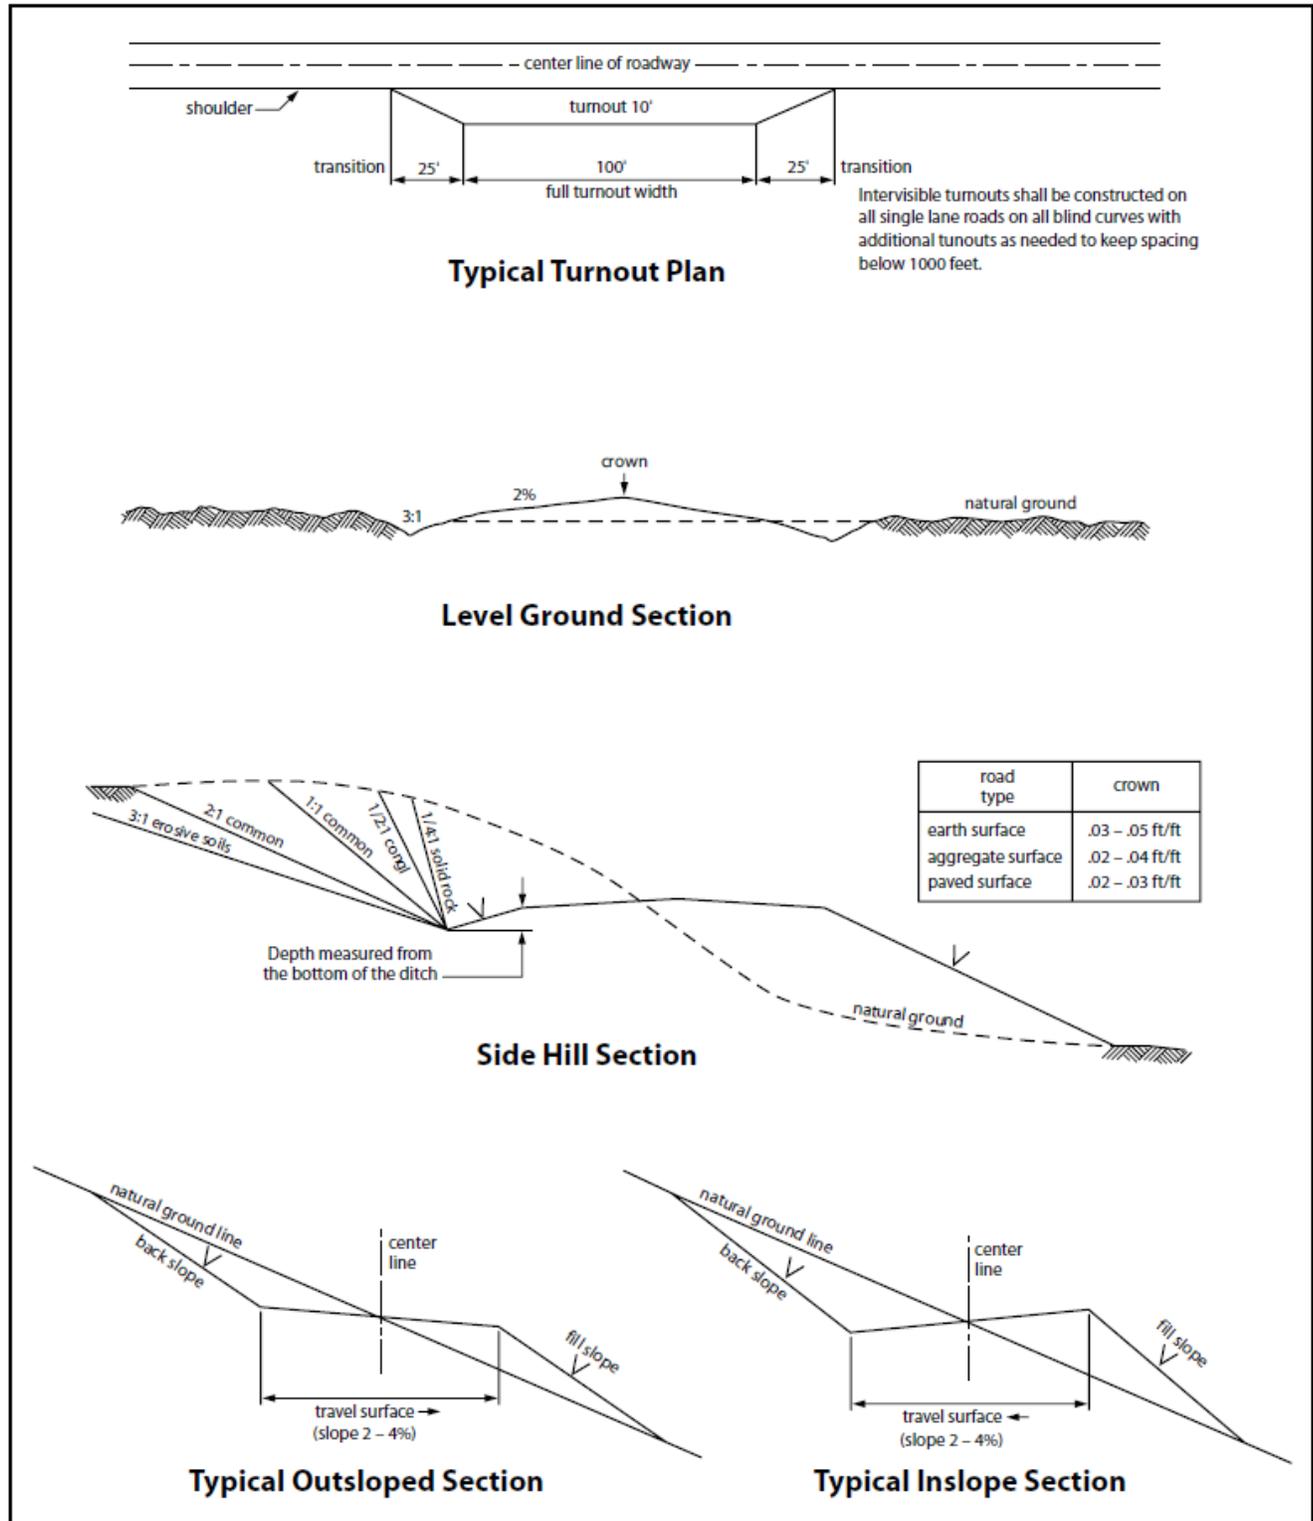


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production

equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	lb/acre
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	NOVO OIL AND GAS
LEASE NO.:	NMNM091078
WELL NAME & NO.:	RANA SALADA 0106 FED COM 136H
SURFACE HOLE FOOTAGE:	2531'/N & 25'/E
BOTTOM HOLE FOOTAGE:	1914'/S & 10'/E
LOCATION:	Section 2, T.23 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input type="radio"/> None	<input checked="" type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **279** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of

- 24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate Casing must be kept fluid filled to meet BLM Collapse Factor.

2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. **Excess cement calculates to 19%, additional cement might be required.**
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ In Secretary Potash Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Alternate Production casing has been reviewed and approved.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement should tie-back at least **500 feet** into previous casing string. Operator shall provide method of verification. **Excess cement calculates to 20%, additional cement might be required.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
 (575) 361-2822

Lea County
 Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
 393-3612

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

- a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours.

WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JJP03252021

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 8/18/2020

X Original Operator & OGRID No.: Novo Oil & Gas Northern Delaware, LLC (372920)

Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: A C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule 19.15.18.12.A

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well	API	SHL (ULSTR)	SHL Footages	Expected MCF/D	Flared or Vented	Comments
Rana Salada Fed 01 135H	30-015-	H-2-23S-28E	2451 FNL & 25 FEL	750	30 days	Time depends on well clean up
Rana Salada Fed 01 215H	30-015-	H-2-23S-28E	2431 FNL & 25 FEL	3500	30 days	Time depends on well clean up
Rana Salada Fed 01 225H	30-015-	H-2-23S-28E	2471 sFNL & 25 FEL	3500	30 days	Time depends on well clean up
Rana Salada Fed 01 235H	30-015-	H-2-23S-28E	2281 FNL & 25 FEL	3500	30 days	Time depends on well clean up
Rana Salada Fed Com 0106 136H	30-015-	H-2-23S-28E	2531 FNL & 25 FEL	750	30 days	Time depends on well clean up
Rana Salada Fed Com 0106 216H	30-015-	H-2-23S-28E	2491 FNL & 25 FEL	3500	30 days	Time depends on well clean up
Rana Salada Fed Com 0106 226H	30-015-	H-2-23S-28E	2511 FNL & 25 FEL	3500	30 days	Time depends on well clean up

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. Gas from the pad will be piped southeast ≈ 2 miles to an existing Enterprise Field Services L. L. C. (151618) line in SESE 6-23s-29e. Final route depends on archaeology and botany inspection results. Novo Oil & Gas Northern Delaware, LLC will provide (periodically) to its Gas Transporter a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Novo Oil & Gas Northern Delaware, LLC and its Gas Transporter have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at an as yet undetermined Gas Transporter Processing Plant located in Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on its Gas Transporter system at that time. Based on current information, it is Novo Oil & Gas Northern Delaware, LLC's belief an existing or new system can take this gas upon completion of the well(s). Safety requirements during cleanout operations from using underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/20/2021

APD ID: 10400060789

Submission Date: 08/24/2020

Highlighted data
reflects the most
recent changes

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
834772	QUATERNARY	3079	-10	0	OTHER : None	USEABLE WATER	N
834773	RUSTLER ANHYDRITE	2857	222	222	ANHYDRITE	NONE	N
834774	CASTILE	1191	1888	1889	SALT	NONE	N
834775	LAMAR	331	2748	2773	LIMESTONE	NONE	N
834776	BELL CANYON	307	2772	2798	SANDSTONE	NATURAL GAS, OIL	N
834777	CHERRY CANYON	-713	3792	3851	SANDSTONE	NATURAL GAS, OIL	N
834778	BRUSHY CANYON	-2163	5242	5347	SANDSTONE	NATURAL GAS, OIL	N
834779	BONE SPRING	-3233	6312	6442	LIMESTONE	NATURAL GAS, OIL	N
834780	AVALON SAND	-3913	6992	7123	SHALE	NATURAL GAS, OIL	N
834781	BONE SPRING 1ST	-4333	7412	7543	SANDSTONE	NATURAL GAS, OIL	N
834782	BONE SPRING 2ND	-4583	7662	7793	OTHER : Carbonate	NATURAL GAS, OIL	N
834783	BONE SPRING 2ND	-5038	8117	8248	SANDSTONE	NATURAL GAS, OIL	N
834784	BONE SPRING 3RD	-5403	8482	8613	OTHER : Carbonate	NATURAL GAS, OIL	N
834785	BONE SPRING 3RD	-6283	9362	9519	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

Pressure Rating (PSI): 5M

Rating Depth: 10000

Equipment: A 13.625 5,000-psi BOP system will be installed on a multi-bowl (speed head) wellhead with a 13.625 flanged casing spool. Top flange of casing spool will be set in a cellar below ground level. BOP system will consist of a single pipe ram on the bottom, mud cross, double pipe ram with blind rams on bottom and pipe rams on top, and annular preventer. Blowout preventer will be installed on top of the 13.375 surface casing and will remain installed to TD of the well. Wellhead, blowout preventer, and choke manifold diagram are included.

Requesting Variance? YES

Variance request: Variance is requested to use a co-flex hose between the BOP system and choke manifold. A typical co-flex pressure test certificate is attached. An equipment specific co-flex pressure test certificate will be on site when testing the BOP.

Testing Procedure: BOP system will be isolated with a test plug and tested by an independent tester to 250-psi low and 5000-psi high for 10 minutes. Surface casing will be pressure tested to 250-psi low and 1500-psi high. Intermediate casing will be pressure tested to 250-psi low and (0.22 psi x shoe TVD which is equivalent to 1954.7 psi) high for 30 minutes. All casing strings will be tested in accordance with Onshore Order 2 III.B.1.h.

Choke Diagram Attachment:

RS_0106_136H_Choke_20200824085320.pdf

BOP Diagram Attachment:

RS_0106_136H_BOP_20200824085327.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	400	0	400	0	-400	400	J-55	54.5	BUTT	1.125	1.125	DRY	1.6	DRY	1.6
2	INTERMEDIATE	9.875	8.625	NEW	API	N	0	8885	0	8754	3079	-8754	8885	OTHER	32	OTHER - TLW	1.125	1.125	DRY	1.6	DRY	1.6
3	PRODUCTION	7.875	5.5	NEW	API	N	0	20405	0	9585	3079	-9585	20405	OTHER	20	OTHER - DWC/C-IS Plus	1.125	1.125	DRY	1.6	DRY	1.6

Casing Attachments

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

RS_0106_136H_Casing_Design_Assumptions_20200824085353.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

RS_0106_136H_Casing_Design_Assumptions_20200824085523.pdf

8.625_P_110_HSCY_20200824085529.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

RS_0106_136H_Casing_Design_Assumptions_20200824085609.pdf

5.5in_P_110_EC_20200824085615.pdf

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	0	0	0	0	0	0	None	None
SURFACE	Tail		0	400	343	1.62	13.8	555	100	Class C	Gel + accelerator + LCM
PRODUCTION	Lead		0	0	0	0	0	0	0	None	None
PRODUCTION	Tail		8385	20405	1331	1.89	13	2515	20	Class H	Fluid loss + retarder + LCM
INTERMEDIATE	Lead		0	8885	481	2.69	10.5	1293	20	Class C or H	Fluid loss + retarder + LCM + possibly beads for compressive strength
INTERMEDIATE	Tail		0	8885	130	1.34	14.8	174	20	Class C or H	Fluid loss + retarder + LCM

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: All necessary mud products (barite, bentonite, LCM) to control weight and fluid loss will be on site at all times. Mud program may change due to hole conditions.

Describe the mud monitoring system utilized: An electronic PVT mud system will monitor flow rate, pump pressure, stroke rate, and volume.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	400	OTHER : Fresh water spud	8.3	8.3							

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
400	8885	OTHER : Brine diesel emulsion	8.8	9.4							
8885	2040 5	OIL-BASED MUD	11	13.5							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

A 2-person mud logging program will be used from 3000 to TD. GR log will be acquired by MWD tools from the intermediate casing to TD.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No core or drill stem test is planned.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6709

Anticipated Surface Pressure: 4600

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

RS_0106_136H_H2S_Plan_20200824085807.pdf

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: RANA SALADA FED COM 0106

Well Number: 136H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

RS_0106_136H_Horizontal_Plan_20200824085828.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:

RS_0106_136H_Drill_Plan_20200824085838.pdf

CoFlex_Certs_20200824085919.pdf

RS_0106_136H_Anti_Collision_Report_20200824085928.pdf

RS_0106_136H_Speedhead_Specs_20200824085934.pdf

Other Variance attachment:

Alternative_Casing__Spec_Request_20200824090937.pdf

RS_0106_136H_Casing_Cement_Variance_20200824090957.pdf




Company: Novo Oil & Gas, LLC
 Well: Rana Salada Fed Com 0106 136H
 County: Eddy County, New Mexico (NAD 83)
 Rig: 25' KB
 Wellbore: Wellbore #1
 Design: Design #1
 Created By: MEB
 Date: 14:27, April 15 2020

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level







To convert a Magnetic Direction to a Grid Direction, Add 6.865°
 To convert a Magnetic Direction to a True Direction, Add 7.017° East
 To convert a True Direction to a Grid Direction, Subtract 0.152°

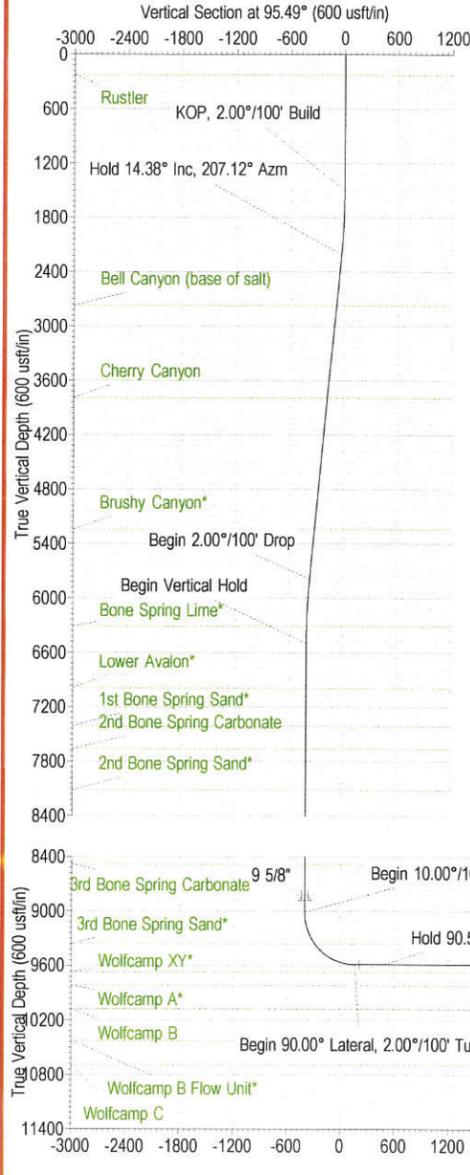

DESIGN TARGET DETAILS										SURVEY PROGRAM			
Name	FTP - Rana Salada Fed Com 0106 136H	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Depth From	Depth To	Survey/Plan	Tool	
	LTP - Rana Salada Fed Com 0106 136H	9585.00	-898.33	122.34	484840.61	629165.16	32.332578	-104.048977	0.00	20405.06	Design #1 (Wellbore #1)	MWD+HRGM	
	PBHL - Rana Salada Fed Com 0106 136H	9585.00	-999.69	10341.30	484739.25	639384.12	32.332221	-104.015893					
		9585.00	-1003.03	10431.24	484735.91	639474.06	32.332211	-104.015601					

SECTION DETAILS										WELL DETAILS: Rana Salada Fed Com 0106 136H				CASING DETAILS		
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation	+N/-S	+E/-W	GL @ 3076.90	WELL @ 3101.90usft (25' KB)	TVD	MD	Name
1500.00	0.00	0.00	1500.00	0.00	0.00	0.00	0.000	0.00	KOP, 2.00°/100' Build	0.00	0.00	485738.94	629042.82	8885.00	9015.70	9 5/8"
2218.87	14.38	207.12	2211.35	-79.86	-40.90	2.00	207.120	-33.07	Hold 14.38° Inc, 207.12° Azm							
5911.83	14.38	207.12	5788.65	-896.03	-458.92	0.00	0.000	-371.05	Begin 2.00°/100' Drop							
6630.70	0.00	0.00	6500.00	-975.89	-499.82	2.00	180.000	-404.12	Begin Vertical Hold							
9142.74	0.00	0.00	9012.04	-975.89	-499.82	0.00	0.000	-404.12	Begin 10.00°/100' Build							
10042.74	90.00	84.00	9585.00	-916.00	70.00	10.00	84.000	157.35	Begin 90.00° Lateral, 2.00°/100' Turn							
10372.03	90.00	90.59	9585.00	-900.46	398.74	2.00	90.000	483.10	Hold 90.59° Azm							
20405.06	90.00	90.59	9585.00	-1003.03	10431.24	0.00	0.000	10479.35	PBHL							

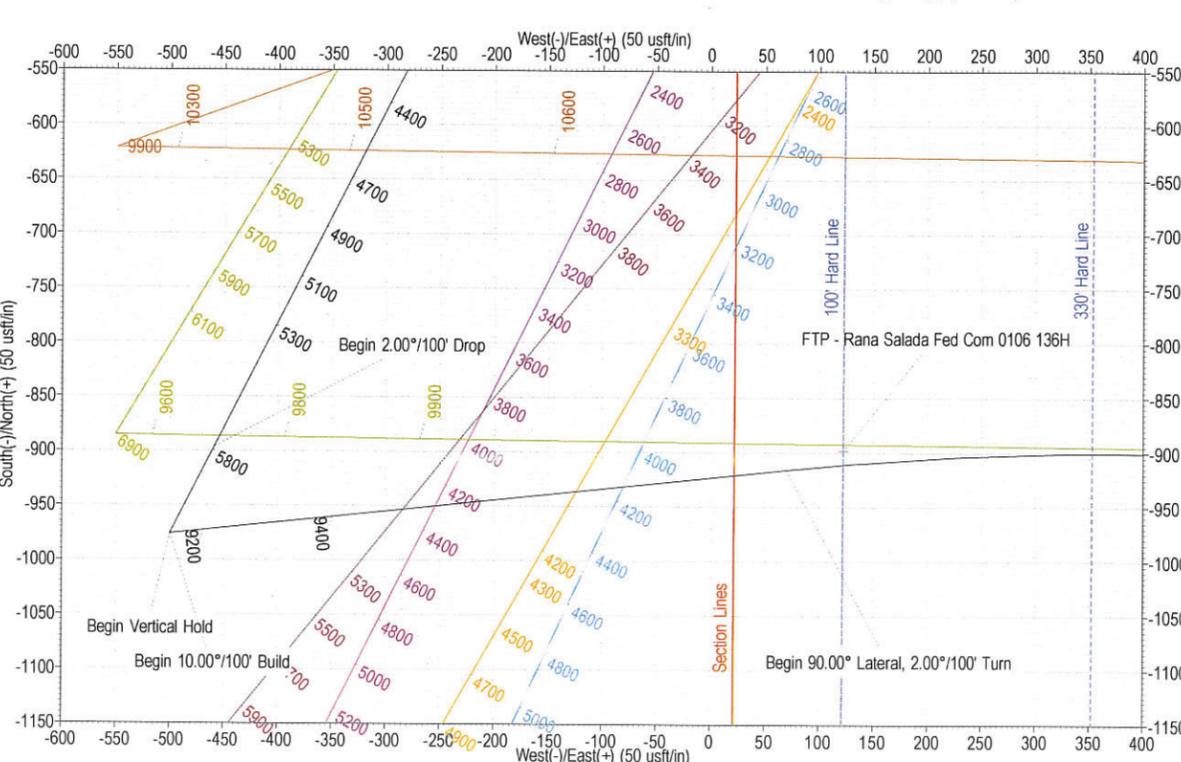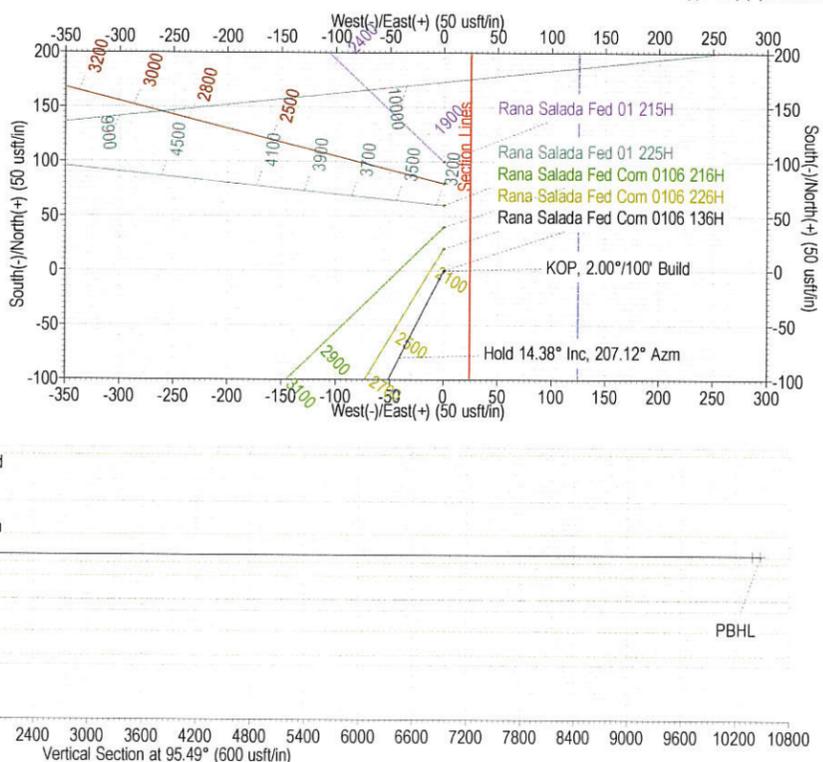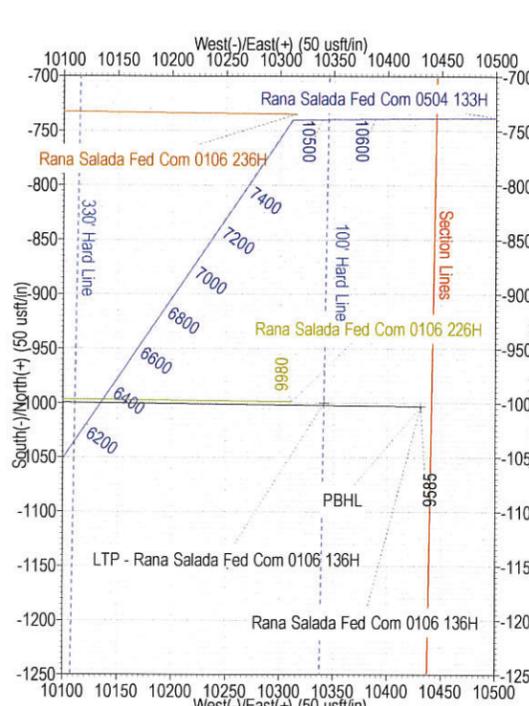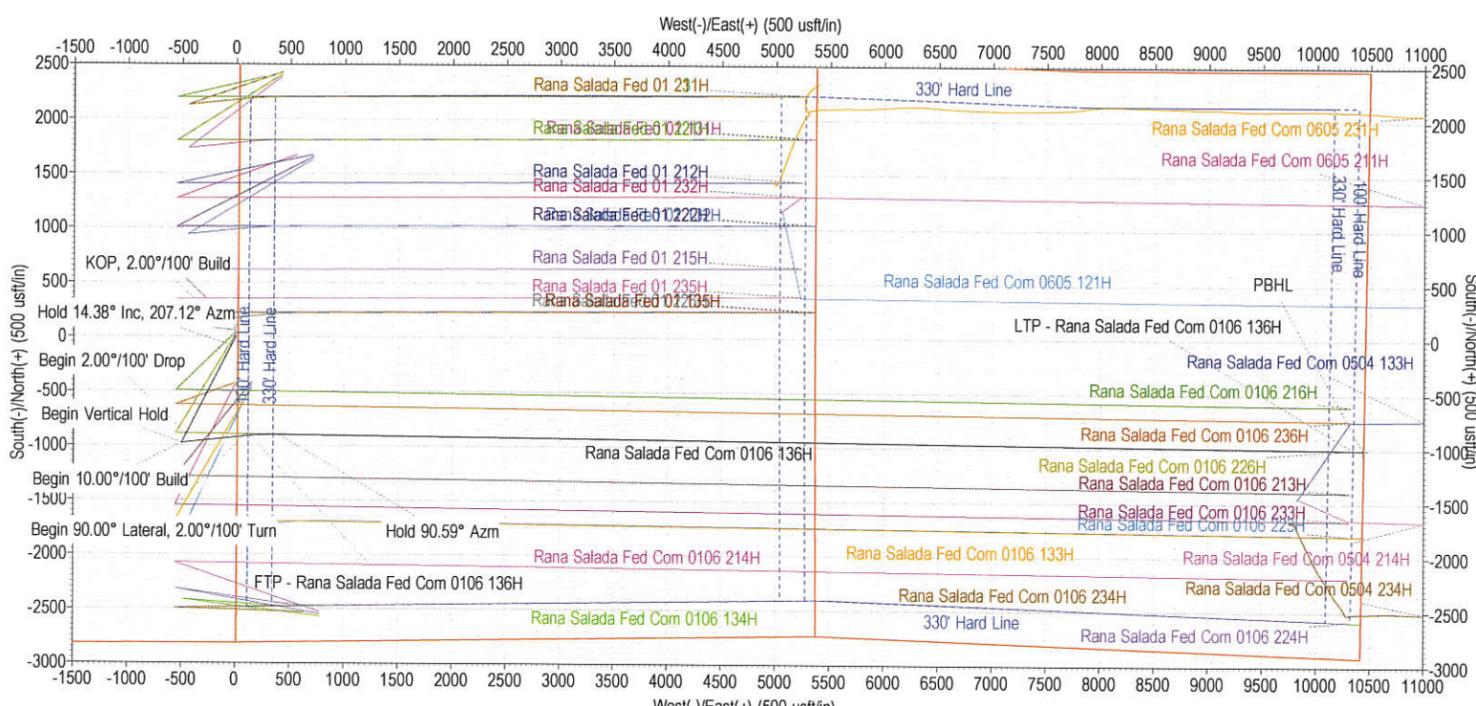



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Rana Salada Fed Com 0106 136H
Company:	Novo Oil & Gas, LLC	TVD Reference:	WELL @ 3101.90usft (25' KB)
Project:	Eddy County, New Mexico (NAD 83)	MD Reference:	WELL @ 3101.90usft (25' KB)
Site:	Rana Salada Fed 01 - K Pad	North Reference:	Grid
Well:	Rana Salada Fed Com 0106 136H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Eddy County, New Mexico (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Rana Salada Fed 01 - K Pad				
Site Position:		Northing:	485,838.92 usft	Latitude:	32.335323
From:	Map	Easting:	629,043.11 usft	Longitude:	-104.049364
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.152 °

Well	Rana Salada Fed Com 0106 136H					
Well Position	+N/-S	-99.98 usft	Northing:	485,738.94 usft	Latitude:	32.335049
	+E/-W	-0.29 usft	Easting:	629,042.82 usft	Longitude:	-104.049365
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	3,076.90 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2020	4/1/2020	7.017	60.050	47,836.30

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	95.49

Plan Survey Tool Program	Date	4/15/2020			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	20,405.06	Design #1 (Wellbore #1)	MWD+HRGM	
				OWSG MWD + HRGM	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,218.87	14.38	207.12	2,211.35	-79.86	-40.90	2.00	2.00	0.00	207.120	
5,911.83	14.38	207.12	5,788.65	-896.03	-458.92	0.00	0.00	0.00	0.000	
6,630.70	0.00	0.00	6,500.00	-975.89	-499.82	2.00	-2.00	0.00	180.000	
9,142.74	0.00	0.00	9,012.04	-975.89	-499.82	0.00	0.00	0.00	0.000	
10,042.74	90.00	84.00	9,585.00	-916.00	70.00	10.00	10.00	0.00	84.000	
10,372.03	90.00	90.59	9,585.00	-900.46	398.74	2.00	0.00	2.00	90.000	
20,405.06	90.00	90.59	9,585.00	-1,003.03	10,431.24	0.00	0.00	0.00	0.000	PBHL - Rana Salad



MS Directional
Planning Report



Database: EDM 5000.14 Conroe DB
Company: Novo Oil & Gas, LLC
Project: Eddy County, New Mexico (NAD 83)
Site: Rana Salada Fed 01 - K Pad
Well: Rana Salada Fed Com 0106 136H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Rana Salada Fed Com 0106 136H
TVD Reference: WELL @ 3101.90usft (25' KB)
MD Reference: WELL @ 3101.90usft (25' KB)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
221.90	0.00	0.00	221.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler										
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 2.00°/100' Build										
1,600.00	2.00	207.12	1,599.98	-1.55	-0.80	-0.64	2.00	2.00	2.00	0.00
1,700.00	4.00	207.12	1,699.84	-6.21	-3.18	-2.57	2.00	2.00	2.00	0.00
1,800.00	6.00	207.12	1,799.45	-13.97	-7.15	-5.78	2.00	2.00	2.00	0.00
1,900.00	8.00	207.12	1,898.70	-24.81	-12.71	-10.28	2.00	2.00	2.00	0.00
2,000.00	10.00	207.12	1,997.47	-38.74	-19.84	-16.04	2.00	2.00	2.00	0.00
2,100.00	12.00	207.12	2,095.62	-55.72	-28.54	-23.07	2.00	2.00	2.00	0.00
2,200.00	14.00	207.12	2,193.06	-75.74	-38.79	-31.36	2.00	2.00	2.00	0.00
2,218.87	14.38	207.12	2,211.35	-79.86	-40.90	-33.07	2.00	2.00	2.00	0.00
Hold 14.38° Inc, 207.12° Azm										
2,300.00	14.38	207.12	2,289.94	-97.79	-50.08	-40.49	0.00	0.00	0.00	0.00
2,400.00	14.38	207.12	2,386.81	-119.89	-61.40	-49.65	0.00	0.00	0.00	0.00
2,500.00	14.38	207.12	2,483.67	-141.99	-72.72	-58.80	0.00	0.00	0.00	0.00
2,600.00	14.38	207.12	2,580.54	-164.09	-84.04	-67.95	0.00	0.00	0.00	0.00
2,700.00	14.38	207.12	2,677.41	-186.19	-95.36	-77.10	0.00	0.00	0.00	0.00
2,797.54	14.38	207.12	2,771.90	-207.75	-106.40	-86.03	0.00	0.00	0.00	0.00
Bell Canyon (base of salt)										
2,800.00	14.38	207.12	2,774.28	-208.29	-106.68	-86.25	0.00	0.00	0.00	0.00
2,900.00	14.38	207.12	2,871.15	-230.39	-118.00	-95.41	0.00	0.00	0.00	0.00
3,000.00	14.38	207.12	2,968.02	-252.49	-129.32	-104.56	0.00	0.00	0.00	0.00
3,100.00	14.38	207.12	3,064.88	-274.59	-140.64	-113.71	0.00	0.00	0.00	0.00
3,200.00	14.38	207.12	3,161.75	-296.70	-151.96	-122.86	0.00	0.00	0.00	0.00
3,300.00	14.38	207.12	3,258.62	-318.80	-163.28	-132.01	0.00	0.00	0.00	0.00
3,400.00	14.38	207.12	3,355.49	-340.90	-174.60	-141.17	0.00	0.00	0.00	0.00
3,500.00	14.38	207.12	3,452.36	-363.00	-185.92	-150.32	0.00	0.00	0.00	0.00
3,600.00	14.38	207.12	3,549.22	-385.10	-197.23	-159.47	0.00	0.00	0.00	0.00
3,700.00	14.38	207.12	3,646.09	-407.20	-208.55	-168.62	0.00	0.00	0.00	0.00
3,800.00	14.38	207.12	3,742.96	-429.30	-219.87	-177.77	0.00	0.00	0.00	0.00
3,850.52	14.38	207.12	3,791.90	-440.47	-225.59	-182.40	0.00	0.00	0.00	0.00
Cherry Canyon										
3,900.00	14.38	207.12	3,839.83	-451.40	-231.19	-186.93	0.00	0.00	0.00	0.00
4,000.00	14.38	207.12	3,936.70	-473.50	-242.51	-196.08	0.00	0.00	0.00	0.00
4,100.00	14.38	207.12	4,033.56	-495.60	-253.83	-205.23	0.00	0.00	0.00	0.00
4,200.00	14.38	207.12	4,130.43	-517.70	-265.15	-214.38	0.00	0.00	0.00	0.00
4,300.00	14.38	207.12	4,227.30	-539.80	-276.47	-223.53	0.00	0.00	0.00	0.00



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Rana Salada Fed Com 0106 136H
Company:	Novo Oil & Gas, LLC	TVD Reference:	WELL @ 3101.90usft (25' KB)
Project:	Eddy County, New Mexico (NAD 83)	MD Reference:	WELL @ 3101.90usft (25' KB)
Site:	Rana Salada Fed 01 - K Pad	North Reference:	Grid
Well:	Rana Salada Fed Com 0106 136H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,400.00	14.38	207.12	4,324.17	-561.91	-287.79	-232.69	0.00	0.00	0.00	
4,500.00	14.38	207.12	4,421.04	-584.01	-299.11	-241.84	0.00	0.00	0.00	
4,600.00	14.38	207.12	4,517.90	-606.11	-310.43	-250.99	0.00	0.00	0.00	
4,700.00	14.38	207.12	4,614.77	-628.21	-321.75	-260.14	0.00	0.00	0.00	
4,800.00	14.38	207.12	4,711.64	-650.31	-333.07	-269.29	0.00	0.00	0.00	
4,900.00	14.38	207.12	4,808.51	-672.41	-344.39	-278.45	0.00	0.00	0.00	
5,000.00	14.38	207.12	4,905.38	-694.51	-355.71	-287.60	0.00	0.00	0.00	
5,100.00	14.38	207.12	5,002.24	-716.61	-367.02	-296.75	0.00	0.00	0.00	
5,200.00	14.38	207.12	5,099.11	-738.71	-378.34	-305.90	0.00	0.00	0.00	
5,300.00	14.38	207.12	5,195.98	-760.81	-389.66	-315.05	0.00	0.00	0.00	
5,347.40	14.38	207.12	5,241.90	-771.29	-395.03	-319.39	0.00	0.00	0.00	
Brushy Canyon*										
5,400.00	14.38	207.12	5,292.85	-782.91	-400.98	-324.21	0.00	0.00	0.00	
5,500.00	14.38	207.12	5,389.72	-805.01	-412.30	-333.36	0.00	0.00	0.00	
5,600.00	14.38	207.12	5,486.59	-827.12	-423.62	-342.51	0.00	0.00	0.00	
5,700.00	14.38	207.12	5,583.45	-849.22	-434.94	-351.66	0.00	0.00	0.00	
5,800.00	14.38	207.12	5,680.32	-871.32	-446.26	-360.81	0.00	0.00	0.00	
5,900.00	14.38	207.12	5,777.19	-893.42	-457.58	-369.97	0.00	0.00	0.00	
5,911.83	14.38	207.12	5,788.65	-896.03	-458.92	-371.05	0.00	0.00	0.00	
Begin 2.00°/100' Drop										
6,000.00	12.61	207.12	5,874.38	-914.35	-468.30	-378.63	2.00	-2.00	0.00	
6,100.00	10.61	207.12	5,972.33	-932.26	-477.47	-386.05	2.00	-2.00	0.00	
6,200.00	8.61	207.12	6,070.92	-947.13	-485.09	-392.21	2.00	-2.00	0.00	
6,300.00	6.61	207.12	6,170.03	-958.92	-491.13	-397.09	2.00	-2.00	0.00	
6,400.00	4.61	207.12	6,269.55	-967.63	-495.59	-400.70	2.00	-2.00	0.00	
6,442.47	3.76	207.12	6,311.90	-970.39	-497.00	-401.84	2.00	-2.00	0.00	
Bone Spring Lime*										
6,500.00	2.61	207.12	6,369.34	-973.24	-498.46	-403.02	2.00	-2.00	0.00	
6,600.00	0.61	207.12	6,469.30	-975.74	-499.74	-404.06	2.00	-2.00	0.00	
6,630.70	0.00	0.00	6,500.00	-975.89	-499.82	-404.12	2.00	-2.00	0.00	
Begin Vertical Hold										
6,700.00	0.00	0.00	6,569.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
6,800.00	0.00	0.00	6,669.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
6,900.00	0.00	0.00	6,769.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,000.00	0.00	0.00	6,869.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,100.00	0.00	0.00	6,969.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,122.60	0.00	0.00	6,991.90	-975.89	-499.82	-404.12	0.00	0.00	0.00	
Lower Avalon*										
7,200.00	0.00	0.00	7,069.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,300.00	0.00	0.00	7,169.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,400.00	0.00	0.00	7,269.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,500.00	0.00	0.00	7,369.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,542.60	0.00	0.00	7,411.90	-975.89	-499.82	-404.12	0.00	0.00	0.00	
1st Bone Spring Sand*										
7,600.00	0.00	0.00	7,469.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,700.00	0.00	0.00	7,569.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,792.60	0.00	0.00	7,661.90	-975.89	-499.82	-404.12	0.00	0.00	0.00	
2nd Bone Spring Carbonate										
7,800.00	0.00	0.00	7,669.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
7,900.00	0.00	0.00	7,769.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
8,000.00	0.00	0.00	7,869.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
8,100.00	0.00	0.00	7,969.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	
8,200.00	0.00	0.00	8,069.30	-975.89	-499.82	-404.12	0.00	0.00	0.00	



MS Directional
Planning Report



Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Rana Salada Fed Com 0106 136H
Company:	Novo Oil & Gas, LLC	TVD Reference:	WELL @ 3101.90usft (25' KB)
Project:	Eddy County, New Mexico (NAD 83)	MD Reference:	WELL @ 3101.90usft (25' KB)
Site:	Rana Salada Fed 01 - K Pad	North Reference:	Grid
Well:	Rana Salada Fed Com 0106 136H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,247.60	0.00	0.00	8,116.90	-975.89	-499.82	-404.12	0.00	0.00	0.00
2nd Bone Spring Sand*									
8,300.00	0.00	0.00	8,169.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,400.00	0.00	0.00	8,269.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,500.00	0.00	0.00	8,369.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,600.00	0.00	0.00	8,469.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,612.60	0.00	0.00	8,481.90	-975.89	-499.82	-404.12	0.00	0.00	0.00
3rd Bone Spring Carbonate									
8,700.00	0.00	0.00	8,569.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,800.00	0.00	0.00	8,669.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
8,900.00	0.00	0.00	8,769.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
9,000.00	0.00	0.00	8,869.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
9,015.70	0.00	0.00	8,885.00	-975.89	-499.82	-404.12	0.00	0.00	0.00
9 5/8"									
9,100.00	0.00	0.00	8,969.30	-975.89	-499.82	-404.12	0.00	0.00	0.00
9,142.74	0.00	0.00	9,012.04	-975.89	-499.82	-404.12	0.00	0.00	0.00
Begin 10.00°/100' Build									
9,150.00	0.73	84.00	9,019.30	-975.89	-499.77	-404.07	10.00	10.00	0.00
9,200.00	5.73	84.00	9,069.20	-975.59	-496.98	-401.32	10.00	10.00	0.00
9,250.00	10.73	84.00	9,118.67	-974.84	-489.86	-394.31	10.00	10.00	0.00
9,300.00	15.73	84.00	9,167.33	-973.65	-478.49	-383.10	10.00	10.00	0.00
9,350.00	20.73	84.00	9,214.81	-972.01	-462.94	-367.78	10.00	10.00	0.00
9,400.00	25.73	84.00	9,260.74	-969.95	-443.34	-348.47	10.00	10.00	0.00
9,450.00	30.73	84.00	9,304.78	-967.48	-419.83	-325.30	10.00	10.00	0.00
9,500.00	35.73	84.00	9,346.59	-964.62	-392.59	-298.46	10.00	10.00	0.00
9,519.09	37.63	84.00	9,361.90	-963.43	-381.25	-287.29	10.00	10.00	0.00
3rd Bone Spring Sand*									
9,550.00	40.73	84.00	9,385.86	-961.39	-361.83	-268.15	10.00	10.00	0.00
9,600.00	45.73	84.00	9,422.28	-957.81	-327.79	-234.61	10.00	10.00	0.00
9,650.00	50.73	84.00	9,455.58	-953.91	-290.72	-198.08	10.00	10.00	0.00
9,700.00	55.73	84.00	9,485.51	-949.73	-250.90	-158.84	10.00	10.00	0.00
9,750.00	60.73	84.00	9,511.83	-945.29	-208.64	-117.20	10.00	10.00	0.00
9,800.00	65.73	84.00	9,534.34	-940.62	-164.26	-73.47	10.00	10.00	0.00
9,850.00	70.73	84.00	9,552.89	-935.77	-118.09	-27.98	10.00	10.00	0.00
9,900.00	75.73	84.00	9,567.31	-930.77	-70.50	18.91	10.00	10.00	0.00
9,950.00	80.73	84.00	9,577.51	-925.65	-21.83	66.87	10.00	10.00	0.00
10,000.00	85.73	84.00	9,583.41	-920.46	27.53	115.51	10.00	10.00	0.00
10,042.74	90.00	84.00	9,585.00	-916.00	70.00	157.35	10.00	10.00	0.00
Begin 90.00° Lateral, 2.00°/100' Turn									
10,100.00	90.00	85.15	9,585.00	-910.58	127.00	213.57	2.00	0.00	2.00
10,200.00	90.00	87.15	9,585.00	-903.86	226.77	312.24	2.00	0.00	2.00
10,300.00	90.00	89.15	9,585.00	-900.63	326.71	411.41	2.00	0.00	2.00
10,372.03	90.00	90.59	9,585.00	-900.46	398.74	483.10	2.00	0.00	2.00
Hold 90.59° Azm									
10,400.00	90.00	90.59	9,585.00	-900.74	426.71	510.96	0.00	0.00	0.00
10,500.00	90.00	90.59	9,585.00	-901.76	526.70	610.60	0.00	0.00	0.00
10,600.00	90.00	90.59	9,585.00	-902.79	626.70	710.23	0.00	0.00	0.00
10,700.00	90.00	90.59	9,585.00	-903.81	726.69	809.86	0.00	0.00	0.00
10,800.00	90.00	90.59	9,585.00	-904.83	826.69	909.50	0.00	0.00	0.00
10,900.00	90.00	90.59	9,585.00	-905.85	926.68	1,009.13	0.00	0.00	0.00
11,000.00	90.00	90.59	9,585.00	-906.88	1,026.67	1,108.76	0.00	0.00	0.00
11,100.00	90.00	90.59	9,585.00	-907.90	1,126.67	1,208.40	0.00	0.00	0.00
11,200.00	90.00	90.59	9,585.00	-908.92	1,226.66	1,308.03	0.00	0.00	0.00



MS Directional
Planning Report



Database: EDM 5000.14 Conroe DB
Company: Novo Oil & Gas, LLC
Project: Eddy County, New Mexico (NAD 83)
Site: Rana Salada Fed 01 - K Pad
Well: Rana Salada Fed Com 0106 136H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Rana Salada Fed Com 0106 136H
TVD Reference: WELL @ 3101.90usft (25' KB)
MD Reference: WELL @ 3101.90usft (25' KB)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,300.00	90.00	90.59	9,585.00	-909.94	1,326.66	1,407.66	0.00	0.00	0.00
11,400.00	90.00	90.59	9,585.00	-910.97	1,426.65	1,507.30	0.00	0.00	0.00
11,500.00	90.00	90.59	9,585.00	-911.99	1,526.65	1,606.93	0.00	0.00	0.00
11,600.00	90.00	90.59	9,585.00	-913.01	1,626.64	1,706.56	0.00	0.00	0.00
11,700.00	90.00	90.59	9,585.00	-914.03	1,726.64	1,806.20	0.00	0.00	0.00
11,800.00	90.00	90.59	9,585.00	-915.06	1,826.63	1,905.83	0.00	0.00	0.00
11,900.00	90.00	90.59	9,585.00	-916.08	1,926.63	2,005.46	0.00	0.00	0.00
12,000.00	90.00	90.59	9,585.00	-917.10	2,026.62	2,105.10	0.00	0.00	0.00
12,100.00	90.00	90.59	9,585.00	-918.12	2,126.62	2,204.73	0.00	0.00	0.00
12,200.00	90.00	90.59	9,585.00	-919.14	2,226.61	2,304.37	0.00	0.00	0.00
12,300.00	90.00	90.59	9,585.00	-920.17	2,326.61	2,404.00	0.00	0.00	0.00
12,400.00	90.00	90.59	9,585.00	-921.19	2,426.60	2,503.63	0.00	0.00	0.00
12,500.00	90.00	90.59	9,585.00	-922.21	2,526.60	2,603.27	0.00	0.00	0.00
12,600.00	90.00	90.59	9,585.00	-923.23	2,626.59	2,702.90	0.00	0.00	0.00
12,700.00	90.00	90.59	9,585.00	-924.26	2,726.59	2,802.53	0.00	0.00	0.00
12,800.00	90.00	90.59	9,585.00	-925.28	2,826.58	2,902.17	0.00	0.00	0.00
12,900.00	90.00	90.59	9,585.00	-926.30	2,926.58	3,001.80	0.00	0.00	0.00
13,000.00	90.00	90.59	9,585.00	-927.32	3,026.57	3,101.43	0.00	0.00	0.00
13,100.00	90.00	90.59	9,585.00	-928.35	3,126.57	3,201.07	0.00	0.00	0.00
13,200.00	90.00	90.59	9,585.00	-929.37	3,226.56	3,300.70	0.00	0.00	0.00
13,300.00	90.00	90.59	9,585.00	-930.39	3,326.55	3,400.33	0.00	0.00	0.00
13,400.00	90.00	90.59	9,585.00	-931.41	3,426.55	3,499.97	0.00	0.00	0.00
13,500.00	90.00	90.59	9,585.00	-932.44	3,526.54	3,599.60	0.00	0.00	0.00
13,600.00	90.00	90.59	9,585.00	-933.46	3,626.54	3,699.23	0.00	0.00	0.00
13,700.00	90.00	90.59	9,585.00	-934.48	3,726.53	3,798.87	0.00	0.00	0.00
13,800.00	90.00	90.59	9,585.00	-935.50	3,826.53	3,898.50	0.00	0.00	0.00
13,900.00	90.00	90.59	9,585.00	-936.52	3,926.52	3,998.14	0.00	0.00	0.00
14,000.00	90.00	90.59	9,585.00	-937.55	4,026.52	4,097.77	0.00	0.00	0.00
14,100.00	90.00	90.59	9,585.00	-938.57	4,126.51	4,197.40	0.00	0.00	0.00
14,200.00	90.00	90.59	9,585.00	-939.59	4,226.51	4,297.04	0.00	0.00	0.00
14,300.00	90.00	90.59	9,585.00	-940.61	4,326.50	4,396.67	0.00	0.00	0.00
14,400.00	90.00	90.59	9,585.00	-941.64	4,426.50	4,496.30	0.00	0.00	0.00
14,500.00	90.00	90.59	9,585.00	-942.66	4,526.49	4,595.94	0.00	0.00	0.00
14,600.00	90.00	90.59	9,585.00	-943.68	4,626.49	4,695.57	0.00	0.00	0.00
14,700.00	90.00	90.59	9,585.00	-944.70	4,726.48	4,795.20	0.00	0.00	0.00
14,800.00	90.00	90.59	9,585.00	-945.73	4,826.48	4,894.84	0.00	0.00	0.00
14,900.00	90.00	90.59	9,585.00	-946.75	4,926.47	4,994.47	0.00	0.00	0.00
15,000.00	90.00	90.59	9,585.00	-947.77	5,026.47	5,094.10	0.00	0.00	0.00
15,100.00	90.00	90.59	9,585.00	-948.79	5,126.46	5,193.74	0.00	0.00	0.00
15,200.00	90.00	90.59	9,585.00	-949.82	5,226.46	5,293.37	0.00	0.00	0.00
15,300.00	90.00	90.59	9,585.00	-950.84	5,326.45	5,393.00	0.00	0.00	0.00
15,400.00	90.00	90.59	9,585.00	-951.86	5,426.44	5,492.64	0.00	0.00	0.00
15,500.00	90.00	90.59	9,585.00	-952.88	5,526.44	5,592.27	0.00	0.00	0.00
15,600.00	90.00	90.59	9,585.00	-953.90	5,626.43	5,691.91	0.00	0.00	0.00
15,700.00	90.00	90.59	9,585.00	-954.93	5,726.43	5,791.54	0.00	0.00	0.00
15,800.00	90.00	90.59	9,585.00	-955.95	5,826.42	5,891.17	0.00	0.00	0.00
15,900.00	90.00	90.59	9,585.00	-956.97	5,926.42	5,990.81	0.00	0.00	0.00
16,000.00	90.00	90.59	9,585.00	-957.99	6,026.41	6,090.44	0.00	0.00	0.00
16,100.00	90.00	90.59	9,585.00	-959.02	6,126.41	6,190.07	0.00	0.00	0.00
16,200.00	90.00	90.59	9,585.00	-960.04	6,226.40	6,289.71	0.00	0.00	0.00
16,300.00	90.00	90.59	9,585.00	-961.06	6,326.40	6,389.34	0.00	0.00	0.00
16,400.00	90.00	90.59	9,585.00	-962.08	6,426.39	6,488.97	0.00	0.00	0.00
16,500.00	90.00	90.59	9,585.00	-963.11	6,526.39	6,588.61	0.00	0.00	0.00
16,600.00	90.00	90.59	9,585.00	-964.13	6,626.38	6,688.24	0.00	0.00	0.00



MS Directional
Planning Report



Database: EDM 5000.14 Conroe DB
Company: Novo Oil & Gas, LLC
Project: Eddy County, New Mexico (NAD 83)
Site: Rana Salada Fed 01 - K Pad
Well: Rana Salada Fed Com 0106 136H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well Rana Salada Fed Com 0106 136H
TVD Reference: WELL @ 3101.90usft (25' KB)
MD Reference: WELL @ 3101.90usft (25' KB)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,700.00	90.00	90.59	9,585.00	-965.15	6,726.38	6,787.87	0.00	0.00	0.00
16,800.00	90.00	90.59	9,585.00	-966.17	6,826.37	6,887.51	0.00	0.00	0.00
16,900.00	90.00	90.59	9,585.00	-967.20	6,926.37	6,987.14	0.00	0.00	0.00
17,000.00	90.00	90.59	9,585.00	-968.22	7,026.36	7,086.77	0.00	0.00	0.00
17,100.00	90.00	90.59	9,585.00	-969.24	7,126.36	7,186.41	0.00	0.00	0.00
17,200.00	90.00	90.59	9,585.00	-970.26	7,226.35	7,286.04	0.00	0.00	0.00
17,300.00	90.00	90.59	9,585.00	-971.29	7,326.35	7,385.68	0.00	0.00	0.00
17,400.00	90.00	90.59	9,585.00	-972.31	7,426.34	7,485.31	0.00	0.00	0.00
17,500.00	90.00	90.59	9,585.00	-973.33	7,526.34	7,584.94	0.00	0.00	0.00
17,600.00	90.00	90.59	9,585.00	-974.35	7,626.33	7,684.58	0.00	0.00	0.00
17,700.00	90.00	90.59	9,585.00	-975.37	7,726.32	7,784.21	0.00	0.00	0.00
17,800.00	90.00	90.59	9,585.00	-976.40	7,826.32	7,883.84	0.00	0.00	0.00
17,900.00	90.00	90.59	9,585.00	-977.42	7,926.31	7,983.48	0.00	0.00	0.00
18,000.00	90.00	90.59	9,585.00	-978.44	8,026.31	8,083.11	0.00	0.00	0.00
18,100.00	90.00	90.59	9,585.00	-979.46	8,126.30	8,182.74	0.00	0.00	0.00
18,200.00	90.00	90.59	9,585.00	-980.49	8,226.30	8,282.38	0.00	0.00	0.00
18,300.00	90.00	90.59	9,585.00	-981.51	8,326.29	8,382.01	0.00	0.00	0.00
18,400.00	90.00	90.59	9,585.00	-982.53	8,426.29	8,481.64	0.00	0.00	0.00
18,500.00	90.00	90.59	9,585.00	-983.55	8,526.28	8,581.28	0.00	0.00	0.00
18,600.00	90.00	90.59	9,585.00	-984.58	8,626.28	8,680.91	0.00	0.00	0.00
18,700.00	90.00	90.59	9,585.00	-985.60	8,726.27	8,780.54	0.00	0.00	0.00
18,800.00	90.00	90.59	9,585.00	-986.62	8,826.27	8,880.18	0.00	0.00	0.00
18,900.00	90.00	90.59	9,585.00	-987.64	8,926.26	8,979.81	0.00	0.00	0.00
19,000.00	90.00	90.59	9,585.00	-988.67	9,026.26	9,079.45	0.00	0.00	0.00
19,100.00	90.00	90.59	9,585.00	-989.69	9,126.25	9,179.08	0.00	0.00	0.00
19,200.00	90.00	90.59	9,585.00	-990.71	9,226.25	9,278.71	0.00	0.00	0.00
19,300.00	90.00	90.59	9,585.00	-991.73	9,326.24	9,378.35	0.00	0.00	0.00
19,400.00	90.00	90.59	9,585.00	-992.75	9,426.24	9,477.98	0.00	0.00	0.00
19,500.00	90.00	90.59	9,585.00	-993.78	9,526.23	9,577.61	0.00	0.00	0.00
19,600.00	90.00	90.59	9,585.00	-994.80	9,626.23	9,677.25	0.00	0.00	0.00
19,700.00	90.00	90.59	9,585.00	-995.82	9,726.22	9,776.88	0.00	0.00	0.00
19,800.00	90.00	90.59	9,585.00	-996.84	9,826.22	9,876.51	0.00	0.00	0.00
19,900.00	90.00	90.59	9,585.00	-997.87	9,926.21	9,976.15	0.00	0.00	0.00
20,000.00	90.00	90.59	9,585.00	-998.89	10,026.20	10,075.78	0.00	0.00	0.00
20,100.00	90.00	90.59	9,585.00	-999.91	10,126.20	10,175.41	0.00	0.00	0.00
20,200.00	90.00	90.59	9,585.00	-1,000.93	10,226.19	10,275.05	0.00	0.00	0.00
20,300.00	90.00	90.59	9,585.00	-1,001.96	10,326.19	10,374.68	0.00	0.00	0.00
20,405.06	90.00	90.59	9,585.00	-1,003.03	10,431.24	10,479.35	0.00	0.00	0.00
PBHL									



MS Directional
Planning Report




Database:	EDM 5000.14 Conroe DB	Local Co-ordinate Reference:	Well Rana Salada Fed Com 0106 136H
Company:	Novo Oil & Gas, LLC	TVD Reference:	WELL @ 3101.90usft (25' KB)
Project:	Eddy County, New Mexico (NAD 83)	MD Reference:	WELL @ 3101.90usft (25' KB)
Site:	Rana Salada Fed 01 - K Pad	North Reference:	Grid
Well:	Rana Salada Fed Com 0106 136H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
LTP - Rana Salada Fe - plan misses target center by 15.28usft at 20300.00usft MD (9585.00 TVD, -1001.96 N, 10326.19 E) - Point	0.00	0.00	9,585.00	-999.69	10,341.30	484,739.25	639,384.12	32.332221	-104.015893
PBHL - Rana Salada l - plan hits target center - Point	0.00	0.00	9,585.00	-1,003.03	10,431.24	484,735.91	639,474.06	32.332211	-104.015602
FTP - Rana Salada Fe - plan misses target center by 12.60usft at 10096.52usft MD (9585.00 TVD, -910.88 N, 123.53 E) - Point	0.00	0.00	9,585.00	-898.33	122.34	484,840.61	629,165.16	32.332578	-104.048977

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
9,015.70	8,885.00	9 5/8"	9-5/8	12-1/4

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
221.90	221.90	Rustler				
2,797.54	2,771.90	Bell Canyon (base of salt)				
3,850.52	3,791.90	Cherry Canyon				
5,347.40	5,241.90	Brushy Canyon*				
6,442.47	6,311.90	Bone Spring Lime*				
7,122.60	6,991.90	Lower Avalon*				
7,542.60	7,411.90	1st Bone Spring Sand*				
7,792.60	7,661.90	2nd Bone Spring Carbonate				
8,247.60	8,116.90	2nd Bone Spring Sand*				
8,612.60	8,481.90	3rd Bone Spring Carbonate				
9,519.09	9,361.90	3rd Bone Spring Sand*				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment	
1,500.00	1,500.00	0.00	0.00	KOP, 2.00°/100' Build	
2,218.87	2,211.35	-79.86	-40.90	Hold 14.38° Inc, 207.12° Azm	
5,911.83	5,788.65	-896.03	-458.92	Begin 2.00°/100' Drop	
6,630.70	6,500.00	-975.89	-499.82	Begin Vertical Hold	
9,142.74	9,012.04	-975.89	-499.82	Begin 10.00°/100' Build	
10,042.74	9,585.00	-916.00	70.00	Begin 90.00° Lateral, 2.00°/100' Turn	
10,372.03	9,585.00	-900.46	398.74	Hold 90.59° Azm	
20,405.06	9,585.00	-1,003.03	10,431.24	PBHL	

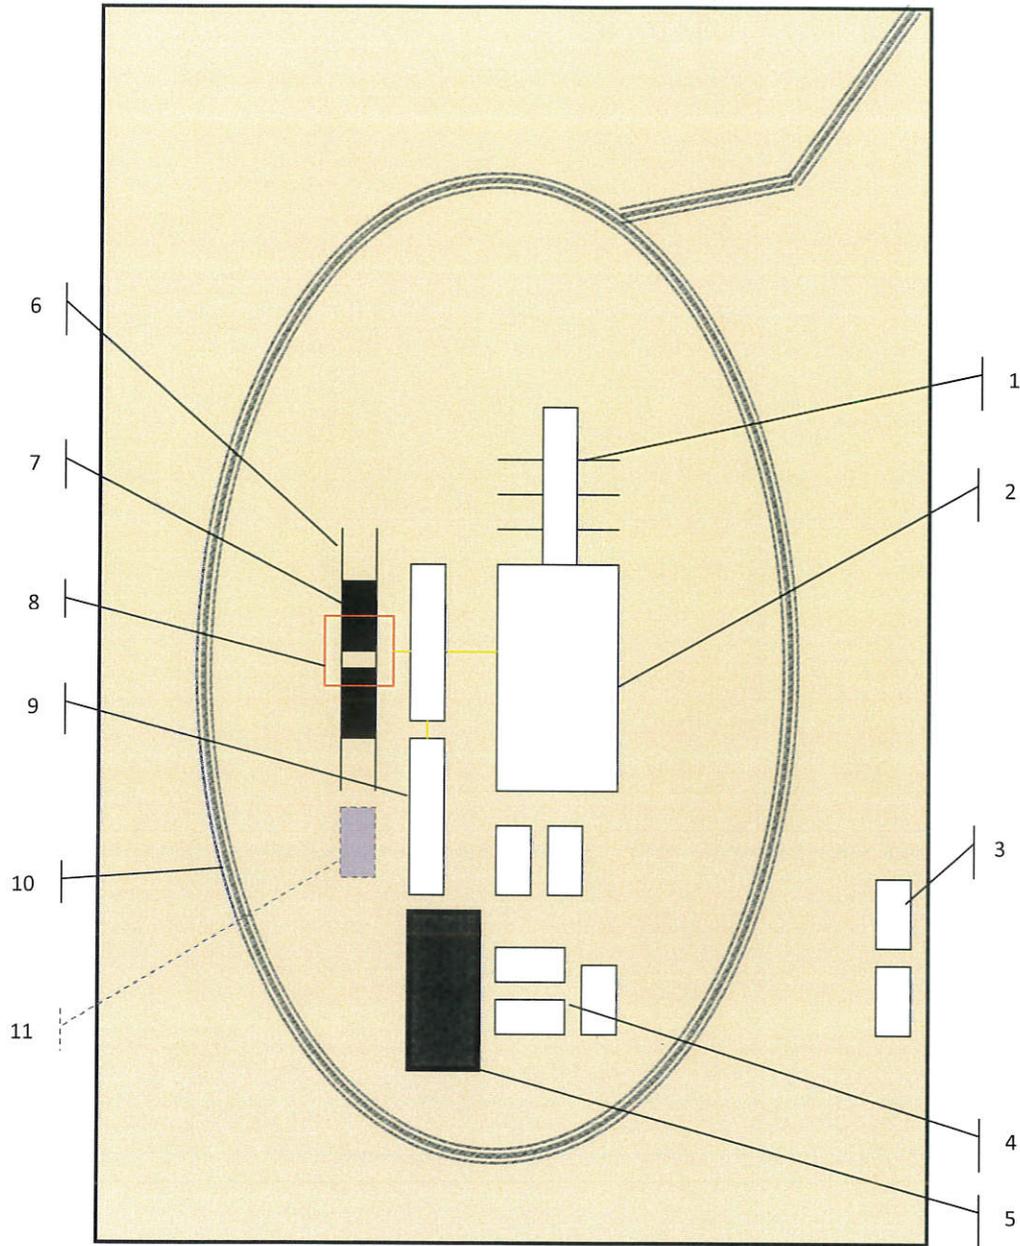

Schematic Closed Loop Drilling Rig*

1. Pipe Rack
2. Drill Rig
3. House Trailers/ Offices
4. Generator/Fuel/Storage
5. Overflow-Frac Tank
6. Skids
7. Roll Offs
8. Hopper or Centrifuge
9. Mud Tanks
10. Loop Drive
11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available




Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)
Hopper in air to settle out solids (2)
Water return pipe (3)
Shaker between hopper and mud tanks (4)
Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

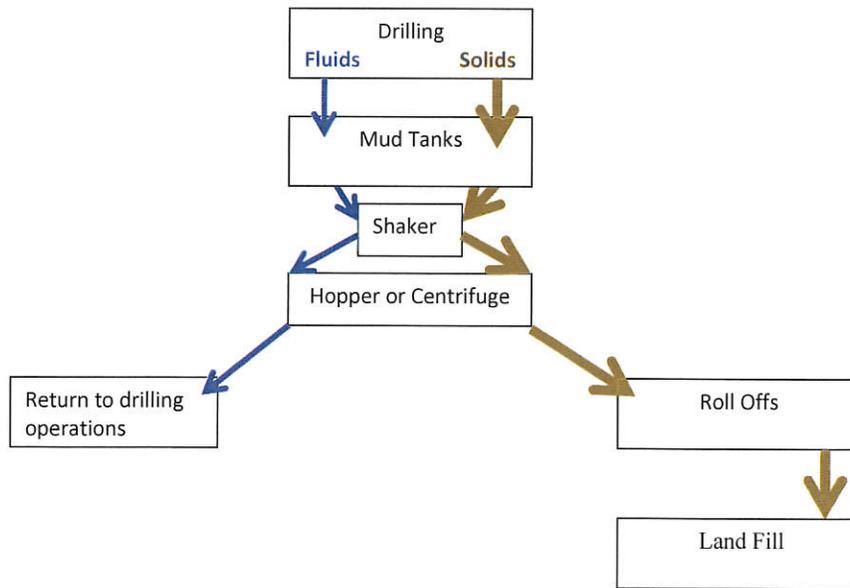

Photos Courtesy of Gandy Corporation Oil Field Service

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 24902

COMMENTS

Operator: NOVO OIL & GAS NORTHERN DELAWA Suite 206 Oklahoma City, OK73116	1001 West Wilshire Blvd	OGRID: 372920	Action Number: 24902	Action Type: FORM 3160-3
--	-------------------------	------------------	-------------------------	-----------------------------

Created By	Comment	Comment Date
kpickford	KP GEO Review 4/22/2021	04/22/2021

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720
District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 24902

CONDITIONS OF APPROVAL

Operator:	NOVO OIL & GAS NORTHERN DELAWA Suite 206 Oklahoma City, OK73116	1001 West Wilshire Blvd	OGRID: 372920	Action Number: 24902	Action Type: FORM 3160-3
-----------	--	-------------------------	------------------	-------------------------	-----------------------------

OCD Reviewer	Condition
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system