

Well Name: WEST BISTI COAL 25	Well Location: T25N / R13W / SEC 25 / NWNE / 36.376129 / 108.167267	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM61273	Unit or CA Name:	Unit or CA Number:
US Well Number: 3004528559	Well Status: Gas Well Shut In	Operator: DJR OPERATING LLC

Notice of Intent

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 01/27/2021

Time Sundry Submitted: 09:28

Date proposed operation will begin: 01/27/2021

Procedure Description: DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram and Reclamation Plan.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Reclamation_Plan_West_Bisti_Coal_25_1_20210127092745.pdf

Proposed_WBD_West_Bisti_Coal__25_1_20210127092735.pdf

Current_WBD_West_Bisti_Coal__25_1_20210127092725.pdf

PA_Procedure_West_Bisti_Coal_25_1_20210127092717.pdf

Well Name: WEST BISTI COAL 25

Well Location: T25N / R13W / SEC 25 / NWNE / 36.376129 / 108.167267

County or Parish/State: SAN JUAN / NM

Well Number: 1

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMNM61273

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004528559

Well Status: Gas Well Shut In

Operator: DJR OPERATING LLC

Conditions of Approval

Specialist Review

General_Requirement_P_A_20210316105926.pdf

Additional Reviews

25N13W25BKpc_West_Bisti_Coal_25_1_20210421170729.pdf

Authorized Officer

PA_COA_notifications_20210422075831.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 27, 2021 09:27 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 Road 3263

City: Aztec **State:** NM

Phone: (505) 632-3476

Email address: sford@djrlc.com

Field Representative

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JOE D KILLINS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647731

BLM POC Email Address: jkillins@blm.gov

Disposition: Approved

Disposition Date: 04/22/2021

Signature: Joe Killins

Plug and Abandonment Procedure
for
DJR Operating, LLC
West Bisti Coal 25 1
API # 30-045-28559
NW/NE, Unit B, Sec. 25, T25N, R13W
San Juan County, NM

I.

1. Hold pre-job meeting, comply with all NMOCD, BLM and environmental regulations.
2. Check and record tubing, casing and bradenhead pressures.
3. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
4. Trip out of hole with rods and pump. Lay down to be sent in for storage/salvage.
5. ND WH, NU BOP, function test BOP.
6. Trip out of hole with 2 3/8" tubing. LD tubing to be sent in for storage/salvage.

II.

7. PU workstring, TIH with bit and scraper, make sure that the bit and scraper will go below 1130'. TOOH.
8. PU and RIH with a 4 1/2" cement retainer. Set the CR at +/- 1130'. Pressure test tubing to 1000 psi, sting out of CR, test casing to 600 psi. If casing does not test, contact engineering.

Provided that casing test was good, proceed to step 9.

9. RU cement equipment. Pump water to assure that tubing is clear.
10. Plug 1. Mix and attempt to pump 10 sx class G cement through cement retainer and displace with 5.1 bbl water. If zone pressures up, sting back out of retainer and continue with Plug 2.

11. Plug 2. Fruitland, Kirtland, Ojo Alamo, and surface casing shoe. From 1130' to surface, mix and pump cement until cement circulation is achieved at surface.
12. RD cementing equipment. Cut off wellhead, fill annuli with cement as necessary. Install P&A marker as per regulatory requirements. Record GPS coordinates for P&A marker and the final P&A report. Photograph the P&A marker and attach to the report.
13. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
14. Send all reports and attachments to DJR Aztec office for regulatory filings.

Note: All cement is to be Class G mixed at 15.8 ppg, yield 1.15 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100 % excess.

DJR Operating, LLC
Current Wellbore Diagram

West Bisti Coal 25 1

API # 30-045-28559

NW/NE, Unit B, Sec 25, T25N, R13W
 San Juan County, NM

GL 6395'

KB N/A

Spud Date 6/28/1991

SURF CSG

Hole size 8.75"
 Csg Size: 7"
 Wt: 20#
 Grade: J-55
 ID: 6.456"
 Depth 130'
 casing cap ft³/ft: 0.2273
 TOC: Circ cmt
 to surface

FORMATION TOPS


Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	922'
Pictured Cliffs	1218'

PROD CSG

Hole size 6.25"
 Csg Size: 4.5"
 Wt: 9.5#
 Grade: J-55
 ID: 4.09"
 Depth 1288'
 casing cap ft³/ft: 0.0912
 7x4.5 capacity ft³/ft 0.1169
 TOC: Circ cmt
 to surface

Fruitland Coal perms
 1162-81'

PBTD 1262'
 TD 1289'

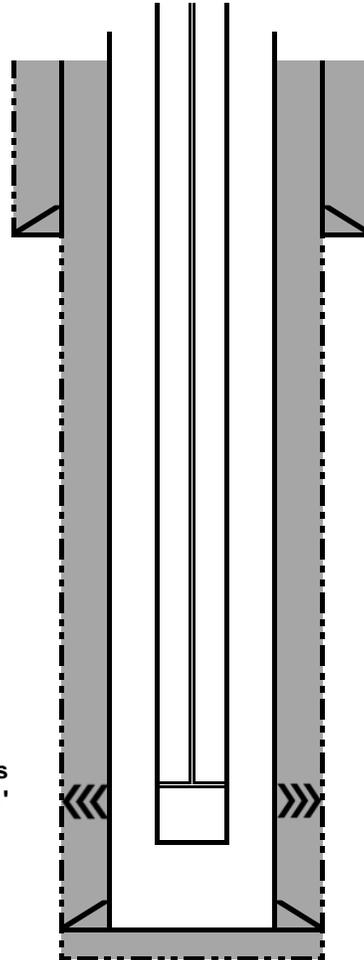

Production Tubing/Rod Detail
MA, SN, 37 jts. 2-3/8" tbg.
2"x1.5"x10' RWAC pump, 9x3/4" guided rods, 35x3/4" plain rods, 6'x2'x3/4" rod subs, 1-1/4"x16' polished rod, with 1-1/2"x10' liner.

DJR Operating, LLC
Proposed Wellbore Diagram

West Bisti Coal 25 1

API # 30-045-28559
 NW/NE, Unit B, Sec 25, T25N, R13W
 San Juan County, NM

GL 6395'
 KB N/A
 Spud Date 6/28/1991

SURF CSG

Hole size 8.75"
 Csg Size: 7"
 Wt: 20#
 Grade: J-55
 ID: 6.456"
 Depth 130'
 casing cap ft³/ft: 0.2273
 TOC: Circ cmt
 to surface

FORMATION TOPS

FORMATION TOPS	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	922'
Pictured Cliffs	1218'

Plug 2: 1130' to surface, to cover Fruitland, Kirtland, Ojo Alamo, surface shoe.


PROD CSG

Hole size 6.25"
 Csg Size: 4.5"
 Wt: 9.5#
 Grade: J-55
 ID: 4.09"
 Depth 1288'
 casing cap ft³/ft: 0.0912
 7x4.5 capacity ft³/ft 0.1169
 TOC: Circ cmt
 to surface

Cement Ret. 1130'
 Fruitland Coal perms
 1162-81'

Plug 1: Attempt to pump 10 sx class G cement through CR to Fruitland perms.

PBTD 1262'
 TD 1289'

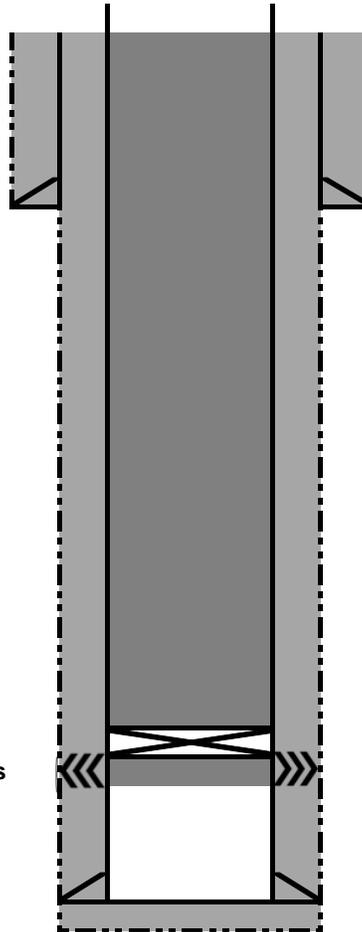

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

Attachment to Notice of Intention to Abandon:

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.

BLM FLUID MINERALS Geologic Report

Date Completed: 4/2/2021

Well No. West Bisti Coal 25 #1 (API# 30-045-28559)	Location	1200	FNL	&	1850	FEL
Lease No. NMNM-061273	Sec. 25	T25N			R13W	
Operator DJR Operating, LLC	County	San Juan		State	New Mexico	
Total Depth 1289'	PBTD 1262'	Formation Fruitland Coal (producing), Pictured Cliffs (TD)				
Elevation (GL) 6395'		Elevation (KB)				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/Fresh water sands
Nacimiento Fm					Fresh water sands
Ojo Alamo Ss					Aquifer (fresh water)
Kirtland Shale			Surface	922	
Fruitland Fm			922	1218	Coal/Gas/Possible water
Pictured Cliffs Ss			1218	PBTD	Gas
Lewis Shale					
Chacra					
Cliff House Ss					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					
Gallup					O&G/Water
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:

P & A

- P&A procedure has cement from the cement retainer @ 1130' to Surface which will protect any freshwater sands in this well bore.
- Fruitland Coal perforations @ 1162'-1181'.

Reference Well:

1) **Formation Tops**

Same

2) **Water Analysis**

N/A

Prepared by: Chris Wenman

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.

5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.

5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.

5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.

6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 26655

COMMENTS

Operator:	OGRID:	Action Number:	Action Type:
DJR OPERATING, LLC 1 Road 3263 Aztec, NM87410	371838	26655	C-103F

Created By	Comment	Comment Date
kpickford	KP GEO Review 5/5/2021	05/05/2021

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 26655

CONDITIONS OF APPROVAL

Operator:	DJR OPERATING, LLC	1 Road 3263	Aztec, NM87410	OGRID:	371838	Action Number:	26655	Action Type:	C-103F
OCD Reviewer	kpickford			Condition	None				