

Form 3160-5
(August 2007)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CARLSBAD FIELD OFFICE

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.5. Lease Serial No.
NMLC 0067775

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other2. Name of Operator
ROVER OPERATING LLC3a. Address
17304 PRESTON ROAD, SUITE 300, DALLAS, TX 752523b. Phone No. (include area code)
214-234-91154. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SURFACE LOCATION: B-27-09S-37E 660 FNL 1980 FEL
LAT/LONG: 33.5106468, -103.1385269 NAD83

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No.
U S M #0019. API Well No.
30-025-2432710. Field and Pool or Exploratory Area
SA11. Country or Parish, State
LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleting horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

MIRU
RIH, tag BP @ 4885'. Spot 25 sx cmt from 4885 - 4735. WOC Tag
Pump well bore w/ 324 sxs cmt to surface
Cut off wellhead, install ground level dry hole marker, clean location, RDMO

- ② Perf (Top San Andres) @ 4263, SQZ cmt to 4123. WOC Tag
③ Perf (Top Yates. B/salt) @ 2975. SQZ cmt to 2715. WOC Tag.
④ Perf (Top Salt) @ 2420. SQZ cmt to 2300. WOC Tag.
⑤ Perf (Shoe) @ 180 SQZ cmt to 380. WOC Tag.
⑥ Perf @ 60' SQZ cmt to Surf (3').

Below ground level dry Hole marker required

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)
Zach Dyer

Title Associate Engineer

Signature

Date 10/31/2019

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

SAET

Date

11-24-19

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

CFO

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

USM #1 Plugging Plan

MIRU

RIH, tag BP @ 4885'

Spot 25 sx cmt from 4885-4735. WOC TAG

Perf (Top San Andres) @ 4263', Sqz cmt to 4123'. WOC TAG

Perf (Top Yates, B/salt) @ 2975', Sqz cmt to 2715'. WOC TAG

Perf (Top Salts) @ 2420', Sqz cmt to 2300'. WOC TAG

Perf (Shoe) @ 480', Sqz cmt to 380', WOC TAG

Perf @ 60', Sqz cmt to surf (3')

Cut off wellhead, install ground level dry hole marker, clean location, RDMO

WELL NAME:	USM #1		FIELD:	Sawyer		GL:	3966	PBTD:	
LOCATION:	660' FNL & 1980' FEL	Sec. 27 T9S R37E	API #:	30-025-24327		KB:		TD:	5,095
COUNTY:	Lea		ST:	NM					
LAST UPDATED:	09/17/19		BY:	R. Sandmann		SPUD DATE:	01/01/73	COM DATE:	

CASING DETAILS


PURPOSE	SIZE	WEIGHT	GRADE	SET DEPTH	TOP OF CEMENT	NOTES
SURFACE	8-5/8"	24		430	Circ.	12-1/4" hole, 375 sxs
INTERMEDIATE						
PRODUCTION	4-1/2"	11.6		5,095	3998 (calc)	7-7/8" hole, 250 sxs
LINER						

TUBING DETAILS as of

DESCRIPTION	SIZE	WEIGHT	GRADE	TOP	BOTTOM	LENGTH	NOTES
	2-3/8"				4,910.00		

ROD DETAILS as of

DESCRIPTION	SIZE	WEIGHT	GRADE	LENGTH	NOTES

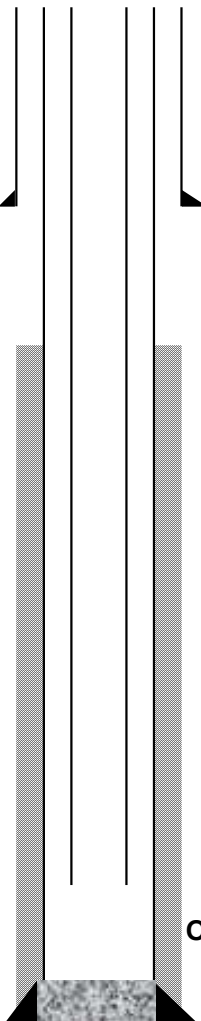

○ Perf: 4976-5022' w/ 11 holes

PBTD:

TD: 5,095'

Formation	Top
Red Beds	380
Rustler Anhydrite	2320
Yates	2925
7 Rivers	3050
Queen	3685
Grayburg	3956
San Andres	4213

Hole Size 12 1/4"325 SXS CementTOC At Surf8 5/8" ^{24#} Casing Set at 430Hole Size 7 7/8"250 SXS CementTOC At 4380 Est TOC

⑥ Perf @ 60' SQZ cmt to surf (3').

⑤ Perf (Shoe) @ 480, SQZ cmt to 380. WOC Tag.

④ Perf (T/salt) @ 2420, SQZ cmt to 2300. WOC Tag

③ Perf (Top Yates/B/salt) @ 2975, SQZ cmt to 2715. WOC Tag.

② Perf (Top San Andres) @ 4263, SQZ cmt to 4123 WOC Tag.

① RIH Tag BP @ 4885. Spot 25' SX. cmt 4885-4735 WOC Tag.

11.6 H J-55

4 1/2" Casing Set at 5095TD At 5095 PETDOperator Rover

Well Name/NO. U.S.M. #1

API 30025243276600'S 1980 (EW) Sec. 27T 9 S, R 37 E Lea CTY

R-111-P

Secretary Potash

Cave/Karst

⑤ LPS Habitat

Top Salt

Base Salt

FORMATIONS

④ Red Beds 380

Rustler 3320

Yates 2925

7 Rivers 3050

Ou 3685

③ GB 3956

SA 4213

DVT

PERFORATIONS

4976

5022

①

BP 4885

James A. Amos

575-234-5909

575-361-2648

USM #1 Plugging Plan

MIRU

RIH, tag BP @ 4885'

Spot 25 sx cmt from 4885-4735. WOC TAG

Perf (Top San Andres) @ 4263', Sqz cmt to 4123'. WOC TAG

Perf (Top Yates, B/salt) @ 2975', Sqz cmt to 2715'. WOC TAG

Perf (Top Salts) @ 2420', Sqz cmt to 2300'. WOC TAG

Perf (Shoe) @ 480', Sqz cmt to 380', WOC TAG

Perf @ 60', Sqz cmt to surf (3')

Cut off wellhead, install ground level dry hole marker, clean location, RDMO

WELL NAME:	USM #1		FIELD:	Sawyer		GL:	3966	PBTD:	
LOCATION:	660' FNL & 1980' FEL	Sec. 27 T9S R37E	API #:	30-025-24327		KB:		TD:	5,095
COUNTY:	Lea		ST:	NM					
LAST UPDATED:	09/17/19		BY:	R. Sandmann		SPUD DATE:	01/01/73	COM DATE:	

CASING DETAILS


PURPOSE	SIZE	WEIGHT	GRADE	SET DEPTH	TOP OF CEMENT	NOTES
SURFACE	8-5/8"	24		430	Circ.	12-1/4" hole, 375 sxs
INTERMEDIATE						
PRODUCTION	4-1/2"	11.6		5,095	3998 (calc)	7-7/8" hole, 250 sxs
LINER						

TUBING DETAILS as of

DESCRIPTION	SIZE	WEIGHT	GRADE	TOP	BOTTOM	LENGTH	NOTES
	2-3/8"				4,910.00		

ROD DETAILS as of

DESCRIPTION	SIZE	WEIGHT	GRADE	LENGTH	NOTES

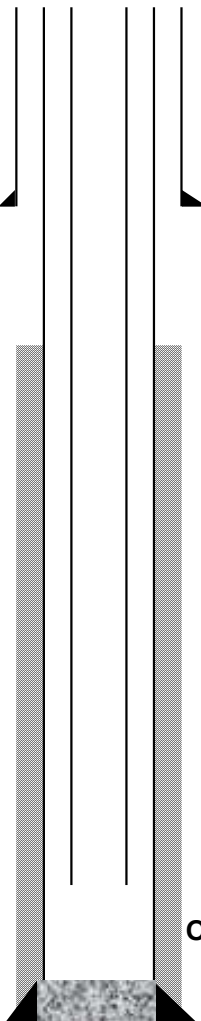

○ Perf: 4976-5022' w/ 11 holes

PBTD:

TD: 5,095'

Formation	Top
Red Beds	380
Rustler Anhydrite	2320
Yates	2925
7 Rivers	3050
Queen	3685
Grayburg	3956
San Andres	4213

Hole Size 12 1/4"325 SXS CementTOC At Surf8 5/8" ^{24#} Casing Set at 430Hole Size 7 7/8"250 SXS CementTOC At 4380 Est TOC

⑥ Perf @ 60' SQZ cmt to Surf (3').

⑤ Perf (Shoe) @ 480, SQZ cmt to 380. WOC Tag.

④ Perf (T/salt) @ 2420, SQZ cmt to 2300. WOC Tag

③ Perf (Top Yates/B/salt) @ 2975, SQZ cmt to 2715. WOC Tag.

② Perf (Top San Andres) @ 4263, SQZ cmt to 4123 WOC Tag.

① RIH Tag BP @ 4885, Spot 25 SX. cmt 4885-4735 WOC Tag.

11.6 H J-55

4 1/2" Casing Set at 5095TD At 5095 PCTDOperator Rover

Well Name/NO. U.S.M. #1

API 30025243276600'S 1980 (EW) Sec. 27T 9 S, R 37 E Lea CTY

R-111-P

Secretary Potash

Cave/Karst

⑤ LPS Habitat

Top Salt

Base Salt

FORMATIONS

④ Red Beds 380

Rustler 3320

Yates 2925

7 Rivers 3050

Ou 3685

③ GB 3956

SA 4213

DVT

PERFORATIONS

② 4976 5022

① BP 4885

James A. Amos

575-234-5909

575-361-2648

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 54551

CONDITIONS

Operator: ROVER OPERATING, LLC 17304 Preston Road Dallas, TX 75252	OGRID: 371484
	Action Number: 54551
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Like approval from BLM	10/26/2021