

Form 3160-5  
(August 2007)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No. 1004-0137  
Expires July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*5. Lease Serial No.  
NMNM71036X

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3a. Address

P.O. Box 960 Artesia, NM 88210-0960

3b. Phone No. (include area code)

(575) 748-1288

4. Location of Well (Footage, Sec., T.R.M., or Survey Description)

2310 FNL &amp; 1650 FWL, Sec. 22 T15S R29E

7. If Unit of CA/Agreement, Name and/or No.

NMNM71036X

8. Well Name and No.

South Lucky Lake Queen Unit #1B

9. API Well No.

30-005-60213

10. Field and Pool or Exploratory Area

41320 Lucky Lake Queen, South

11. Country or Parish, State

Chaves, NM

## 12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleting horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Mack Energy proposes to P&amp;A the South Lucky Lake Queen Unit #1B within the first quarter of 2022.

## Procedure

1. MIRU plugging equipment. POH w/ 1721' of 2" tbg
1. Set 5 1/2" CIBP@ 1730'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt@ 1730-1530'.
2. Spot 25 sx cmt@ 1090-890'. WOC & Tag (Yates)
3. Spot 40 sx cmt@ 330 to surface (T/Salt & 8 5/8" Shoe)
4. Cut off well head, verify cmt@ surface, install Dry Hole Marker.

See Conditions of Approval

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

Jerry W. Sherrell

Title Regulatory Supervisor

Signature

Date 10/18/21

Accepted for record - NMOCD gc 1/27/2022

## THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Petroleum Engineer

10/19/2021

Title

Date

Office

RFO

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)





## Plug Abandonment NOI Proposed


<b>OPERATOR NAME:</b>	Bar V Barb, LLC
<b>LEASE NO.:</b>	NMNM71036X
<b>WELL NAME &amp; NO.:</b>	South Lucky Lake Queen Unit #1B
<b>US WELL NUMBER:</b>	30-005-60213
<b>LOCATION:</b>	Sec 22, T15S, R29E
<b>COUNTY:</b>	Chaves, New Mexico

1. MIRU plugging equipment. POH w/ 1721' of 2" tbg
1. Set 5 1/2" CIBP @ 1730'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 1730-1530'.
2. Spot 25 sx cmt @ 1090-890'. WOC & Tag (Yates)
3. Spot 40 sx cmt @ 330 to surface (T/Salt & 8 5/8" Shoe)
4. Cut off well head, verify cmt @ surface, cut of Dry Hole Marker.

Bar V Barb, LLC		Current	
Author:	Abby @ BCM		
Well Name	South Lucky Lake Qn Unit	Well No.	#1B
Field/Pool		API #:	30-005-60213
County	Chaves	Location:	Sec 22, T15S, R29E
State	New Mexico		2310 FNL & 1650 FWL
Spud Date	4/18/1972	GL:	3832

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8		20#	279	11	150	0
Prod Csg	5 1/2		14#	1,826	8	275	0


Formation	Top
Rustler	245
Salado	274
Yates	1041
7 Rivers	1171

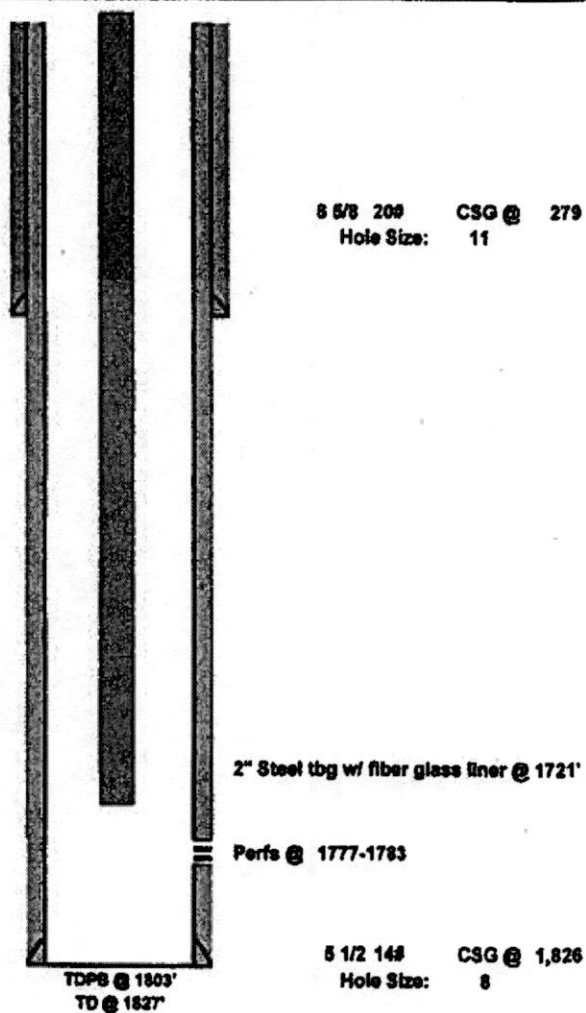

Bar V Barb, LLC		Proposed	
Author:	Abby @ BCM	Well No.	#1B
Well Name	South Lucky Lake Qn Unit	API #:	30-005-60213
Field/Pool		Location:	Sec 22, T15S, R29E
County	Chaves		2310 FNL & 1650 FWL
State	New Mexico	GL:	3832
Spud Date	4/18/1972		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8		20#	279	11	150	0
Prod Csg	5 1/2		14#	1,826	8	275	0

Formation	Top
Rustler	245
Salado	274
Yates	1041
7 Rivers	1171

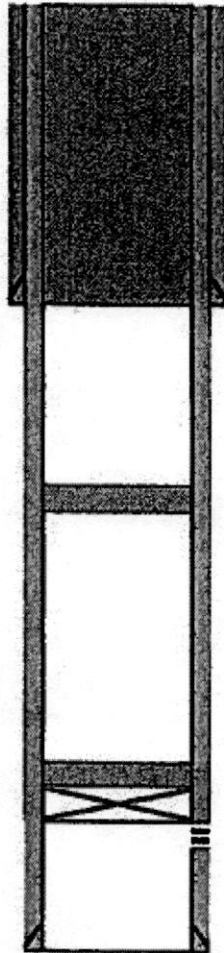

TDPB @ 1803'  
TD @ 1827'

8 5/8 20# CSG @ 279  
Hole Size: 11

1. Spot 40 ex cmt @ 330 to surface (T/Salt & 8 5/8" Shoe)

2. Spot 25 ex cmt @ 1090-890'. WOC & Tag (Yates)

1. Set 5 1/2" CIBP @ 1730'. Circ hole w/ MLF. Pressure test csg. Spot 25 ex cmt @ 1730-1530'.

Perfs @ 1777-1783

5 1/2 14# CSG @ 1,826  
Hole Size: 8

**South Lucky Lake Queen Unit 1B  
30-005-60213  
Mack Energy Corporation  
October 19, 2021  
Conditions of Approval**

- 1. Operator shall place CIBP at 1,727' (50'-100' above top most perf) and place 25 sx of Class C cement on top as proposed. WOC and TAG.**
- 2. Operator shall place a Class C cement plug from 1,090'-890' to seal the Yates Formation and the Bottom of the Salt.**
- 3. Operator shall perf at 329' and squeeze class C Cement to surface to seal the top of Salt and the 8-5/8" casing shoe.**
- 4. Surface reclamation will need to be completed once the well bore has been plugged. Please contact [rflores@blm.gov](mailto:rflores@blm.gov) for additional information.**
- 5. See Attached for general plugging stipulations.**

**JAM 10192021**

**BUREAU OF LAND MANAGEMENT**  
**Roswell Field Office**  
**2909 W. Second Street**  
**Roswell, New Mexico 88201**  
**575-627-0272**

**General Requirements for Plug Backs**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from this approval.

**If you are unable to plug back the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.**

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. **Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Subsequent Plug back Reporting: Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS  
  
Action 75936

CONDITIONS

Operator: BAR V BARB LLC P.O. Box 4435 Roswell, NM 88202	OGRID: 371067
	Action Number: 75936
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	1/27/2022