

Well Name: BOB BREWER COM	Well Location: T25N / R12W / SEC 21 / NWSW / 36.38565 / -108.12177	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM51013	Unit or CA Name: BOB BREWER	Unit or CA Number: NMNM76405
US Well Number: 3004526711	Well Status: Oil Well Shut In	Operator: DJR OPERATING LLC

Notice of Intent

Sundry ID: 2651192

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 01/05/2022

Time Sundry Submitted: 11:30

Date proposed operation will begin: 01/05/2022

Procedure Description: DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram and Reclamation Plan.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Bob_Brewer_1_Reclamation_Plan_20220105113041.pdf

Bob_Brewer_1_Proposed_WBD_20220105113040.pdf

Bob_Brewer_1_PA_Procedure_20220105113041.pdf

Bob_Brewer_1_Current_WBD_20220105113040.pdf

Well Name: BOB BREWER COM

Well Location: T25N / R12W / SEC 21 / NWSW / 36.38565 / -108.12177

County or Parish/State: SAN JUAN / NM

Well Number: 1

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM51013

Unit or CA Name: BOB BREWER

Unit or CA Number: NMNM76405

US Well Number: 3004526711

Well Status: Oil Well Shut In

Operator: DJR OPERATING LLC

Conditions of Approval

Additional Reviews

2651192_NOIA_1_3004526711_KR_01102022_20220110171343.pdf

General_Requirement_PxA_20220110171328.pdf

25N12W21LKg_Bob_Brewer_Com_1_20220110160118.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 05, 2022 11:30 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 Road 3263

City: Aztec

State: NM

Phone: (505) 632-3476

Email address: sford@djrlc.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Approved

Disposition Date: 01/10/2022

Signature: Kenneth Rennick

Plug and Abandonment Procedure
for
DJR Operating, LLC
Bob Brewer 1
API # 30-045-26711
NW/SW, Unit L, Sec. 21, T25N, R12W
San Juan County, NM

I.

1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. MIRU prep rig.
3. Check and record tubing, casing and bradenhead pressures.
4. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
5. MIRU hot oil unit, pump hot water to clear rods and tubing of paraffin.
6. Trip out of hole with rods and pump. Lay down to be sent in for storage/salvage.
7. Unset TAC.
8. ND WH, NU BOP, function test BOP.
9. Trip out of hole with 2 3/8" tubing. LD tubing to be sent in for storage/salvage.
10. RDMO prep rig to next location.

II.

11. MIRU P&A rig and equipment.
12. PU workstring, TIH to 4812'.
13. Plug 1. Perforations and Gallup top: With end of tubing at 4812', mix and pump sufficient cement to bring top of cement to 4575'. PU and pump water to ensure that tubing is clear. WOC. Tag TOC.

14. Drop standing valve and pressure test tubing to 1000 psi. Retrieve standing valve. Pressure test casing to 600 psi. If casing does not test, notify office. If test is good, continue with Plug 2.
15. Plug 2. Mancos: Mix and spot a balanced plug from 3763-3663'. PU and pump water to ensure that tubing is clear.
16. Plug 3. Mesa Verde and Chacra: Mix and spot a 533' balanced plug from 1949-1416'. PU and pump water to ensure that tubing is clear.
17. Plug 4: Pictured Cliffs, Fruitland: Mix and spot a 560' balanced plug from 1174-614'. PU and pump water to ensure that tubing is clear.
18. Plug 5: Kirtland, Ojo Alamo, and surface: Mix and spot a 494' balanced plug from 494' to surface. Top off 8-5/8x5-1/2" annulus through 1" tubing, if necessary.
19. RD cementing equipment. Cut off wellhead, fill any exposed annulus with cement as necessary. Install P&A marker as per regulatory requirements. Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report.
20. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
21. Send all reports and attachments to DJR Aztec office for regulatory filings.

Note: All cement is to be Class G mixed at 15.8 ppg, yield 1.15 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

Current Wellbore Diagram
DJR Operating, LLC
Bob Brewer 1
 API # 30-045-26711
 NW/SW, Unit L, Sec 21, T25N, R12W
 San Juan County, NM

GL 6290'
 KB 6303'
 Spud Date 2/27/1986

SURF CSG


Hole size 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: J-55
 ID: 8.097"
 Depth 262'
 Csg cap ft³: 0.3576
 TOC: Surf

FORMATION TOPS

Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	444'
Fruitland	664'
Pictured Cliffs	1124'
Chacra	1466'
Mesaverde	1899'
Mancos	3713'
Gallup	4625'

PROD CSG

Hole size 7.875"
 Csg Size: 5.5"
 Wt: 15.5#
 Grade: K-55
 ID: 4.95"
 Depth 4902'
 Csg cap ft³: 0.1336
 Csg/Csg Ann ft³: 0.1926
 Csg/OH cap ft³: 0.1732
 TOC: Circ cement to surface

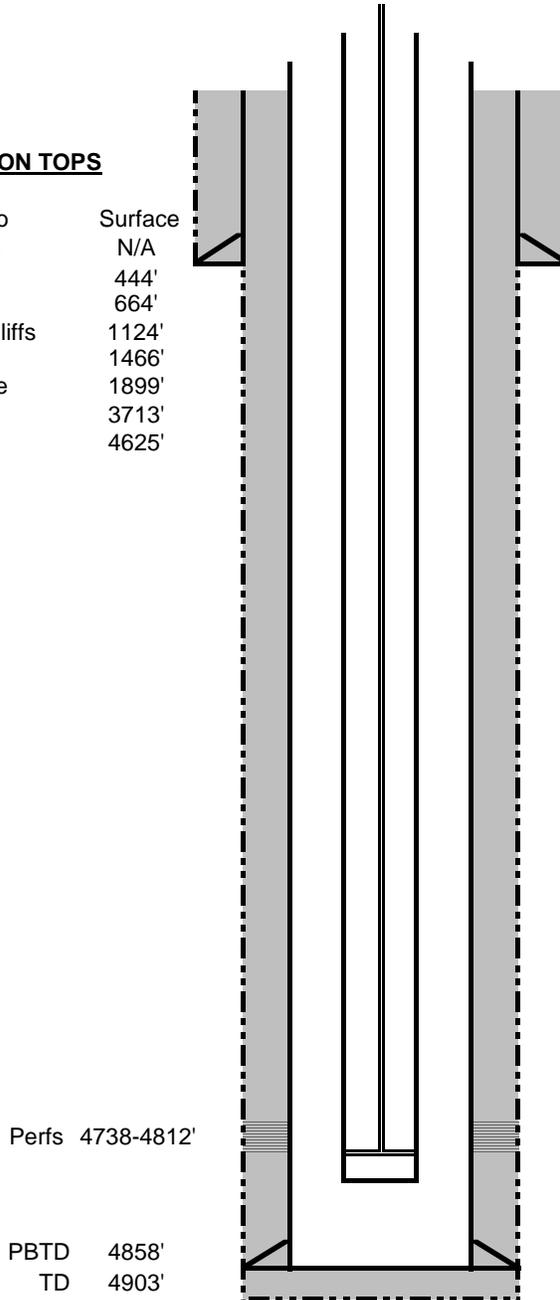

Perfs 4738-4812'

PBTD 4858'
 TD 4903'

TUBING DETAIL
MA, 4' PS, SN, 5 jts. 2-3/8" tbg., TAC, 140 jts. 2-3/8" tbg. EOT 4752'. SN 4715'.
ROD DETAIL
2x1-1/2x16' RWAC pump, 5x3/4" rods with snap on guides, 182x3/4" plain rods, 8'x3/4" sub, 1-1/4"x22' polished rod with 1-1/2"x10' liner.

Proposed Wellbore P&A Diagram
DJR Operating, LLC
Bob Brewer 1
 API # 30-045-26711
 NW/SW, Unit L, Sec 21, T25N, R12W
 San Juan County, NM

GL 6290'
 KB 6303'
 Spud Date 2/27/1986

SURF CSG

Hole size 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: J-55
 ID: 8.097"
 Depth 262'
 Csg cap ft3: 0.3576
 TOC: Surf

FORMATION TOPS

Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	444'
Fruitland	664'
Pictured Cliffs	1124'
Chacra	1466'
Mesaverde	1899'
Mancos	3713'
Gallup	4625'

PROD CSG

Hole size 7.875"
 Csg Size: 5.5"
 Wt: 15.5#
 Grade: K-55
 ID: 4.95"
 Depth 4902'
 Csg cap ft3: 0.1336
 Csg/Csg Ann ft3: 0.1926
 Csg/OH cap ft3: 0.1732
 TOC: Circ cement to surface

Plug 5: Kirtland, Ojo Alamo, surface shoe, and surface plug: Spot 494' balanced plug from 494' to surface.

Plug 4: Pictured Cliffs, Fruitland: Spot 560' balanced plug from 1174-614'.


Plug 3: Mesaverde, Chacra: Spot 533' balanced plug from 1949-1416'.

Plug 2: Mancos: Spot balanced plug from 3763-3663'.

Plug 1: Perfs and Gallup top. Spot 237' balanced plug from 4812-4575'

Perfs 4738-4812'

PBTD 4858'
 TD 4903'

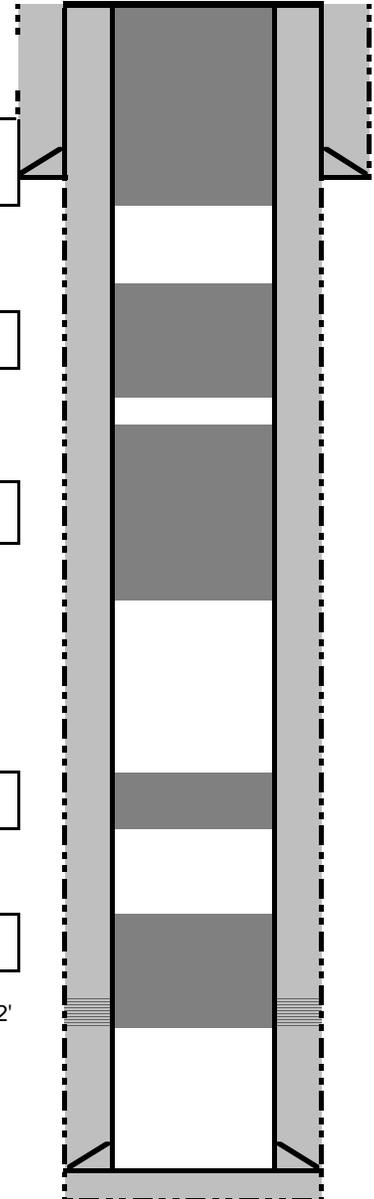

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
 - 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
 - 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.3 Surface plugs may be no less than 50' in length.
 - 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
 - 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
 - 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2651192

Attachment to notice of Intention to Abandon

Well: Bob Brewer Com 1

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 1/10/2022

**BLM FLUID MINERALS
P&A Geologic Report**

Date Completed: 01/10/2022

Well No. Bob Brewer Com #1 (API# 30-045-26711)	Location	2310	FSL	&	990	FWL
Lease No. NMNM-51013	Sec. 21	T25N			R12W	
Operator DJR Operating, LLC	County	San Juan		State	New Mexico	
Total Depth 4903'	PBTD 4858'	Formation Gallup				
Elevation (GL) 6290'		Elevation (KB) 6363'				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					
Nacimiento Fm			Surface	300	Surface/freshwater sands
Ojo Alamo Ss			300	444	Aquifer (possible freshwater)
Kirtland Shale			444	654	
Fruitland Fm			654	1124	Coal/Gas/Possible water
Pictured Cliffs Ss			1124	1276	Gas
Lewis Shale			1276	1466	
Chacra			1466	1899	Gas
Cliff House Ss			1899	1998	Water/Possible gas
Menefee Fm			1998	3530	Coal/Ss/Water/Possible O&G
Point Lookout Ss			3530	3713	Probable water/Possible O&G
Mancos Shale			3713	4625	
Gallup			4625	PBTD	O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:

P & A

- BLM pick for the Ojo Alamo formation top varies from Operator. Plug proposed in the P&A procedure is sufficient to cover BLM pick.
- No CBL on file.
- The plugs proposed in the P&A procedure will adequately protect any freshwater sands in this well bore.
- Gallup perms 4738' – 4812'.

Reference Well:

1) **Formation Tops**
Same

Prepared by: *Chris Wenman*

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720
District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 89894

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 89894
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	3/15/2022
kpickford	Adhere to BLM approved plugs and COAs. See GEO Report	3/15/2022