

Form 3160-3
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMSF78768
1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No. ROSA UNIT- MANCOS PA / NMNM 078
2. Name of Operator LOGOS OPERATING LLC		8. Lease Name and Well No. ROSA UNIT 836H
3a. Address 2010 AFTON PLACE, FARMINGTON, NM 87401	3b. Phone No. (include area code) (505) 278-8720	9. API Well No. 30-039-31422
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWNW / 537 FNL / 483 FWL / LAT 36.861891 / LONG -107.320923 At proposed prod. zone NENE / 526 FNL / 153 FEL / LAT 36.861915 / LONG -107.28781		10. Field and Pool, or Exploratory BASIN MANCOS/BASIN MANCOS
14. Distance in miles and direction from nearest town or post office* 38 miles		11. Sec., T. R. M. or Blk. and Survey or Area SEC 36/T31N/R5W/NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 153 feet	16. No of acres in lease 627.31	12. County or Parish RIO ARRIBA
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 9 feet	19. Proposed Depth 7148 feet / 17045 feet	13. State NM
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6563 feet	20. BLM/BIA Bond No. in file FED: NMB001821	17. Spacing Unit dedicated to this well
22. Approximate date work will start* 01/03/2022		23. Estimated duration 45 days
24. Attachments		
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)		
1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).		4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM.
25. Signature (Electronic Submission)	Name (Printed/Typed) ETTA TRUJILLO / Ph: (505) 324-4145	Date 12/14/2021
Title Regulatory Specialist		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) DAVE J MANKIEWICZ / Ph: (505) 564-7761	Date 03/31/2022
Title AFM-Minerals Office Farmington Field Office		
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.		

APPROVED WITH CONDITIONS

(Continued on page 2)

*(Instructions on page 2)

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to a new evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NWNW / 537 FNL / 483 FWL / TWSP: 31N / RANGE: 5W / SECTION: 36 / LAT: 36.861891 / LONG: -107.320923 (TVD: 0 feet, MD: 0 feet)

PPP: NWNE / 0 FNL / 0 FWL / TWSP: 31N / RANGE: 4W / SECTION: 31 / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

PPP: LOT 1 / 0 FNL / 0 FWL / TWSP: 31N / RANGE: 4W / SECTION: 31 / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

PPP: NWNW / 505 FNL / 655 FWL / TWSP: 31N / RANGE: 5W / SECTION: 36 / LAT: 36.86198 / LONG: -107.320335 (TVD: 7148 feet, MD: 7530 feet)

BHL: NENE / 526 FNL / 153 FEL / TWSP: 31N / RANGE: 4W / SECTION: 31 / LAT: 36.861915 / LONG: -107.28781 (TVD: 7148 feet, MD: 17045 feet)

BLM Point of Contact

Name: RYAN JOYNER

Title: Physical Scientist

Phone: (970) 385-1242

Email: rjoyner@blm.gov

CONFIDENTIAL

District I
1625 N. French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-31422	² Pool Code 97232	³ Pool Name BASIN MANCOS
⁴ Property Code 320608	⁵ Property Name ROSA UNIT	⁶ Well Number 836H
⁷ OGRID No. 289408	⁸ Operator Name LOGOS OPERATING, LLC	⁹ Elevation 6563'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	36	31N	5W		537	NORTH	483	WEST	RIO ARriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	31	31N	4W		526	NORTH	153	EAST	RIO ARriba
¹² Dedicated Acres 627.31	N/2 - Section 36, T31N, R5W N/2 - Section 31, T31N, R4W				¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-13457		

SURFACE LOCATION (A)
537' FNL 483' FWL
SECTION 36, T31N, R5W
LAT: 36.861885°N
LONG: 107.320322°W
DATUM: NAD1927

N79°00.8'E 174.9'

FIRST TAKE POINT (B)
505' FNL 655' FWL
SECTION 36, T31N, R5W
LAT: 36.861974°N
LONG: 107.319734°W
DATUM: NAD1927

N89°49.5'E 9338.0'

FIRST PERFORATION (C)
524' FNL 330' FEL
SECTION 31, T31N, R4W
LAT: 36.861910°N
LONG: 107.287815°W
DATUM: NAD1927

N89°49.5'E 177.0'

LAST TAKE POINT (D)
526' FNL 153' FEL
SECTION 31, T31N, R4W
LAT: 36.861909°N
LONG: 107.287210°W
DATUM: NAD1927

LAT: 36.861891°N
LONG: 107.320923°W
DATUM: NAD1983

LAT: 36.861980°N
LONG: 107.320335°W
DATUM: NAD1983

LAT: 36.861917°N
LONG: 107.288415°W
DATUM: NAD1983

LAT: 36.861915°N
LONG: 107.287810°W
DATUM: NAD1983

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Etta Trujillo 12/6/2021
Signature Date
Etta Trujillo
Printed Name
etrujillo@logosresourcesllc.com
E-mail Address

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.


Date Revised: DECEMBER 6, 2021
Date of Survey: APRIL 20, 2016

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

NO ALLOWABLE WILL BE
ASSIGNED TO THIS COMPLETION
UNTIL ALL INTERESTS HAVE
BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN
APPROVED BY THE DIVISION

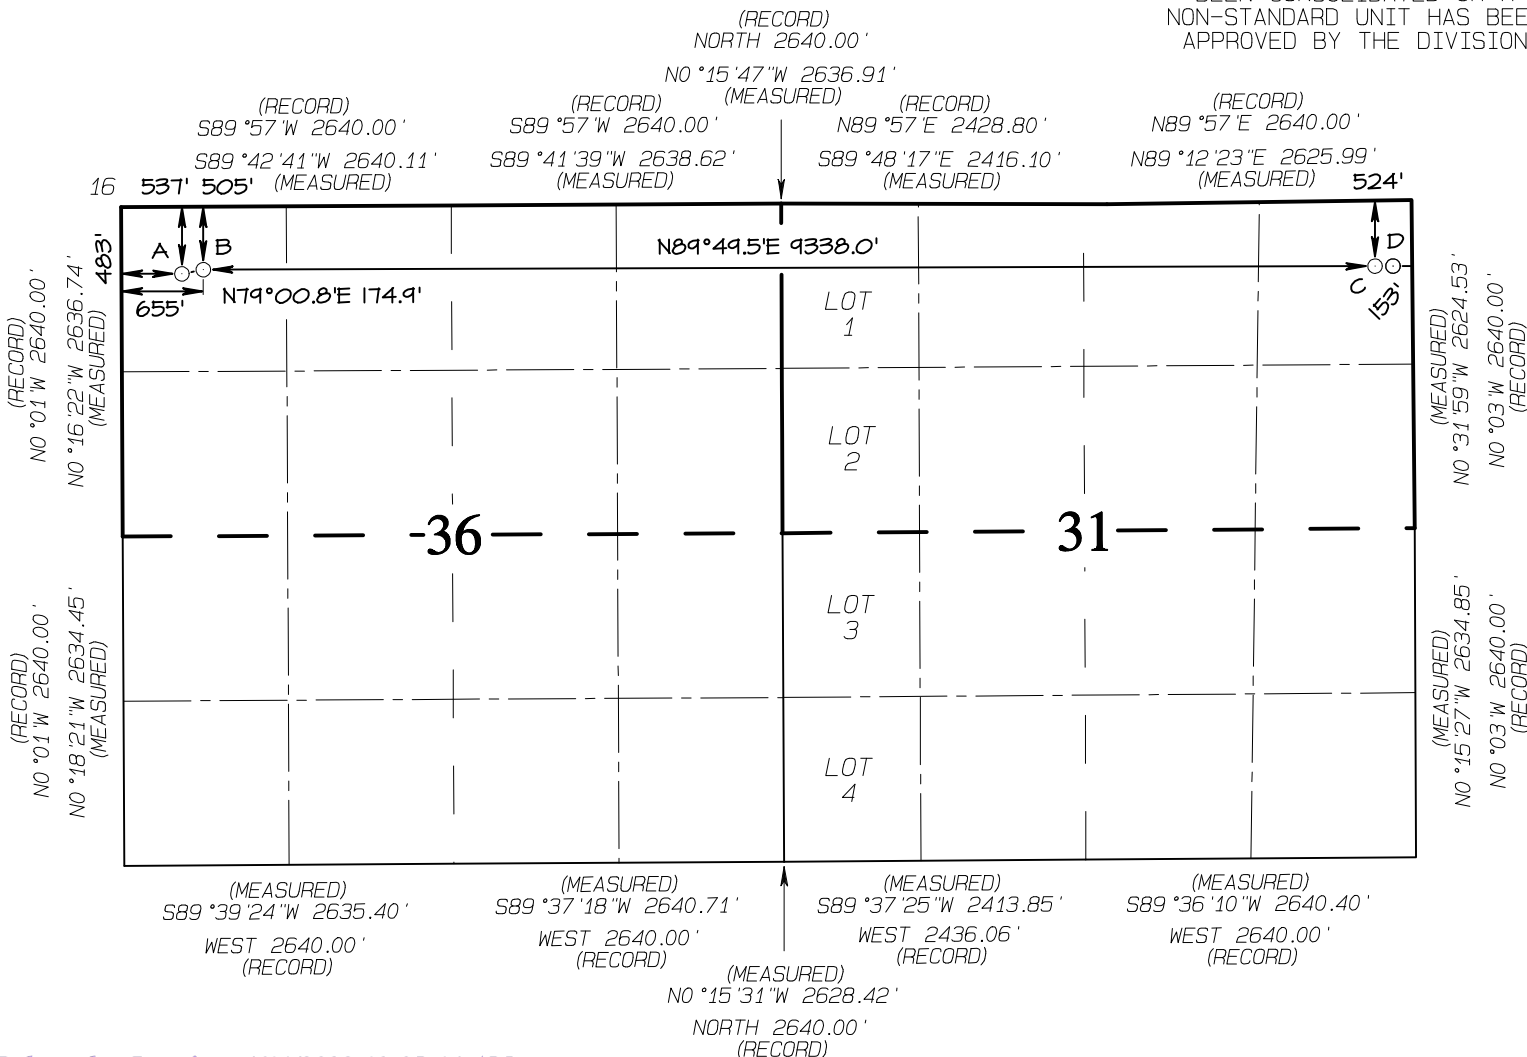

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: LOGOS Operating, LLC **OGRID:** 289408 **Date:** 12/03/2021

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Rosa Unit 832H	30-039-	D 36 T31N R5W	604FNL 448FWL	N/A	8,286	454
Rosa Unit 834H	30-039-	D 36 T31N R5W	617FNL 440FWL	N/A	10,651	520
Rosa Unit 836H	30-039-	D 36 T31N R5W	537FNL 483FWL	N/A	9,068	520

IV. Central Delivery Point Name: Harvest Gathering System [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Rosa Unit 832H	30-039-	Pending	Pending	Pending	Pending	Pending
Rosa Unit 834H	30-039-	Pending	Pending	Pending	Pending	Pending
Rosa Unit 836H	30-039-	Pending	Pending	Pending	Pending	Pending

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	
Printed Name:	Etta Trujillo
Title:	Regulatory Specialist
E-mail Address:	etrujillo@logosresourcesllc.com
Date:	12/03/2021
Phone:	(505) 324-4154
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

LOGOS Operating, LLC

VI. Separation Equipment

The operator will select separation equipment for the maximum anticipated throughput and pressure to optimize gas capture. Separation equipment is sized according to manufacturer's design specifications. Separation vessels are built following the A.S.M.E. section VII division 1 codes for pressure vessel design, fabrication, inspection, testing and certification. Anticipated well pressures and production rates are evaluated to select separation equipment according to the equipment's designed operating pressure and throughput.

After completion, the operator utilizes flowback equipment, including separators, to manage wellbore fluids and solids during the initial separation period. After the initial flowback period is complete the operator utilizes iterative facility separation equipment to ensure that optimal separation is achieved.

VII. Operational Practices 19.15.27.8 NMAC A through F

- A. The operator will maximize the recovery of natural gas and minimize the amount of gas vented or flared when technically and safely feasible as further described and detailed within the following subsections (B-F of 19.15.27.8). In all cases where natural gas venting and flaring requires regulatory reporting, reporting will be submitted accurately and within the required time frames.
- B. Venting and flaring during drilling operations:
 - a. New Drill HZ Gas Wells: The operator drills wells in the area by utilizing a balanced mud to safely drill the wellbore. This technique prevents gas from coming to surface during the drilling process. If there is an emergency or malfunction and natural gas does come to surface the natural gas will be captured and routed to sales if technically and safely feasible.
- C. Venting and flaring during completion or recompletion operations:
 - a. New Drill HZ Gas Wells: The operator's facilities are designed to handle the maximum throughput and pressures from the newly drilled and completed wellbores. The amount of gas vented and flared will be minimized when technically and safely feasible. During initial flowback and initial separation flowback the operator will utilize contracted flowback equipment, including separators, to manage wellbore fluids and solids. The initial flowback period will be minimized and flow will be sent to separation equipment as soon as possible to reduce the amount of gas that is vented to atmosphere. The natural gas will be utilized on site as needed for fuel gas and natural gas will be sold.
- D. Venting and flaring during production operations:
 - a. New Drill HZ Gas Wells: The operator's facilities are designed to handle the maximum throughput and pressures from producing wellbores. The amount of gas vented and flared will be minimized when technically and safely feasible.

Operations will effectively manage the following scenarios to minimize the quantity of natural gas that is vented or flared:

- (a) If there is an emergency or malfunction vented or flared natural gas will be reported, if required, and the emergency or malfunction will be resolved as soon as technically and safely feasible.
- (b) If the wellbore needs to be unloaded to atmosphere the operator will not vent the well after the well has achieved a stabilized rate and pressure. The operator will remain on site during unloading. Plunger lift systems will be optimized to reduce the amount of natural gas venting. Downhole maintenance, such as workovers, swabbing, etc. will only be conducted as needed and best management practices will be utilized to reduce venting of natural gas.
- (c) The operator will minimize the amount of time that natural gas is vented to atmosphere from gauging and sampling a storage tank or low-pressure vessel, automatic tank gauges will be the primary means of gauging. The formation is only anticipated to produce water and therefore tank emissions are anticipated to be negligible.
- (d) The operator will reduce the amount of time needed for loading out liquids from a storage tanks or other low-pressure vessels whenever feasible. Operations will always utilize the water transfer systems when available. Water loading emissions are anticipated to be negligible.
- (e) Equipment will be repaired and maintained routinely to minimize the venting or flaring of natural gas. Repairs and maintenance will be conducted in a manner that minimizes the amount of natural gas vented to atmosphere through the isolation of the equipment that is being repaired or maintained.
- (f) Electric controllers and pumps will be installed to replace pneumatic controllers whenever feasible. Pneumatic controllers and pumps will be inspected frequently to ensure that no excess gas is vented to atmosphere.
- (g) No dehydration or amine units are anticipated to be set on location.
- (h) Compressors, compressor engines, turbines, flanges, connectors, valves, storage tanks, and other low-pressure vessels and flanges will be routinely inspected to ensure that no excess venting occurs outside of normal operations.
- (i) Regulatory required testing, such as bradenhead and packer testing will be performed in a manner that minimizes the amount of natural gas vented to atmosphere.
- (j) If natural gas does not meet gathering pipeline specifications gas samples will be collected twice per week to determine when pipeline specification gas content has been achieved. During this time frame gas will be flared and not vented to atmosphere. Natural gas that meets pipeline specifications will be sold via pipeline and natural gas that can be utilized for fuel gas will be used during this time.
- (k) If pipeline, equipment, or facilities need purged of impurities gas losses will be minimized as much as technically and safely feasible.

E. Performance standards:

- a. The production facilities are designed to handle the maximum throughput and pressures from producing wellbores and will be designed to minimize waste. The amount of gas vented and flared will be minimized when technically and safely feasible.
- b. All tanks that are routed to a control device that is installed after 5/25/2021 will have an automatic gauging system to minimize the amount of vented natural gas.
- c. If a flare stack is installed or replaced after 5/25/2021 it will be equipped with an automatic ignitor or continuous pilot. The flare stack will be properly sized and designed to ensure proper combustion efficiency. The flare stack will be located 100 feet away from the nearest wellhead or storage tank.
- d. AVO inspections will be conducted weekly for the year after completion and for all wells producing greater than 60,000 cubic feet of natural gas daily. The AVO inspection will include all components, including flare stacks, thief hatches, closed vent systems, pumps, compressors, pressure relief devices, valves, lines, flanges, connectors, and associated pipeline to identify any leaks and releases by comprehensive auditory, visual, and olfactory inspection. The AVO inspection records will be maintained for 5 years which will be available at the department's request. Identified leaks will be repaired as soon as feasible to minimize the amount of vented natural gas.

F. Measurement or estimation of vented and flared natural gas.

- a. The volume of natural gas that is vented, flared or consumed for beneficial use will be measured when possible, or estimated, during drilling, completions, or production operations.
- b. Equipment will be installed to measure the volume of natural gas flared for all APD's issued after 5/25/2021 on facilities that will have an average daily gas rate greater than 60,000 cubic feet of natural gas. Measurement equipment will conform to API MPMS Chapter 14.10 regulations. The measurement equipment will not have a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment. If metering is not practical then the volume of gas will be estimated.



LOGOS Operating, LLC Operations Plan

Note: This procedure will be adjusted onsite based upon actual conditions

Date:	December 10, 2021	Pool:	Basin Mancos
Well Name:	Rosa Unit 836H	GL Elevation:	6,563'
Surface Location:	Sec 36, T31N, R5W 537 FNL, 483 FWL (36.861891° N, 107.320923° W – NAD83)	Measured Depth:	17,045' (GL)
Bottom Hole Location:	Sec 31, T31N, R4W 526 FNL, 153 FEL (36.861915° N, 107.287810° W – NAD83)	County:	Rio Arriba

Lease Serial #NMSF078768, CA Serial #NMNM78407E

I. GEOLOGY

A. Formation Tops (Based on GL Elevation): Estimated top of important geological markers:
SURFACE FORMATION – NACIMIENTO

NAME	MD	TVD	NAME	MD	TVD
OJO ALAMO	2739	2732	*POINT LOOKOUT	5868	5852
KIRTLAND	2863	2856	*MANCOS	6356	6338
*FRUITLAND	3279	3271	KICKOFF POINT	6479	6461
*PICTURED CLIFFS	3592	3583	LANDING POINT	7530	7148
LEWIS	3687	3677			
CHACRA	4790	4777			
*CLIFF HOUSE	5633	5617			
MENEFEE	5671	5655	TD	17,045	7,148

* Indicates depth at which anticipated water, oil, gas or other mineral bearing formations are expected to be encountered.

B. MUD LOGGING PROGRAM: Mudlogger on location from KOP to TD.

C. LOGGING PROGRAM: LWD GR from surface casing to TD.

D. NATURAL GAUGES: Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.

II. DRILLING

A. MUD PROGRAM: LSND mud (WBM) will be used to drill the 17-1/2" surface hole as well as the 12-1/4" directional vertical hole. A LSND (WBM) or (OBM) will be used to drill the 8-1/2" curve and lateral portion of the wellbore. Treat for lost circulation as necessary. Obtain 100% returns prior to cementing. Notify Engineering of any mud losses. Mud weights of 8.8-13 ppg will be used as necessary to maintain sufficient overbalance of reservoir pressure.

Above ground steel pits will be used for fluid and cuttings while drilling. In the unlikely event that a tank develops a leak, upon immediate visual discovery, the fluid would be transferred to another tank and contaminated soil would be removed and disposed. Any leaks, spills or other undesirable events will be reported in accordance with BLM NTL 3A. Rig crews will monitor the tanks at all

ROSA UNIT 836H



times.

- B. BOP TESTING:** The BOPE will be tested to **250 psi (Low) for 5 minutes** and **1500 psi (High) for 10 minutes**. Pressure test surface casing to **600 psi for 30 minutes** and intermediate casing to **1500 psi for 30 minutes**. Utilize a BOPE Testing Unit with a recording chart and appropriate test plug for testing. The drum brakes will be inspected and tested each tour. BOP equipment will be tested every 30 days, after any repairs are made to the BOP equipment, and after the BOP equipment is subjected to pressure. Annular preventers will be functionally operated at least once per week. Pipe and blind rams shall be activated each trip or but not more than once a day. The New Mexico Oil & Gas Conservation Commission and the BLM will be notified 24 hours in advance of testing of BOPE. **All tests and inspections will be recorded and logged with time and results.** A full BOP test will be conducted when initially installed for the first well on the pad or if seals subject to test pressure are broken, following related repairs and at a minimum of 30 day intervals. A BOPE Shell Test only will be conducted for subsequent wells on the pad when seals subject to pressure have not been broken or repaired and fall within the 30 day interval of first full test.
- C. GeoHazards:** There are no Geohazards
- D. Maximum Anticipated Pressure:** $7148' \text{ TVD} \times 0.43 = 3074 \text{ psi}$
- E. H2S Concerns:** There is no record of any naturally occurring H2S in any formation in the Rosa Unit. No H2S is anticipated in this formation or this well

III. MATERIALS

A. CASING EQUIPMENT:

CASING TYPE	OHSIZE (IN)	GL DEPTH (MD)	CSG SIZE	WEIGHT	GRADE	CONN
SURFACE	17.5"	320' or greater	13.375"	54.5 LBS	J-55 or equiv	LTC/BTC
INTERMEDIATE	12.25"	6,431'	9.625"	43.5 LBS	N-80 or equiv	LTC/BTC
PRODUCTION	8.5"	17,045'	5.5"	20 LBS	P-110 or equiv	LTC/BTC

NOTE: All casing depths are approximate, based on GL elevation and will be based on drilling conditions +/- 50'. Weights, grades and connections will be based on availability and may vary but will be equivalent or greater.

B. FLOAT EQUIPMENT:

- SURFACE CASING:** 13-3/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (3) joints of Surface Casing.
- INTERMEDIATE CASING:** 9-5/8" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) centralizer at 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. Optional use of DV Tools (2) will be strategically placed above loss circulation zones anticipated in the Mesaverde and Fruitland Coal. Optional use of cancellation plugs for DV tools may be used if losses while cementing are not encountered.
- PRODUCTION CASING:** Run 5-1/2" casing with cement nose guide Float Shoe, 5-1/2" full or pup joints as necessary, Landing Collar, 5-1/2" full or pup joints as necessary, at least (1) one Toe Sleeve (Sliding Sleeve) positioned inside the applicable production area. Centralizer program will be determined by wellbore conditions. Production casing to be pressure tested during completion operations with frac stack installed.

ROSA UNIT 836H



C. CEMENTING:

(Note: Cement type and volumes may be adjusted onsite due to actual conditions and availability)

1. SURFACE: Casing shall be set at ~ 320' and cemented to surface. TOC at Surface.
263 sks of 15.8 ppg Type Neat G, 1.18 cuft/sk yield or equivalent 223 sks of 14.6 ppg Type III with 1.39 cuft/sk yield, 30% excess.
2. INTERMEDIATE: Intermediate casing shall be kept fluid filled while running in to the hole to meet BLM minimum collapse requirements. The intermediate casing will be cemented in 2 or 3 stages using DV/STAGE tools in order to reduce cement losses and maximize cement coverage. Operator proposes optional DV tools above anticipated loss circulation zones in the Mesaverde and in the Fruitland coal. If losses are not observed during the second stage a cancelation plug will be pumped and the remaining cement will be pumped during stage 2. If cement does not circulate to the DV tool(s) or to surface, a CBL will be run to determine TOC.

	Top (ft)	Footage (ft)	Cement (ft3/ft) Annular Capacity	Excess (30%)	Total (ft3)	Total (bbl)	Slurry Yield (ft3/sk)	Sacks Cement	Density (PPG)
Stage 1 Tail	5,968	463	0.31318	1.3	206	37	1.15	179	15.8
Stage 1 Lead	4,840	1,128	0.31318	1.3	459	82	2.30	200	12.3
					665	118		379	
Stage 2 Tail	3,792	1,048	0.31318	1.3	427	76	1.50	284	13.5
Stage 2 Lead	3,329	463	0.31318	1.3	189	34	2.30	82	12.3
					615	110		366	
Stage 3 Tail	2,579	750	0.31318	1.3	305	54	1.99	153	12.8
Stage 3 Lead	320	2,259	0.31318	1.3	920	164	2.53	364	12
Stage 3 Lead	-	320	0.36268	1	116	21	2.53	46	12
					1,341	239		563	
All Stage Totals					2,622	467		1,308	

Calculations based on 30% excess for open hole and cement to surface. Actual excess pumped will be determined by well conditions.

3. PRODUCTION: Production casing will be cemented in 1 stage with 100' of cement overlap above intermediate shoe. A CBL, or alternatively, a Temperature Survey will be used to determine TOC.

	Top (ft)	Footage (ft)	Cement (ft3/ft) Annular Capacity	Excess (15%)	Total (ft3)	Total (bbl)	Slurry Yield (ft3/sk)	Sacks Cement	Density (PPG)
Cased Lead	6,331	100	0.2531	1	25	5	1.56	16	13
Open Hole Lead	6,431	10,614	0.2291	1.15	2,807	500	1.56	1,799	13
					2,832	504		1,816	

Calculations based on 15% excess for open hole and 100' overlap into intermediate casing. Actual volumes will vary.

Cement calculations are used for volume estimation. Well conditions will dictate final cement job design. Actual volumes will be calculated and determined by conditions onsite. All cement slurries will meet or exceed minimum BLM and New Mexico Oil Conservation Division requirements. Slurries used will be the slurries listed above or equivalent slurries depending on service provider selected. Cement yields may change depending on slurries selected. All waiting on cement times shall be a minimum of 8 hours or adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

IV. COMPLETION

A. CBL

CBLs and/or Temperature Surveys will be performed as needed or required to determine cement top if

ROSA UNIT 836H



cement is not circulated.

B. PRESSURE TEST

- C. Pressure test 5-1/2" casing to 1573 psi (0.22 psi/ft * 7,148' TVD) for 30 minutes. Increase pressure to Open Toe sleeves.

D. STIMULATION

Stimulate with sand and water. Isolate stages with flow through or dissolvable frac plugs. Drill out frac plugs as required and flowback lateral.


E. PRODUCTION TUBING

2-7/8", 6.5#, J-55 or L-80, EUE tubing will be run once volumes and pressures dictate. Due to the extremely high initial flow rates and pressures seen in offset wells, tubing will be installed once it is safe to do so, typically 12-18 months after completion.

*NOTE: Although this horizontal well may be drilled past the applicable setbacks, an unorthodox location application is not required because the completed interval in this well, as defined by 19.15.16.7 8(1) NMAC, will be entirely within the applicable setbacks. This approach complies with all applicable rules, including 19.15.16.14 A(3) NMAC, 19.15.16.14 8(2) NMAC, 19.15.16.15 8(2)NMAC, and 19.15.16.15. 8(4) NMAC.




3M 11" B.O.P.E Diagram

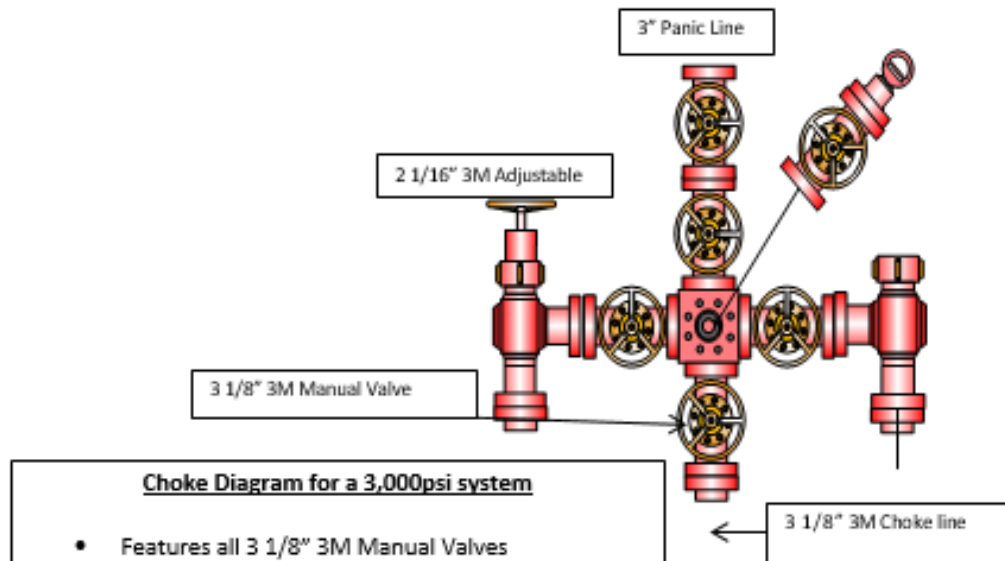

Choke Diagram for a 3,000psi system

- Features all 3 1/8" 3M Manual Valves
- Two 2 1/16" Manual Adjustable Choke Valves
- 3" Panic Line and 2" Vent lines
- (2) 3 1/8" 3M ~~Coflex~~ Hose f/Choke to BOP

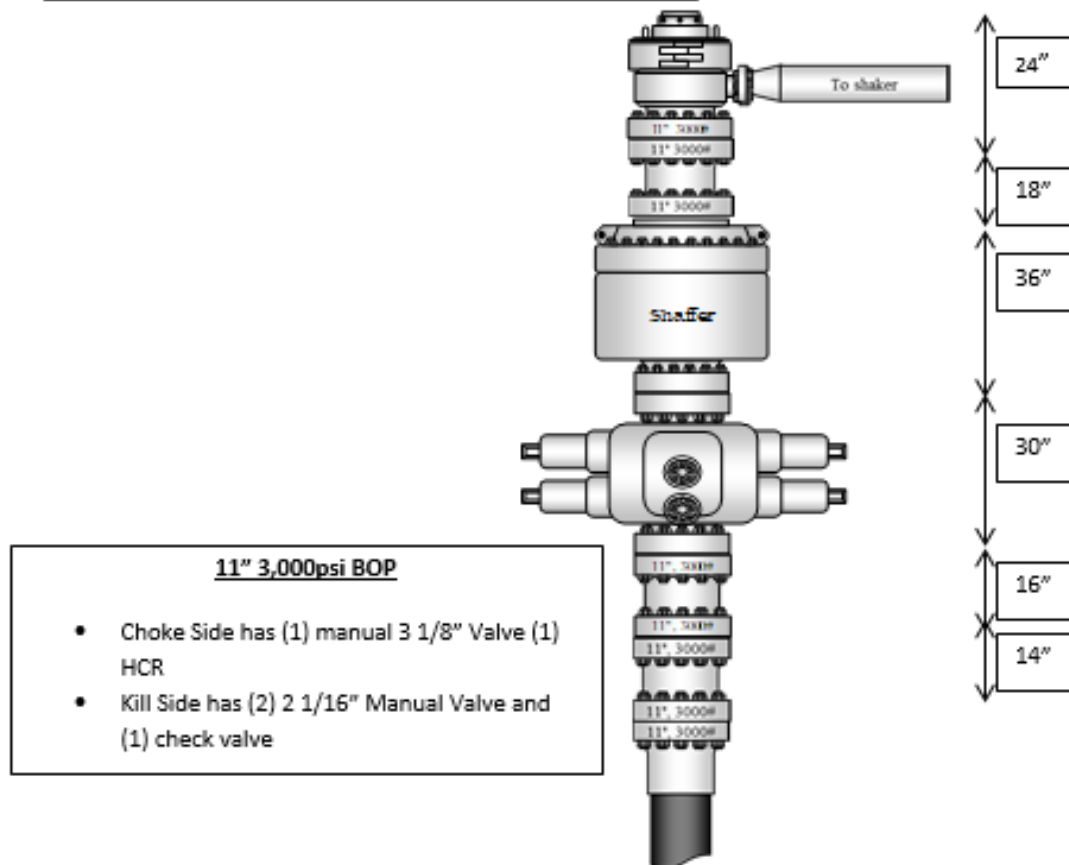

ROSA UNIT 836H

Surface Casing Design - Evacuated/Max SICP (collapse & burst), 100k overpull (tension)

					1.125	1.000		1.400
	Size	Weight	Grade	Conn	Collapse	Burst	70% Burst	Tension (Body)
Surface	13.375	54.5	J-55	BTC	1,130	2,730	1,911	853,000

Collapse

	Casing Depth TVD	MW in	MW out	Pres in	Pres out	SF	
54.5 J-55 BTC	320	0.00	15.80	0	263	4.30	full evacuation with 15.8 ppg m

Burst

54.5 J-55 BTC	320	9.00	0.00	1650	0	1.65	1500 psi casing test
---------------	-----	------	------	------	---	------	----------------------

Tension

54.5 J-55 BTC		Mud Wt	Air Wt	Bouy Wt	BW +100k	SF	
Tension (Body)	320	9.00	17,440	15,044	115,044	7.41	100k over pull
Tension (Conn)	320	9.00	17,440	15,044	115,044	7.90	100k over pull
		BF					BF= 1- (MW)/65.5
		0.8626					

Intermediate Casing Design - Evacuated/Max SICP (collapse & burst), 100k overpull (tension)

					1.125	1.000		1.400
	Size	Weight	Grade	Conn	Collapse	Burst	80% Burst	Tension (Body)
Intermediate	9.625	43.5	N-80 or L-80	LTC	3,810	6,330	5,064	1,005,000
	9.625	43.5	N-80 or L-80	BTC	3,810	6,330	5,064	1,005,000
	9.625	43.5	P-110	BTC	4,420	8,700	6,960	1,381,000

Collapse

Casing Depth TVD	MW in	MW out	Pres in	Pres out	SF	
43.5 N-80 or L-80 L 6,413	0.00	9.50	0	3168	1.20	full evacuation with 9.5 ppg mu
43.5 N-80 or L-80 E 6,413	0.00	9.50	0	3168	1.20	full evacuation with 9.5 ppg mu

Burst

43.5 N-80 or L-80 L 6,413	9.50	0.00	4668	0	1.36	Casing full with 9.5 ppg mud , al
43.5 N-80 or L-80 E 6,413	9.50	0.00	4668	0	1.36	Casing full with 9.5 ppg mud , al

Tension

		Mud Wt	Air Wt	Bouy Wt	BW +100k	SF	
43.5 N-80 or L-80 LTC							
Tension (Body)	6,413	9.50	278,966	238,505	338,505	2.97	100k over pull
Tension (Conn)	6,413	9.50	278,966	238,505	338,505	2.44	100k over pull
		BF					BF= 1- (MW)/65.5
		0.8550					
43.5 N-80 or L-80 BTC							
Tension (Body)	6,413	9.50	278,966	238,505	338,505	2.97	100k over pull
Tension (Conn)	6,413	9.50	278,966	238,505	338,505	3.17	100k over pull
		BF					BF= 1- (MW)/65.5
		0.8550					

Production Casing Design - Evacuated/Max SICP (collapse & burst), 100k overpull (tension)

					1.125	1.000		1.400
	Size	Weight	Grade	Conn	Collapse	Burst	80% Burst	Tension (Body)
Production	5.5	20	P110	LTC	11,080	12,630	10,104	641,000
	5.5	20	P110	BTC	11,080	12,360	9,888	641,000

Collapse							
	Casing Depth TVD	MW in	MW out	Pres in	Pres out	SF	
20 P110 LTC	7,148	0.00	13.30	0	4944	2.24	full evacuation with 13.3 ppg m
20 P110 BTC	7,148	0.00	13.30	0	4944	2.24	full evacuation with 13.3 ppg m

Burst							
20 P110 LTC	7,148	13.30	0.00	11444	0	1.10	6500 psi casing test
20 P110 BTC	7,148	13.30	0.00	11444	0	1.08	6500 psi casing test

Tension							
20 P110 LTC		Mud Wt	Air Wt	Bouy Wt	BW +100k	SF	
Tension (Body)	7,148	13.30	142,960	113,931	213,931	3.00	100k over pull
Tension (Conn)	7,148	13.30	142,960	113,931	213,931	2.56	100k over pull
		BF					BF= 1- (MW)/65.5
		0.7969					
20 P110 BTC		Mud Wt	Air Wt	Bouy Wt	BW +100k	SF	
Tension (Body)	7,148	9.00	142,960	123,317	223,317	2.87	100k over pull
Tension (Conn)	7,148	9.00	142,960	123,317	223,317	2.99	100k over pull
		BF					BF= 1- (MW)/65.5



Logos Operating LLC

Rio Arriba, NM NAD83

Rosa Unit 42

Rosa Unit #836H

OH

Plan #2

Anticollision Report

01 December, 2021





Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Reference	Plan #2
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method	MD Interval 100.00ft
Depth Range:	Unlimited
Results Limited by:	Maximum centre distance of 5,000.00ft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date	12/1/2021		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
0.00	17,044.78	Plan #2 (OH)	MWD+HDGM	OWSG MWD + HDGM	

Summary						
Site Name	Reference Measure	Offset Measure	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation	Warning
Offset Well - Wellbore - Design						
Rosa Unit 42						
Rosa Unit #184C - OH - OH						Out of range
Rosa Unit # 830H - OH - Plan #1	500.00	500.00	14.98	11.40	4.180	CC, ES
Rosa Unit # 830H - OH - Plan #1	7,413.47	7,451.73	96.83	39.31	1.683	SF
Rosa Unit # 831H - OH - Plan #1	500.00	500.00	17.54	13.96	4.893	CC, ES
Rosa Unit # 831H - OH - Plan #1	600.00	599.69	19.81	15.53	4.629	SF
Rosa Unit #832H - OH - Plan #1	500.00	500.00	75.54	71.95	21.071	CC
Rosa Unit #832H - OH - Plan #1	600.00	598.50	75.83	71.55	17.745	ES
Rosa Unit #832H - OH - Plan #1	900.00	889.49	92.12	85.81	14.595	SF
Rosa Unit #834H - OH - Plan #1	500.00	500.00	90.43	86.84	25.226	CC, ES
Rosa Unit #834H - OH - Plan #1	16,600.00	16,631.32	1,356.83	777.84	2.343	SF
Rosa Unit #834H - OH - Plan #2	500.00	500.00	90.43	86.84	25.226	CC, ES
Rosa Unit #834H - OH - Plan #2	17,044.78	17,114.17	1,354.48	747.36	2.231	SF
Rosa Unit #835H - OH - Plan #1	500.00	500.00	89.95	86.36	25.092	CC, ES
Rosa Unit #835H - OH - Plan #1	16,600.00	16,846.12	758.06	216.46	1.400	Level 3, SF

Offset Design	Rosa Unit 42 - Rosa Unit # 830H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program:	0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	34.42	12.36	8.47	14.98	14.98	0.00	N/A		
100.00	100.00	100.00	100.00	0.36	0.36	34.42	12.36	8.47	14.98	14.27	0.72	20.899		
200.00	200.00	200.00	200.00	0.72	0.72	34.42	12.36	8.47	14.98	13.55	1.43	10.450		
300.00	300.00	300.00	300.00	1.08	1.08	34.42	12.36	8.47	14.98	12.83	2.15	6.966		
400.00	400.00	400.00	400.00	1.43	1.43	34.42	12.36	8.47	14.98	12.12	2.87	5.225		
500.00	500.00	500.00	500.00	1.79	1.79	34.42	12.36	8.47	14.98	11.40	3.58	4.180	CC, ES	
600.00	599.98	599.64	599.62	2.14	2.14	130.94	12.14	10.19	16.95	12.66	4.28	3.955		
700.00	699.84	698.56	698.40	2.49	2.48	149.66	11.50	15.29	24.89	19.91	4.98	5.002		
800.00	799.53	796.26	795.73	2.85	2.83	162.17	10.45	23.65	39.72	34.05	5.66	7.011		
900.00	899.22	894.61	893.57	3.21	3.19	168.31	9.20	33.66	57.08	50.72	6.35	8.982		
1,000.00	998.91	992.97	991.40	3.57	3.55	171.57	7.94	43.66	74.78	67.73	7.05	10.607		
1,100.00	1,098.60	1,091.32	1,089.24	3.94	3.91	173.58	6.68	53.66	92.62	84.87	7.75	11.953		
1,200.00	1,198.28	1,189.67	1,187.07	4.31	4.28	174.94	5.42	63.67	110.54	102.09	8.45	13.080		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit # 830H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
1,300.00	1,297.97	1,288.03	1,284.91	4.68	4.65	175.92	4.17	73.67	128.50	119.35	9.16	14.036		
1,400.00	1,397.66	1,386.38	1,382.74	5.05	5.02	176.65	2.91	83.67	146.49	136.63	9.86	14.855		
1,500.00	1,497.34	1,484.73	1,480.58	5.42	5.40	177.23	1.65	93.67	164.50	153.93	10.57	15.564		
1,600.00	1,597.03	1,583.09	1,578.41	5.79	5.77	177.70	0.40	103.68	182.52	171.24	11.28	16.183		
1,700.00	1,696.72	1,681.44	1,676.25	6.16	6.15	178.08	-0.86	113.68	200.55	188.56	11.99	16.728		
1,800.00	1,796.40	1,779.79	1,774.08	6.53	6.52	178.39	-2.12	123.68	218.59	205.89	12.70	17.212		
1,900.00	1,896.09	1,878.14	1,871.92	6.90	6.90	178.66	-3.37	133.68	236.63	223.22	13.41	17.644		
2,000.00	1,995.78	1,976.50	1,969.75	7.28	7.27	178.89	-4.63	143.69	254.68	240.55	14.12	18.032		
2,100.00	2,095.47	2,074.85	2,067.59	7.65	7.65	179.10	-5.89	153.69	272.73	257.89	14.84	18.383		
2,200.00	2,195.15	2,173.20	2,165.42	8.03	8.03	179.27	-7.14	163.69	290.78	275.23	15.55	18.700		
2,300.00	2,294.84	2,271.56	2,263.26	8.40	8.41	179.43	-8.40	173.69	308.83	292.57	16.26	18.990		
2,400.00	2,394.53	2,369.91	2,361.09	8.77	8.78	179.56	-9.66	183.70	326.89	309.92	16.98	19.255		
2,500.00	2,494.21	2,468.26	2,458.93	9.15	9.16	179.69	-10.92	193.70	344.95	327.26	17.69	19.498		
2,600.00	2,593.90	2,566.62	2,556.76	9.52	9.54	179.80	-12.17	203.70	363.01	344.61	18.41	19.723		
2,700.00	2,693.59	2,664.97	2,654.60	9.90	9.92	179.90	-13.43	213.70	381.07	361.95	19.12	19.930		
2,800.00	2,793.28	2,763.32	2,752.44	10.27	10.30	179.99	-14.69	223.71	399.14	379.30	19.84	20.122		
2,900.00	2,892.96	2,861.68	2,850.27	10.65	10.68	-179.93	-15.94	233.71	417.20	396.65	20.55	20.301		
3,000.00	2,992.65	2,960.03	2,948.11	11.02	11.06	-179.85	-17.20	243.71	435.27	414.00	21.27	20.467		
3,100.00	3,092.34	3,058.38	3,045.94	11.40	11.44	-179.78	-18.46	253.71	453.33	431.35	21.98	20.623		
3,200.00	3,192.02	3,156.74	3,143.78	11.77	11.81	-179.71	-19.71	263.72	471.40	448.70	22.70	20.769		
3,300.00	3,291.71	3,255.09	3,241.61	12.14	12.19	-179.65	-20.97	273.72	489.46	466.05	23.41	20.905		
3,400.00	3,391.40	3,353.44	3,339.45	12.52	12.57	-179.60	-22.23	283.72	507.53	483.40	24.13	21.034		
3,500.00	3,491.09	3,451.80	3,437.28	12.90	12.95	-179.54	-23.48	293.72	525.60	500.75	24.85	21.155		
3,600.00	3,590.77	3,550.15	3,535.12	13.27	13.33	-179.50	-24.74	303.73	543.67	518.10	25.56	21.269		
3,700.00	3,690.46	3,648.50	3,632.95	13.65	13.71	-179.45	-26.00	313.73	561.73	535.46	26.28	21.376		
3,800.00	3,790.15	3,746.86	3,730.79	14.02	14.09	-179.41	-27.25	323.73	579.80	552.81	26.99	21.478		
3,900.00	3,889.83	3,845.21	3,828.62	14.40	14.47	-179.37	-28.51	333.73	597.87	570.16	27.71	21.575		
4,000.00	3,989.52	3,943.56	3,926.46	14.77	14.85	-179.33	-29.77	343.74	615.94	587.51	28.43	21.667		
4,100.00	4,089.21	4,041.92	4,024.29	15.15	15.23	-179.29	-31.03	353.74	634.01	604.87	29.14	21.754		
4,200.00	4,188.90	4,140.27	4,122.13	15.52	15.61	-179.26	-32.28	363.74	652.08	622.22	29.86	21.837		
4,300.00	4,288.58	4,238.62	4,219.96	15.90	15.99	-179.23	-33.54	373.75	670.15	639.57	30.58	21.916		
4,400.00	4,388.27	4,336.97	4,317.80	16.27	16.37	-179.20	-34.80	383.75	688.22	656.92	31.30	21.991		
4,500.00	4,487.96	4,435.33	4,415.63	16.65	16.75	-179.17	-36.05	393.75	706.29	674.28	32.01	22.063		
4,600.00	4,587.64	4,533.68	4,513.47	17.02	17.13	-179.14	-37.31	403.75	724.36	691.63	32.73	22.132		
4,700.00	4,687.33	4,632.03	4,611.30	17.40	17.51	-179.12	-38.57	413.76	742.43	708.98	33.45	22.197		
4,800.00	4,787.02	4,730.39	4,709.14	17.77	17.89	-179.09	-39.82	423.76	760.50	726.34	34.16	22.260		
4,900.00	4,886.70	4,828.74	4,806.97	18.15	18.27	-179.07	-41.08	433.76	778.57	743.69	34.88	22.321		
5,000.00	4,986.39	4,927.09	4,904.81	18.53	18.65	-179.05	-42.34	443.76	796.64	761.04	35.60	22.378		
5,100.00	5,086.08	5,025.45	5,002.64	18.90	19.03	-179.02	-43.59	453.77	814.71	778.40	36.32	22.434		
5,200.00	5,185.77	5,123.80	5,100.48	19.28	19.41	-179.00	-44.85	463.77	832.78	795.75	37.03	22.487		
5,300.00	5,285.45	5,222.15	5,198.31	19.65	19.79	-178.98	-46.11	473.77	850.86	813.10	37.75	22.538		
5,400.00	5,385.14	5,320.51	5,296.15	20.03	20.18	-178.96	-47.36	483.77	868.93	830.46	38.47	22.588		
5,500.00	5,484.83	5,418.86	5,393.99	20.40	20.56	-178.95	-48.62	493.78	887.00	847.81	39.19	22.635		
5,600.00	5,584.51	5,517.21	5,491.82	20.78	20.94	-178.93	-49.88	503.78	905.07	865.17	39.90	22.681		
5,700.00	5,684.20	5,615.57	5,589.66	21.15	21.32	-178.91	-51.14	513.78	923.14	882.52	40.62	22.725		
5,800.00	5,783.89	5,713.92	5,687.49	21.53	21.70	-178.90	-52.39	523.78	941.21	899.87	41.34	22.767		
5,900.00	5,883.58	5,812.27	5,785.33	21.91	22.08	-178.88	-53.65	533.79	959.28	917.23	42.06	22.809		
6,000.00	5,983.26	5,910.63	5,883.16	22.28	22.46	-178.87	-54.91	543.79	977.36	934.58	42.78	22.848		
6,100.00	6,082.95	6,008.98	5,981.00	22.66	22.84	-178.85	-56.16	553.79	995.43	951.93	43.49	22.886		
6,200.00	6,182.64	7,947.48	7,146.85	23.03	37.67	-133.52	-58.58	-439.64	968.19	944.69	23.50	41.198		
6,300.00	6,282.32	7,955.58	7,146.87	23.41	37.84	-130.47	-58.49	-447.74	869.02	845.13	23.88	36.387		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit # 830H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
6,400.00	6,382.01	7,963.68	7,146.88	23.78	38.02	-127.14	-58.40	-455.84	769.98	745.65	24.33	31.653		
6,500.00	6,481.72	7,971.44	7,146.90	24.16	38.18	-115.05	-58.31	-463.61	671.10	646.23	24.87	26.989		
6,600.00	6,581.57	7,968.47	7,146.89	24.47	38.12	126.46	-58.34	-460.63	572.36	546.85	25.51	22.439		
6,700.00	6,679.68	7,949.91	7,146.86	24.74	37.72	144.21	-58.55	-442.08	475.78	449.46	26.32	18.074		
6,800.00	6,773.66	7,916.22	7,146.79	24.99	37.01	149.57	-58.93	-408.39	384.04	356.52	27.52	13.957		
6,900.00	6,861.17	7,868.24	7,146.69	25.24	36.02	149.80	-59.47	-360.41	299.89	270.42	29.47	10.175		
7,000.00	6,940.07	7,807.15	7,146.56	25.52	34.80	146.44	-60.16	-299.32	226.34	193.47	32.87	6.887		
7,100.00	7,008.42	7,734.44	7,146.41	25.90	33.45	139.14	-60.98	-226.62	166.79	128.16	38.63	4.317		
7,200.00	7,064.53	7,651.91	7,146.24	26.45	32.03	127.04	-61.91	-144.09	125.09	78.25	46.83	2.671		
7,300.00	7,107.02	7,561.59	7,146.05	27.23	30.60	111.06	-62.93	-53.78	103.39	49.14	54.25	1.906		
7,400.00	7,134.84	7,464.63	7,141.55	28.27	29.28	93.89	-63.97	43.00	96.92	39.51	57.42	1.688		
7,413.47	7,137.42	7,451.73	7,139.90	28.45	29.11	91.49	-64.09	55.79	96.83	39.31	57.53	1.683 SF		
7,500.00	7,147.31	7,370.77	7,123.65	29.56	28.20	76.54	-64.80	135.04	100.45	44.08	56.37	1.782		
7,600.00	7,148.00	7,282.10	7,094.48	31.06	27.39	61.31	-65.40	218.70	113.89	61.50	52.39	2.174		
7,700.00	7,148.00	7,200.00	7,057.36	32.76	26.82	47.24	-65.79	291.87	142.61	95.62	46.99	3.035		
7,800.00	7,148.00	7,133.36	7,020.51	34.65	26.48	37.57	-65.99	347.35	186.65	142.66	43.99	4.243		
7,900.00	7,148.00	7,073.66	6,982.72	36.69	26.23	30.68	-66.07	393.55	242.86	199.92	42.94	5.656		
8,000.00	7,148.00	7,022.55	6,947.06	38.86	26.06	25.99	-66.06	430.14	308.02	264.92	43.10	7.147		
8,100.00	7,148.00	6,978.84	6,914.31	41.14	25.94	22.72	-66.01	459.08	379.80	336.07	43.73	8.684		
8,200.00	7,148.00	6,950.00	6,891.65	43.50	25.86	20.87	-65.94	476.91	456.71	411.85	44.86	10.181		
8,300.00	7,148.00	6,900.00	6,850.54	45.95	25.75	18.15	-65.78	505.34	537.31	492.43	44.88	11.973		
8,400.00	7,148.00	6,881.13	6,834.46	48.46	25.71	17.26	-65.71	515.21	620.76	574.91	45.85	13.539		
8,500.00	7,148.00	6,850.00	6,807.32	51.03	25.64	15.93	-65.56	530.45	706.80	660.55	46.24	15.284		
8,600.00	7,148.00	6,835.43	6,794.36	53.65	25.61	15.36	-65.49	537.12	794.61	747.72	46.89	16.947		
8,700.00	7,148.00	6,816.60	6,777.41	56.30	25.57	14.67	-65.38	545.30	884.05	836.75	47.30	18.692		
8,800.00	7,148.00	6,800.00	6,762.26	59.00	25.53	14.10	-65.28	552.09	974.78	927.13	47.65	20.458		
8,900.00	7,148.00	6,800.00	6,762.26	61.72	25.53	14.10	-65.28	552.09	1,066.85	1,018.72	48.14	22.163		
9,000.00	7,148.00	6,771.66	6,736.01	64.47	25.47	13.21	-65.09	562.77	1,159.27	1,111.06	48.21	24.047		
9,100.00	7,148.00	6,750.00	6,715.64	67.25	25.42	12.58	-64.94	570.14	1,252.84	1,204.50	48.34	25.918		
9,200.00	7,148.00	6,750.00	6,715.64	70.04	25.42	12.58	-64.94	570.14	1,346.84	1,298.20	48.64	27.688		
9,300.00	7,148.00	6,750.00	6,715.64	72.86	25.42	12.58	-64.94	570.14	1,441.65	1,392.76	48.89	29.486		
9,400.00	7,148.00	6,729.83	6,696.46	75.69	25.37	12.04	-64.78	576.37	1,536.67	1,487.71	48.96	31.385		
9,500.00	7,148.00	6,721.57	6,688.55	78.53	25.35	11.83	-64.72	578.75	1,632.25	1,583.15	49.10	33.243		
9,600.00	7,148.00	6,700.00	6,667.75	81.39	25.30	11.31	-64.54	584.47	1,728.42	1,679.27	49.14	35.170		
9,700.00	7,148.00	6,700.00	6,667.75	84.26	25.30	11.31	-64.54	584.47	1,824.54	1,775.24	49.30	37.007		
9,800.00	7,148.00	6,700.00	6,667.75	87.14	25.30	11.31	-64.54	584.47	1,921.06	1,871.61	49.44	38.855		
9,900.00	7,148.00	6,700.00	6,667.75	90.03	25.30	11.31	-64.54	584.47	2,017.91	1,968.35	49.56	40.713		
10,000.00	7,148.00	6,700.00	6,667.75	92.93	25.30	11.31	-64.54	584.47	2,115.06	2,065.39	49.67	42.579		
10,100.00	7,148.00	6,700.00	6,667.75	95.84	25.30	11.31	-64.54	584.47	2,212.46	2,162.69	49.77	44.451		
10,200.00	7,148.00	6,678.91	6,647.25	98.75	25.25	10.84	-64.35	589.37	2,309.64	2,259.86	49.79	46.390		
10,300.00	7,148.00	6,674.38	6,642.82	101.67	25.24	10.74	-64.31	590.34	2,407.26	2,357.40	49.86	48.279		
10,400.00	7,148.00	6,670.13	6,638.66	104.60	25.23	10.65	-64.28	591.22	2,505.02	2,455.09	49.93	50.170		
10,500.00	7,148.00	6,650.00	6,618.89	107.53	25.18	10.24	-64.09	594.99	2,603.18	2,553.23	49.95	52.116		
10,600.00	7,148.00	6,650.00	6,618.89	110.47	25.18	10.24	-64.09	594.99	2,701.10	2,651.08	50.03	53.993		
10,700.00	7,148.00	6,650.00	6,618.89	113.41	25.18	10.24	-64.09	594.99	2,799.17	2,749.07	50.10	55.872		
10,800.00	7,148.00	6,650.00	6,618.89	116.36	25.18	10.24	-64.09	594.99	2,897.38	2,847.21	50.17	57.751		
10,900.00	7,148.00	6,650.00	6,618.89	119.31	25.18	10.24	-64.09	594.99	2,995.70	2,945.46	50.24	59.632		
11,000.00	7,148.00	6,650.00	6,618.89	122.26	25.18	10.24	-64.09	594.99	3,094.12	3,043.82	50.30	61.513		
11,100.00	7,148.00	6,650.00	6,618.89	125.22	25.18	10.24	-64.09	594.99	3,192.65	3,142.29	50.36	63.393		
11,200.00	7,148.00	6,650.00	6,618.89	128.18	25.18	10.24	-64.09	594.99	3,291.26	3,240.84	50.42	65.273		
11,300.00	7,148.00	6,650.00	6,618.89	131.14	25.18	10.24	-64.09	594.99	3,389.96	3,339.48	50.48	67.152		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit # 830H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Minimum Separation (ft)	Separation Factor	Warning
							+N/-S (ft)	+E/-W (ft)					
11,400.00	7,148.00	6,650.00	6,618.89	134.11	25.18	10.24	-64.09	594.99	3,488.73	3,438.19	50.54	69.030	
11,500.00	7,148.00	6,650.00	6,618.89	137.08	25.18	10.24	-64.09	594.99	3,587.57	3,536.97	50.60	70.906	
11,600.00	7,148.00	6,650.00	6,618.89	140.05	25.18	10.24	-64.09	594.99	3,686.47	3,635.82	50.65	72.780	
11,700.00	7,148.00	6,650.00	6,618.89	143.03	25.18	10.24	-64.09	594.99	3,785.43	3,734.72	50.71	74.652	
11,800.00	7,148.00	6,650.00	6,618.89	146.00	25.18	10.24	-64.09	594.99	3,884.44	3,833.68	50.76	76.522	
11,900.00	7,148.00	6,628.09	6,597.25	148.98	25.12	9.83	-63.87	598.39	3,983.07	3,932.29	50.78	78.438	
12,000.00	7,148.00	6,626.23	6,595.40	151.96	25.12	9.79	-63.85	598.65	4,082.10	4,031.26	50.83	80.305	
12,100.00	7,148.00	6,624.44	6,593.63	154.94	25.11	9.76	-63.84	598.89	4,181.17	4,130.28	50.88	82.169	
12,200.00	7,148.00	6,622.73	6,591.93	157.93	25.11	9.73	-63.82	599.11	4,280.28	4,229.34	50.94	84.030	
12,300.00	7,148.00	6,600.00	6,569.35	160.91	25.05	9.33	-63.58	601.66	4,379.82	4,328.86	50.96	85.948	
12,400.00	7,148.00	6,600.00	6,569.35	163.90	25.05	9.33	-63.58	601.66	4,478.94	4,427.93	51.02	87.796	
12,500.00	7,148.00	6,600.00	6,569.35	166.89	25.05	9.33	-63.58	601.66	4,578.10	4,527.03	51.07	89.641	
12,600.00	7,148.00	6,600.00	6,569.35	169.88	25.05	9.33	-63.58	601.66	4,677.29	4,626.17	51.13	91.482	
12,700.00	7,148.00	6,600.00	6,569.35	172.87	25.05	9.33	-63.58	601.66	4,776.52	4,725.34	51.18	93.320	
12,800.00	7,148.00	6,600.00	6,569.35	175.86	25.05	9.33	-63.58	601.66	4,875.78	4,824.54	51.24	95.153	
12,900.00	7,148.00	6,600.00	6,569.35	178.86	25.05	9.33	-63.58	601.66	4,975.07	4,923.77	51.30	96.983	



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit # 831H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:						Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
0.00	0.00	0.00	0.00	0.00	0.00	65.33	7.32	15.94	17.54	17.54	0.00	N/A		
100.00	100.00	100.00	100.00	0.36	0.36	65.33	7.32	15.94	17.54	16.82	0.72	24.466		
200.00	200.00	200.00	200.00	0.72	0.72	65.33	7.32	15.94	17.54	16.11	1.43	12.233		
300.00	300.00	300.00	300.00	1.08	1.08	65.33	7.32	15.94	17.54	15.39	2.15	8.155		
400.00	400.00	400.00	400.00	1.43	1.43	65.33	7.32	15.94	17.54	14.67	2.87	6.116		
500.00	500.00	500.00	500.00	1.79	1.79	65.33	7.32	15.94	17.54	13.96	3.58	4.893 CC, ES		
600.00	599.98	599.69	599.67	2.14	2.14	158.70	6.07	17.15	19.81	15.53	4.28	4.629 SF		
700.00	699.84	698.75	698.59	2.49	2.47	172.24	2.37	20.73	27.79	22.83	4.96	5.599		
800.00	799.53	796.73	796.20	2.85	2.81	-177.28	-3.71	26.62	41.74	36.09	5.65	7.389		
900.00	899.22	893.60	892.36	3.21	3.16	-170.34	-12.08	34.71	59.31	52.99	6.33	9.376		
1,000.00	998.91	991.51	989.35	3.57	3.52	-165.93	-21.74	44.07	78.85	71.83	7.02	11.234		
1,100.00	1,098.60	1,089.45	1,086.35	3.94	3.90	-163.27	-31.41	53.43	98.66	90.94	7.72	12.782		
1,200.00	1,198.28	1,187.39	1,183.36	4.31	4.27	-161.50	-41.08	62.79	118.60	110.18	8.42	14.084		
1,300.00	1,297.97	1,285.32	1,280.37	4.68	4.66	-160.25	-50.75	72.15	138.62	129.49	9.13	15.184		
1,400.00	1,397.66	1,383.26	1,377.38	5.05	5.04	-159.31	-60.42	81.50	158.69	148.85	9.84	16.126		
1,500.00	1,497.34	1,481.20	1,474.39	5.42	5.43	-158.58	-70.09	90.86	178.79	168.23	10.55	16.941		
1,600.00	1,597.03	1,579.13	1,571.39	5.79	5.82	-158.00	-79.76	100.22	198.91	187.64	11.27	17.652		
1,700.00	1,696.72	1,677.07	1,668.40	6.16	6.21	-157.52	-89.43	109.58	219.05	207.06	11.99	18.277		
1,800.00	1,796.40	1,775.01	1,765.41	6.53	6.60	-157.13	-99.10	118.94	239.20	226.50	12.70	18.830		
1,900.00	1,896.09	1,872.94	1,862.42	6.90	7.00	-156.80	-108.77	128.30	259.36	245.94	13.42	19.323		
2,000.00	1,995.78	1,970.88	1,959.42	7.28	7.39	-156.51	-118.43	137.65	279.52	265.38	14.14	19.766		
2,100.00	2,095.47	2,068.81	2,056.43	7.65	7.79	-156.26	-128.10	147.01	299.70	284.83	14.86	20.164		
2,200.00	2,195.15	2,166.75	2,153.44	8.03	8.19	-156.05	-137.77	156.37	319.87	304.29	15.58	20.526		
2,300.00	2,294.84	2,264.69	2,250.45	8.40	8.58	-155.86	-147.44	165.73	340.05	323.75	16.31	20.855		
2,400.00	2,394.53	2,362.62	2,347.46	8.77	8.98	-155.69	-157.11	175.09	360.24	343.21	17.03	21.155		
2,500.00	2,494.21	2,460.56	2,444.46	9.15	9.38	-155.54	-166.78	184.45	380.43	362.67	17.75	21.431		
2,600.00	2,593.90	2,558.50	2,541.47	9.52	9.78	-155.40	-176.45	193.80	400.61	382.14	18.47	21.684		
2,700.00	2,693.59	2,656.43	2,638.48	9.90	10.18	-155.28	-186.12	203.16	420.81	401.61	19.20	21.919		
2,800.00	2,793.28	2,754.37	2,735.49	10.27	10.58	-155.17	-195.79	212.52	441.00	421.08	19.92	22.136		
2,900.00	2,892.96	2,852.31	2,832.49	10.65	10.98	-155.07	-205.46	221.88	461.19	440.55	20.65	22.337		
3,000.00	2,992.65	2,950.24	2,929.50	11.02	11.38	-154.97	-215.13	231.24	481.39	460.02	21.37	22.525		
3,100.00	3,092.34	3,048.18	3,026.51	11.40	11.78	-154.89	-224.79	240.60	501.58	479.49	22.10	22.700		
3,200.00	3,192.02	3,146.12	3,123.52	11.77	12.18	-154.81	-234.46	249.95	521.78	498.96	22.82	22.864		
3,300.00	3,291.71	3,244.05	3,220.53	12.14	12.58	-154.74	-244.13	259.31	541.98	518.43	23.55	23.017		
3,400.00	3,391.40	3,341.99	3,317.53	12.52	12.98	-154.67	-253.80	268.67	562.18	537.91	24.27	23.162		
3,500.00	3,491.09	3,439.93	3,414.54	12.90	13.38	-154.60	-263.47	278.03	582.38	557.38	25.00	23.297		
3,600.00	3,590.77	3,537.86	3,511.55	13.27	13.78	-154.55	-273.14	287.39	602.58	576.86	25.72	23.425		
3,700.00	3,690.46	3,635.80	3,608.56	13.65	14.18	-154.49	-282.81	296.75	622.78	596.33	26.45	23.546		
3,800.00	3,790.15	3,733.74	3,705.57	14.02	14.59	-154.44	-292.48	306.10	642.98	615.81	27.18	23.660		
3,900.00	3,889.83	3,831.67	3,802.57	14.40	14.99	-154.39	-302.15	315.46	663.18	635.28	27.90	23.768		
4,000.00	3,989.52	3,929.61	3,899.58	14.77	15.39	-154.34	-311.82	324.82	683.39	654.76	28.63	23.871		
4,100.00	4,089.21	4,027.55	3,996.59	15.15	15.79	-154.30	-321.48	334.18	703.59	674.24	29.35	23.968		
4,200.00	4,188.90	4,125.48	4,093.60	15.52	16.19	-154.26	-331.15	343.54	723.79	693.71	30.08	24.061		
4,300.00	4,288.58	4,223.42	4,190.60	15.90	16.59	-154.22	-340.82	352.90	744.00	713.19	30.81	24.149		
4,400.00	4,388.27	4,321.36	4,287.61	16.27	17.00	-154.19	-350.49	362.25	764.20	732.67	31.53	24.233		
4,500.00	4,487.96	4,419.29	4,384.62	16.65	17.40	-154.15	-360.16	371.61	784.41	752.14	32.26	24.314		
4,600.00	4,587.64	4,517.23	4,481.63	17.02	17.80	-154.12	-369.83	380.97	804.61	771.62	32.99	24.390		
4,700.00	4,687.33	4,615.17	4,578.64	17.40	18.20	-154.09	-379.50	390.33	824.81	791.10	33.72	24.463		
4,800.00	4,787.02	4,713.10	4,675.64	17.77	18.60	-154.06	-389.17	399.69	845.02	810.58	34.44	24.534		
4,900.00	4,886.70	4,811.04	4,772.65	18.15	19.01	-154.03	-398.84	409.05	865.22	830.05	35.17	24.601		
5,000.00	4,986.39	4,908.98	4,869.66	18.53	19.41	-154.00	-408.51	418.40	885.43	849.53	35.90	24.665		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit # 831H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM									Rule Assigned:				Offset Well Error:	0.00 ft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance				Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
5,100.00	5,086.08	5,006.91	4,966.67	18.90	19.81	-153.98	-418.17	427.76	905.64	869.01	36.63	24.727		
5,200.00	5,185.77	5,104.85	5,063.67	19.28	20.21	-153.95	-427.84	437.12	925.84	888.49	37.35	24.786		
5,300.00	5,285.45	5,202.79	5,160.68	19.65	20.62	-153.93	-437.51	446.48	946.05	907.97	38.08	24.843		
5,400.00	5,385.14	5,300.72	5,257.69	20.03	21.02	-153.91	-447.18	455.84	966.25	927.44	38.81	24.898		
5,500.00	5,484.83	5,398.66	5,354.70	20.40	21.42	-153.88	-456.85	465.20	986.46	946.92	39.54	24.951		
5,600.00	5,584.51	5,496.60	5,451.71	20.78	21.82	-153.86	-466.52	474.55	1,006.67	966.40	40.26	25.001		
5,700.00	5,684.20	5,594.53	5,548.71	21.15	22.23	-153.84	-476.19	483.91	1,026.87	985.88	40.99	25.050		
5,800.00	5,783.89	5,692.47	5,645.72	21.53	22.63	-153.82	-485.86	493.27	1,047.08	1,005.36	41.72	25.098		
5,900.00	5,883.58	5,790.41	5,742.73	21.91	23.03	-153.81	-495.53	502.63	1,067.28	1,024.84	42.45	25.143		
6,000.00	5,983.26	5,888.34	5,839.74	22.28	23.43	-153.79	-505.20	511.99	1,087.49	1,044.31	43.18	25.187		
6,100.00	6,082.95	5,986.28	5,936.74	22.66	23.84	-153.77	-514.86	521.35	1,107.70	1,063.79	43.90	25.229		
6,200.00	6,182.64	6,084.22	6,033.75	23.03	24.24	-153.75	-524.53	530.70	1,127.90	1,083.27	44.63	25.270		
6,300.00	6,282.32	6,182.15	6,130.76	23.41	24.64	-153.74	-534.20	540.06	1,148.11	1,102.75	45.36	25.310		
6,400.00	6,382.01	6,280.09	6,227.77	23.78	25.04	-153.72	-543.87	549.42	1,168.32	1,122.23	46.09	25.348		
6,500.00	6,481.72	6,279.55	7,430.64	24.16	38.78	-100.17	-666.96	-460.48	1,177.74	1,137.10	40.63	28.986		
6,600.00	6,581.57	8,276.51	7,430.64	24.47	38.71	99.78	-666.95	-457.44	1,099.19	1,056.27	42.91	25.614		
6,700.00	6,679.68	8,257.88	7,430.61	24.74	38.33	106.45	-666.89	-438.82	1,025.54	980.37	45.17	22.705		
6,800.00	6,773.66	8,224.14	7,430.56	24.99	37.63	111.37	-666.79	-405.07	959.05	911.76	47.29	20.280		
6,900.00	6,861.17	8,176.10	7,430.49	25.24	36.68	114.16	-666.65	-357.03	901.46	852.29	49.17	18.333		
7,000.00	6,940.07	8,114.95	7,430.39	25.52	35.50	115.26	-666.47	-295.88	853.83	803.12	50.71	16.838		
7,100.00	7,008.42	8,042.19	7,430.28	25.90	34.20	115.17	-666.25	-223.13	816.41	764.52	51.89	15.734		
7,200.00	7,064.53	7,959.62	7,430.16	26.45	32.84	114.37	-666.00	-140.56	788.68	735.96	52.73	14.958		
7,300.00	7,107.02	7,869.28	7,430.02	27.23	31.50	113.33	-665.73	-50.21	769.61	716.28	53.33	14.430		
7,400.00	7,134.84	7,672.53	7,404.40	28.27	29.44	109.30	-662.62	144.07	752.57	699.30	53.27	14.127		
7,500.00	7,147.31	7,497.54	7,333.21	29.56	28.71	104.53	-655.05	303.14	730.24	675.49	54.75	13.338		
7,600.00	7,148.00	7,362.42	7,250.26	31.06	28.48	98.57	-646.46	409.14	706.45	649.62	56.83	12.432		
7,700.00	7,148.00	7,266.20	7,178.54	32.76	28.34	92.61	-639.11	472.71	684.45	625.40	59.05	11.591		
7,800.00	7,148.00	7,197.38	7,121.79	34.65	28.23	87.74	-633.33	511.15	669.27	608.00	61.27	10.923		
7,893.31	7,148.00	7,149.76	7,080.25	36.55	28.15	84.15	-629.12	534.04	664.24	601.00	63.24	10.503		
7,900.00	7,148.00	7,146.81	7,077.62	36.69	28.14	83.92	-628.85	535.36	664.26	600.89	63.37	10.482		
8,000.00	7,148.00	7,108.51	7,042.99	38.86	28.07	80.92	-625.34	551.30	671.29	606.09	65.20	10.296		
8,100.00	7,148.00	7,078.71	7,015.41	41.14	28.00	78.54	-622.56	562.23	690.91	624.28	66.63	10.370		
8,200.00	7,148.00	7,050.00	6,988.39	43.50	27.94	76.23	-619.83	571.54	722.69	655.16	67.53	10.702		
8,300.00	7,148.00	7,035.63	6,974.71	45.95	27.91	75.07	-618.45	575.73	765.37	697.23	68.14	11.233		
8,400.00	7,148.00	7,019.63	6,959.37	48.46	27.87	73.78	-616.91	580.03	817.53	749.20	68.33	11.965		
8,500.00	7,148.00	7,000.00	6,940.43	51.03	27.82	72.20	-615.00	584.78	877.62	809.44	68.18	12.872		
8,600.00	7,148.00	7,000.00	6,940.43	53.65	27.82	72.20	-615.00	584.78	944.15	876.04	68.11	13.863		
8,700.00	7,148.00	6,984.83	6,925.69	56.30	27.78	70.98	-613.52	588.05	1,015.93	948.22	67.71	15.004		
8,800.00	7,148.00	6,976.24	6,917.31	59.00	27.76	70.30	-612.67	589.74	1,092.01	1,024.67	67.33	16.218		
8,900.00	7,148.00	6,968.70	6,909.93	61.72	27.74	69.70	-611.93	591.13	1,171.56	1,104.62	66.94	17.502		
9,000.00	7,148.00	6,950.00	6,891.58	64.47	27.69	68.22	-610.09	594.20	1,254.09	1,187.68	66.41	18.883		
9,100.00	7,148.00	6,950.00	6,891.58	67.25	27.69	68.22	-610.09	594.20	1,338.68	1,272.58	66.10	20.253		
9,200.00	7,148.00	6,950.00	6,891.58	70.04	27.69	68.22	-610.09	594.20	1,425.26	1,359.47	65.79	21.664		
9,300.00	7,148.00	6,950.00	6,891.58	72.86	27.69	68.22	-610.09	594.20	1,513.50	1,448.01	65.49	23.111		
9,400.00	7,148.00	6,950.00	6,891.58	75.69	27.69	68.22	-610.09	594.20	1,603.12	1,537.92	65.21	24.586		
9,500.00	7,148.00	6,950.00	6,891.58	78.53	27.69	68.22	-610.09	594.20	1,693.91	1,628.97	64.94	26.085		
9,600.00	7,148.00	6,950.00	6,891.58	81.39	27.69	68.22	-610.09	594.20	1,785.68	1,720.99	64.69	27.605		
9,700.00	7,148.00	6,930.74	6,872.59	84.26	27.63	66.71	-608.19	596.80	1,877.91	1,813.60	64.31	29.200		
9,800.00	7,148.00	6,927.69	6,869.58	87.14	27.63	66.47	-607.88	597.15	1,971.12	1,907.04	64.08	30.761		
9,900.00	7,148.00	6,924.88	6,866.80	90.03	27.62	66.25	-607.60	597.47	2,064.95	2,001.09	63.86	32.334		
10,000.00	7,148.00	6,922.27	6,864.22	92.93	27.61	66.05	-607.35	597.76	2,159.32	2,095.65	63.67	33.917		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design													Rosa Unit 42 - Rosa Unit # 831H - OH - Plan #1		Offset Site Error:		0.00 ft	
Survey Program:				0-MWD+HDGM				Rule Assigned:				Offset Well Error:				0.00 ft		
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Minimum		Separation		Warning				
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor						
10,100.00	7,148.00	6,919.84	6,861.82	95.84	27.60	65.86	-607.10	598.01	2,254.16	2,190.67	63.48	35.508						
10,200.00	7,148.00	6,900.00	6,842.15	98.75	27.54	64.34	-605.13	599.74	2,349.72	2,286.52	63.20	37.181						
10,300.00	7,148.00	6,900.00	6,842.15	101.67	27.54	64.34	-605.13	599.74	2,445.28	2,382.22	63.06	38.778						
10,400.00	7,148.00	6,900.00	6,842.15	104.60	27.54	64.34	-605.13	599.74	2,541.18	2,478.25	62.93	40.380						
10,500.00	7,148.00	6,900.00	6,842.15	107.53	27.54	64.34	-605.13	599.74	2,637.38	2,574.57	62.81	41.988						
10,600.00	7,148.00	6,900.00	6,842.15	110.47	27.54	64.34	-605.13	599.74	2,733.86	2,671.16	62.70	43.600						
10,700.00	7,148.00	6,900.00	6,842.15	113.41	27.54	64.34	-605.13	599.74	2,830.59	2,767.98	62.60	45.215						
10,800.00	7,148.00	6,900.00	6,842.15	116.36	27.54	64.34	-605.13	599.74	2,927.53	2,865.02	62.51	46.833						
10,900.00	7,148.00	6,900.00	6,842.15	119.31	27.54	64.34	-605.13	599.74	3,024.67	2,962.25	62.42	48.454						
11,000.00	7,148.00	6,900.00	6,842.15	122.26	27.54	64.34	-605.13	599.74	3,121.99	3,059.65	62.34	50.076						
11,100.00	7,148.00	6,900.00	6,842.15	125.22	27.54	64.34	-605.13	599.74	3,219.48	3,157.21	62.27	51.701						
11,200.00	7,148.00	6,900.00	6,842.15	128.18	27.54	64.34	-605.13	599.74	3,317.12	3,254.91	62.20	53.326						
11,300.00	7,148.00	6,900.00	6,842.15	131.14	27.54	64.34	-605.13	599.74	3,414.89	3,352.75	62.14	54.952						
11,400.00	7,148.00	6,900.00	6,842.15	134.11	27.54	64.34	-605.13	599.74	3,512.79	3,450.70	62.09	56.578						
11,500.00	7,148.00	6,900.00	6,842.15	137.08	27.54	64.34	-605.13	599.74	3,610.80	3,548.77	62.04	58.205						
11,600.00	7,148.00	6,900.00	6,842.15	140.05	27.54	64.34	-605.13	599.74	3,708.92	3,646.93	61.99	59.832						
11,700.00	7,148.00	6,900.00	6,842.15	143.03	27.54	64.34	-605.13	599.74	3,807.14	3,745.19	61.95	61.458						
11,800.00	7,148.00	6,900.00	6,842.15	146.00	27.54	64.34	-605.13	599.74	3,905.45	3,843.54	61.91	63.084						
11,900.00	7,148.00	6,900.00	6,842.15	148.98	27.54	64.34	-605.13	599.74	4,003.84	3,941.97	61.87	64.710						
12,000.00	7,148.00	6,900.00	6,842.15	151.96	27.54	64.34	-605.13	599.74	4,102.31	4,040.47	61.84	66.334						
12,100.00	7,148.00	6,900.00	6,842.15	154.94	27.54	64.34	-605.13	599.74	4,200.85	4,139.04	61.82	67.957						
12,200.00	7,148.00	6,900.00	6,842.15	157.93	27.54	64.34	-605.13	599.74	4,299.46	4,237.67	61.79	69.579						
12,300.00	7,148.00	6,900.00	6,842.15	160.91	27.54	64.34	-605.13	599.74	4,398.13	4,336.36	61.77	71.200						
12,400.00	7,148.00	6,900.00	6,842.15	163.90	27.54	64.34	-605.13	599.74	4,496.87	4,435.11	61.75	72.819						
12,500.00	7,148.00	6,900.00	6,842.15	166.89	27.54	64.34	-605.13	599.74	4,595.65	4,533.91	61.74	74.436						
12,600.00	7,148.00	6,900.00	6,842.15	169.88	27.54	64.34	-605.13	599.74	4,694.49	4,632.76	61.73	76.052						
12,700.00	7,148.00	6,900.00	6,842.15	172.87	27.54	64.34	-605.13	599.74	4,793.37	4,731.65	61.72	77.665						
12,800.00	7,148.00	6,900.00	6,842.15	175.86	27.54	64.34	-605.13	599.74	4,892.30	4,830.59	61.71	79.277						
12,900.00	7,148.00	6,900.00	6,842.15	178.86	27.54	64.34	-605.13	599.74	4,991.28	4,929.57	61.71	80.886						



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design		Rosa Unit 42 - Rosa Unit #832H - OH - Plan #1												Offset Site Error:		0.00 ft
Survey Program:		0-MWD+HDGM				Rule Assigned:				Offset Well Error:		0.00 ft				
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance				Warning			
Measured Depth	Vertical Depth	Measured Depth	Vertical Depth	Reference	Offset	Highside Toolface	+N/-S	+E/-W	Between Centres	Between Ellipses	Minimum Separation	Separation Factor				
(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)					
0.00	0.00	0.00	0.00	0.00	0.00	-152.52	-67.01	-34.86	75.54							
100.00	100.00	100.00	100.00	0.36	0.36	-152.52	-67.01	-34.86	75.54	74.82	0.72	105.357				
200.00	200.00	200.00	200.00	0.72	0.72	-152.52	-67.01	-34.86	75.54	74.10	1.43	52.679				
300.00	300.00	300.00	300.00	1.08	1.08	-152.52	-67.01	-34.86	75.54	73.38	2.15	35.119				
400.00	400.00	400.00	400.00	1.43	1.43	-152.52	-67.01	-34.86	75.54	72.67	2.87	26.339				
500.00	500.00	500.00	500.00	1.79	1.79	-152.52	-67.01	-34.86	75.54	71.95	3.58	21.071	CC			
600.00	599.98	598.50	598.48	2.14	2.13	-68.55	-68.48	-34.02	75.83	71.55	4.27	17.745	ES			
700.00	699.84	696.45	696.30	2.49	2.46	-75.11	-72.86	-31.53	77.40	72.46	4.95	15.645				
800.00	799.53	793.46	792.94	2.85	2.79	-84.52	-80.06	-27.42	82.28	76.65	5.63	14.615				
900.00	899.22	889.49	888.29	3.21	3.14	-93.75	-89.98	-21.77	92.12	85.81	6.31	14.595	SF			
1,000.00	998.91	984.37	982.07	3.57	3.49	-101.66	-102.50	-14.63	107.04	100.06	6.98	15.325				
1,100.00	1,098.60	1,077.91	1,074.00	3.94	3.86	-107.93	-117.48	-6.09	126.69	119.05	7.65	16.571				
1,200.00	1,198.28	1,171.73	1,165.65	4.31	4.24	-112.74	-134.92	3.85	150.38	142.07	8.31	18.087				
1,300.00	1,297.97	1,268.02	1,259.57	4.68	4.66	-116.37	-153.33	14.34	175.46	166.45	9.01	19.476				
1,400.00	1,397.66	1,364.30	1,353.50	5.05	5.08	-119.10	-171.74	24.83	201.03	191.32	9.72	20.690				
1,500.00	1,497.34	1,460.59	1,447.42	5.42	5.51	-121.21	-190.14	35.32	226.94	216.51	10.43	21.765				
1,600.00	1,597.03	1,556.87	1,541.35	5.79	5.94	-122.88	-208.55	45.81	253.07	241.93	11.14	22.716				
1,700.00	1,696.72	1,653.16	1,635.27	6.16	6.38	-124.25	-226.96	56.30	279.37	267.52	11.86	23.560				
1,800.00	1,796.40	1,749.44	1,729.20	6.53	6.82	-125.38	-245.36	66.79	305.80	293.22	12.58	24.312				
1,900.00	1,896.09	1,845.73	1,823.12	6.90	7.27	-126.33	-263.77	77.28	332.31	319.01	13.30	24.985				
2,000.00	1,995.78	1,942.01	1,917.05	7.28	7.72	-127.14	-282.17	87.77	358.90	344.88	14.02	25.591				
2,100.00	2,095.47	2,038.30	2,010.98	7.65	8.17	-127.84	-300.58	98.26	385.55	370.80	14.75	26.137				
2,200.00	2,195.15	2,134.59	2,104.90	8.03	8.62	-128.44	-318.99	108.75	412.24	396.76	15.48	26.633				
2,300.00	2,294.84	2,230.87	2,198.83	8.40	9.08	-128.98	-337.39	119.24	438.97	422.76	16.21	27.085				
2,400.00	2,394.53	2,327.16	2,292.75	8.77	9.53	-129.45	-355.80	129.73	465.73	448.79	16.94	27.497				
2,500.00	2,494.21	2,423.44	2,386.68	9.15	9.99	-129.87	-374.20	140.22	492.52	474.85	17.67	27.876				
2,600.00	2,593.90	2,519.73	2,480.60	9.52	10.44	-130.25	-392.61	150.71	519.33	500.93	18.40	28.224				
2,700.00	2,693.59	2,616.01	2,574.53	9.90	10.90	-130.59	-411.02	161.20	546.16	527.03	19.13	28.545				
2,800.00	2,793.28	2,712.30	2,668.45	10.27	11.36	-130.90	-429.42	171.69	573.01	553.14	19.87	28.843				
2,900.00	2,892.96	2,808.58	2,762.38	10.65	11.82	-131.18	-447.83	182.19	599.87	579.26	20.60	29.119				
3,000.00	2,992.65	2,904.87	2,856.31	11.02	12.28	-131.44	-466.24	192.68	626.74	605.40	21.34	29.375				
3,100.00	3,092.34	3,001.15	2,950.23	11.40	12.74	-131.68	-484.64	203.17	653.62	631.55	22.07	29.615				
3,200.00	3,192.02	3,097.44	3,044.16	11.77	13.20	-131.89	-503.05	213.66	680.51	657.71	22.81	29.839				
3,300.00	3,291.71	3,193.72	3,138.08	12.14	13.67	-132.09	-521.45	224.15	707.41	683.87	23.54	30.048				
3,400.00	3,391.40	3,290.01	3,232.01	12.52	14.13	-132.28	-539.86	234.64	734.32	710.04	24.28	30.245				
3,500.00	3,491.09	3,386.29	3,325.93	12.90	14.59	-132.45	-558.27	245.13	761.24	736.22	25.02	30.429				
3,600.00	3,590.77	3,482.58	3,419.86	13.27	15.05	-132.61	-576.67	255.62	788.16	762.40	25.75	30.604				
3,700.00	3,690.46	3,578.86	3,513.79	13.65	15.52	-132.76	-595.08	266.11	815.08	788.59	26.49	30.768				
3,800.00	3,790.15	3,675.15	3,607.71	14.02	15.98	-132.91	-613.49	276.60	842.02	814.79	27.23	30.923				
3,900.00	3,889.83	3,771.43	3,701.64	14.40	16.44	-133.04	-631.89	287.09	868.95	840.98	27.97	31.070				
4,000.00	3,989.52	3,867.72	3,795.56	14.77	16.91	-133.16	-650.30	297.58	895.89	867.18	28.71	31.209				
4,100.00	4,089.21	3,964.01	3,889.49	15.15	17.37	-133.28	-668.70	308.07	922.83	893.39	29.45	31.341				
4,200.00	4,188.90	4,060.29	3,983.41	15.52	17.84	-133.39	-687.11	318.56	949.78	919.60	30.18	31.466				
4,300.00	4,288.58	4,156.58	4,077.34	15.90	18.30	-133.49	-705.52	329.05	976.73	945.81	30.92	31.585				
4,400.00	4,388.27	4,252.86	4,171.26	16.27	18.77	-133.59	-723.92	339.54	1,003.68	972.02	31.66	31.699				
4,500.00	4,487.96	4,349.15	4,265.19	16.65	19.23	-133.69	-742.33	350.03	1,030.64	998.24	32.40	31.807				
4,600.00	4,587.64	4,445.43	4,359.12	17.02	19.70	-133.78	-760.73	360.52	1,057.60	1,024.45	33.14	31.910				
4,700.00	4,687.33	4,541.72	4,453.04	17.40	20.16	-133.86	-779.14	371.01	1,084.56	1,050.67	33.88	32.009				
4,800.00	4,787.02	4,638.00	4,546.97	17.77	20.63	-133.94	-797.55	381.50	1,111.52	1,076.89	34.62	32.103				
4,900.00	4,886.70	4,734.29	4,640.89	18.15	21.09	-134.02	-815.95	391.99	1,138.48	1,103.12	35.36	32.193				
5,000.00	4,986.39	4,830.57	4,734.82	18.53	21.56	-134.09	-834.36	402.48	1,165.45	1,129.34	36.11	32.279				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #832H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation		Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)		
5,100.00	5,086.08	4,926.86	4,828.74	18.90	22.02	-134.16	-852.77	412.97	1,192.42	1,155.57	36.85	32.362	
5,200.00	5,185.77	5,023.14	4,922.67	19.28	22.49	-134.23	-871.17	423.47	1,219.38	1,181.80	37.59	32.442	
5,300.00	5,285.45	5,119.43	5,016.59	19.65	22.95	-134.29	-889.58	433.96	1,246.36	1,208.03	38.33	32.518	
5,400.00	5,385.14	5,215.71	5,110.52	20.03	23.42	-134.35	-907.98	444.45	1,273.33	1,234.26	39.07	32.591	
5,500.00	5,484.83	5,312.00	5,204.45	20.40	23.88	-134.41	-926.39	454.94	1,300.30	1,260.49	39.81	32.662	
5,600.00	5,584.51	5,408.28	5,298.37	20.78	24.35	-134.46	-944.80	465.43	1,327.27	1,286.72	40.55	32.729	
5,700.00	5,684.20	5,504.57	5,392.30	21.15	24.81	-134.52	-963.20	475.92	1,354.25	1,312.96	41.29	32.795	
5,800.00	5,783.89	5,600.85	5,486.22	21.53	25.28	-134.57	-981.61	486.41	1,381.23	1,339.19	42.04	32.858	
5,900.00	5,883.58	5,697.14	5,580.15	21.91	25.75	-134.62	-1,000.01	496.90	1,408.20	1,365.43	42.78	32.918	
6,000.00	5,983.26	5,793.43	5,674.07	22.28	26.21	-134.67	-1,018.42	507.39	1,435.18	1,391.66	43.52	32.977	
6,100.00	6,082.95	5,889.71	5,768.00	22.66	26.68	-134.71	-1,036.83	517.88	1,462.16	1,417.90	44.26	33.033	
6,200.00	6,182.64	5,986.00	5,861.92	23.03	27.15	-134.76	-1,055.23	528.37	1,489.14	1,444.14	45.01	33.087	
6,300.00	6,282.32	6,082.28	5,955.85	23.41	27.61	-134.80	-1,073.64	538.86	1,516.12	1,470.37	45.75	33.140	
6,400.00	6,382.01	6,178.57	6,045.78	23.78	28.07	-96.64	-1,092.05	549.35	1,543.10	1,497.65	46.49	33.193	
6,500.00	6,481.72	6,274.86	6,137.07	24.16	28.52	-97.92	-1,109.69	559.84	1,570.08	1,524.53	47.23	33.246	
6,600.00	6,581.57	6,371.15	6,233.36	24.54	28.98	94.73	-1,127.33	570.33	1,597.06	1,551.41	47.97	33.299	
6,700.00	6,679.68	6,467.44	6,329.65	24.91	29.44	95.72	-1,145.00	580.82	1,624.04	1,578.29	48.71	33.352	
6,800.00	6,773.66	6,563.73	6,425.96	25.29	29.90	96.53	-1,162.67	591.31	1,651.02	1,605.17	49.45	33.405	
6,900.00	6,861.17	6,659.02	6,522.27	25.66	30.36	96.42	-1,180.34	601.80	1,678.00	1,632.05	50.19	33.458	
7,000.00	6,940.07	6,754.31	6,618.58	26.04	30.82	95.53	-1,198.01	612.29	1,704.98	1,658.93	50.93	33.511	
7,100.00	7,008.42	6,849.60	6,714.89	26.41	31.28	94.11	-1,215.68	622.78	1,731.96	1,685.81	51.67	33.564	
7,200.00	7,064.53	6,945.69	6,811.18	26.79	31.74	92.50	-1,233.35	633.27	1,758.94	1,712.70	52.41	33.617	
7,300.00	7,107.02	7,041.78	6,907.47	27.16	32.20	91.02	-1,251.02	643.76	1,785.92	1,739.58	53.15	33.670	
7,400.00	7,134.84	7,104.99	7,034.68	27.54	32.66	88.77	-1,268.69	654.25	1,812.90	1,766.46	53.89	33.723	
7,500.00	7,147.31	7,168.05	7,047.15	27.91	33.12	86.64	-1,286.36	664.74	1,839.88	1,793.34	54.63	33.776	
7,600.00	7,148.00	7,247.52	7,014.03	28.29	33.58	84.18	-1,282.36	675.23	1,866.86	1,820.22	55.37	33.829	
7,700.00	7,148.00	7,327.01	7,020.91	28.66	34.04	81.55	-1,278.36	685.72	1,893.84	1,847.10	56.11	33.882	
7,800.00	7,148.00	7,406.50	7,027.80	29.04	34.50	79.21	-1,259.80	696.21	1,920.82	1,874.08	56.85	33.935	
7,828.33	7,148.00	7,486.00	7,034.68	29.41	34.96	78.61	-1,257.11	706.70	1,947.80	1,901.06	57.59	33.988	
7,900.00	7,148.00	7,565.49	7,041.57	29.79	35.42	77.22	-1,250.88	717.19	1,974.78	1,927.94	58.33	34.041	
8,000.00	7,148.00	7,644.98	7,048.46	30.16	35.88	75.57	-1,243.46	727.68	2,001.76	1,954.92	59.07	34.094	
8,100.00	7,148.00	7,724.47	7,055.35	30.54	36.34	74.41	-1,236.04	738.17	2,028.74	1,981.90	59.81	34.147	
8,200.00	7,148.00	7,803.96	7,062.24	30.91	36.80	73.05	-1,228.62	748.66	2,055.72	2,008.88	60.55	34.200	
8,300.00	7,148.00	7,883.45	7,069.13	31.29	37.26	71.28	-1,221.20	759.15	2,082.70	2,035.86	61.29	34.253	
8,400.00	7,148.00	7,962.94	7,076.02	31.66	37.72	70.43	-1,213.78	769.64	2,109.68	2,062.84	62.03	34.306	
8,500.00	7,148.00	8,042.43	7,082.91	32.04	38.18	69.45	-1,206.36	780.13	2,136.66	2,089.82	62.77	34.359	
8,600.00	7,148.00	8,121.92	7,089.80	32.41	38.64	68.39	-1,198.94	790.62	2,163.64	2,116.80	63.51	34.412	
8,700.00	7,148.00	8,201.41	7,096.69	32.79	39.10	67.62	-1,191.52	801.11	2,190.62	2,143.78	64.25	34.465	
8,800.00	7,148.00	8,280.90	7,103.58	33.16	39.56	66.33	-1,184.10	811.60	2,217.60	2,170.76	64.99	34.518	
8,900.00	7,148.00	8,360.39	7,110.47	33.54	40.02	65.33	-1,176.68	822.09	2,244.58	2,197.74	65.73	34.571	
9,000.00	7,148.00	8,439.88	7,117.36	33.91	40.48	64.47	-1,169.26	832.58	2,271.56	2,224.72	66.47	34.624	
9,100.00	7,148.00	8,519.37	7,124.25	34.29	40.94	63.33	-1,161.84	843.07	2,298.54	2,251.70	67.21	34.677	
9,200.00	7,148.00	8,598.86	7,131.14	34.66	41.40	62.33	-1,154.42	853.56	2,325.52	2,278.68	67.95	34.730	
9,300.00	7,148.00	8,678.35	7,138.03	35.04	41.86	61.33	-1,147.00	864.05	2,352.50	2,305.66	68.69	34.783	
9,400.00	7,148.00	8,757.84	7,144.92	35.41	42.32	60.33	-1,139.58	874.54	2,379.48	2,332.64	69.43	34.836	
9,500.00	7,148.00	8,837.33	7,151.81	35.79	42.78	59.33	-1,132.16	885.03	2,406.46	2,359.62	70.17	34.889	
9,600.00	7,148.00	8,916.82	7,158.70	36.16	43.24	58.33	-1,124.74	895.52	2,433.44	2,386.60	70.91	34.942	
9,700.00	7,148.00	8,996.31	7,165.59	36.54	43.70	57.33	-1,117.32	906.01	2,460.42	2,413.58	71.65	34.995	
9,800.00	7,148.00	9,075.80	7,172.48	36.91	44.16	56.33	-1,110.00	916.50	2,487.40	2,440.56	72.39	35.048	
9,900.00	7,148.00	9,155.29	7,179.37	37.29	44.62	55.33	-1,102.58	926.99	2,514.38	2,467.54	73.13	35.101	
10,000.00	7,148.00	9,234.78	7,186.26	37.66	45.08	54.33	-1,095.16	937.48	2,541.36	2,494.52	73.87	35.154	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #832H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Reference Depth (ft)	Measured Depth (ft)	Vertical Offset Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Minimum Separation (ft)	Separation Factor	Warning
							+N/-S (ft)	+E/-W (ft)					
10,100.00	7,148.00	6,750.00	6,607.64	95.84	30.71	66.33	-1,201.46	589.34	2,536.74	2,454.90	81.85	30.994	
10,200.00	7,148.00	6,750.00	6,607.64	98.75	30.71	66.33	-1,201.46	589.34	2,622.04	2,540.17	81.87	32.028	
10,300.00	7,148.00	6,750.00	6,607.64	101.67	30.71	66.33	-1,201.46	589.34	2,708.34	2,626.47	81.87	33.081	
10,400.00	7,148.00	6,750.00	6,607.64	104.60	30.71	66.33	-1,201.46	589.34	2,795.55	2,713.69	81.86	34.151	
10,500.00	7,148.00	6,728.91	6,587.15	107.53	30.64	65.47	-1,197.43	592.26	2,883.21	2,801.59	81.62	35.326	
10,600.00	7,148.00	6,726.57	6,584.87	110.47	30.63	65.37	-1,196.98	592.55	2,971.92	2,890.35	81.56	36.438	
10,700.00	7,148.00	6,724.36	6,582.72	113.41	30.62	65.28	-1,196.55	592.80	3,061.31	2,979.81	81.50	37.561	
10,800.00	7,148.00	6,722.28	6,580.70	116.36	30.62	65.20	-1,196.15	593.04	3,151.34	3,069.90	81.44	38.697	
10,900.00	7,148.00	6,700.00	6,558.93	119.31	30.54	64.29	-1,191.87	595.14	3,242.30	3,161.14	81.16	39.950	
11,000.00	7,148.00	6,700.00	6,558.93	122.26	30.54	64.29	-1,191.87	595.14	3,333.38	3,252.26	81.11	41.097	
11,100.00	7,148.00	6,700.00	6,558.93	125.22	30.54	64.29	-1,191.87	595.14	3,424.95	3,343.89	81.06	42.252	
11,200.00	7,148.00	6,700.00	6,558.93	128.18	30.54	64.29	-1,191.87	595.14	3,516.97	3,435.97	81.01	43.416	
11,300.00	7,148.00	6,700.00	6,558.93	131.14	30.54	64.29	-1,191.87	595.14	3,609.43	3,528.48	80.95	44.587	
11,400.00	7,148.00	6,700.00	6,558.93	134.11	30.54	64.29	-1,191.87	595.14	3,702.27	3,621.38	80.90	45.765	
11,500.00	7,148.00	6,700.00	6,558.93	137.08	30.54	64.29	-1,191.87	595.14	3,795.48	3,714.64	80.84	46.950	
11,600.00	7,148.00	6,700.00	6,558.93	140.05	30.54	64.29	-1,191.87	595.14	3,889.03	3,808.24	80.79	48.140	
11,700.00	7,148.00	6,700.00	6,558.93	143.03	30.54	64.29	-1,191.87	595.14	3,982.89	3,902.16	80.73	49.335	
11,800.00	7,148.00	6,700.00	6,558.93	146.00	30.54	64.29	-1,191.87	595.14	4,077.04	3,996.36	80.68	50.536	
11,900.00	7,148.00	6,700.00	6,558.93	148.98	30.54	64.29	-1,191.87	595.14	4,171.47	4,090.84	80.62	51.740	
12,000.00	7,148.00	6,700.00	6,558.93	151.96	30.54	64.29	-1,191.87	595.14	4,266.14	4,185.57	80.57	52.949	
12,100.00	7,148.00	6,700.00	6,558.93	154.94	30.54	64.29	-1,191.87	595.14	4,361.06	4,280.54	80.52	54.161	
12,200.00	7,148.00	6,700.00	6,558.93	157.93	30.54	64.29	-1,191.87	595.14	4,456.20	4,375.73	80.47	55.377	
12,300.00	7,148.00	6,700.00	6,558.93	160.91	30.54	64.29	-1,191.87	595.14	4,551.54	4,471.12	80.42	56.596	
12,400.00	7,148.00	6,700.00	6,558.93	163.90	30.54	64.29	-1,191.87	595.14	4,647.09	4,566.71	80.38	57.817	
12,500.00	7,148.00	6,700.00	6,558.93	166.89	30.54	64.29	-1,191.87	595.14	4,742.81	4,662.48	80.33	59.041	
12,600.00	7,148.00	6,700.00	6,558.93	169.88	30.54	64.29	-1,191.87	595.14	4,838.71	4,758.42	80.29	60.267	
12,700.00	7,148.00	6,700.00	6,558.93	172.87	30.54	64.29	-1,191.87	595.14	4,934.77	4,854.53	80.25	61.496	



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Semi Major Axis (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	0.00	-151.37	-79.37	-43.33	90.43				
100.00	100.00	100.00	100.00	0.36	0.36	0.36	-151.37	-79.37	-43.33	90.43	89.71	0.72	126.129	
200.00	200.00	200.00	200.00	0.72	0.72	0.72	-151.37	-79.37	-43.33	90.43	88.99	1.43	63.064	
300.00	300.00	300.00	300.00	1.08	1.08	1.08	-151.37	-79.37	-43.33	90.43	88.28	2.15	42.043	
400.00	400.00	400.00	400.00	1.43	1.43	1.43	-151.37	-79.37	-43.33	90.43	87.56	2.87	31.532	
500.00	500.00	500.00	500.00	1.79	1.79	1.79	-151.37	-79.37	-43.33	90.43	86.84	3.58	25.226	CC, ES
600.00	599.98	596.92	596.90	2.14	2.12	2.12	-66.19	-80.88	-43.97	91.39	87.13	4.27	21.420	
700.00	699.84	693.61	693.46	2.49	2.45	2.45	-69.18	-85.39	-45.88	94.48	89.54	4.93	19.151	
800.00	799.53	789.90	789.40	2.85	2.78	2.78	-73.29	-92.86	-49.05	100.43	94.82	5.61	17.914	
900.00	899.22	885.70	884.53	3.21	3.12	3.12	-76.81	-103.23	-53.46	110.16	103.87	6.28	17.532	
1,000.00	998.91	980.80	978.55	3.57	3.47	3.47	-79.50	-116.42	-59.05	123.52	116.56	6.96	17.750	
1,100.00	1,098.60	1,076.69	1,072.85	3.94	3.84	3.84	-81.46	-132.41	-65.84	140.09	132.45	7.65	18.322	
1,200.00	1,198.28	1,175.10	1,169.51	4.31	4.24	4.24	-83.00	-149.39	-73.04	157.42	149.06	8.36	18.821	
1,300.00	1,297.97	1,273.51	1,266.18	4.68	4.64	4.64	-84.23	-166.37	-80.25	174.84	165.75	9.09	19.237	
1,400.00	1,397.66	1,371.92	1,362.84	5.05	5.05	5.05	-85.24	-183.35	-87.45	192.33	182.51	9.82	19.588	
1,500.00	1,497.34	1,470.32	1,459.51	5.42	5.47	5.47	-86.08	-200.32	-94.66	209.86	199.31	10.55	19.888	
1,600.00	1,597.03	1,568.73	1,556.17	5.79	5.89	5.89	-86.79	-217.30	-101.86	227.43	216.14	11.29	20.147	
1,700.00	1,696.72	1,667.14	1,652.84	6.16	6.31	6.31	-87.39	-234.28	-109.07	245.03	233.00	12.03	20.372	
1,800.00	1,796.40	1,765.55	1,749.50	6.53	6.74	6.74	-87.92	-251.26	-116.27	262.65	249.88	12.77	20.569	
1,900.00	1,896.09	1,863.96	1,846.17	6.90	7.17	7.17	-88.38	-268.24	-123.48	280.29	266.77	13.51	20.743	
2,000.00	1,995.78	1,962.37	1,942.83	7.28	7.60	7.60	-88.79	-285.21	-130.68	297.94	283.68	14.26	20.897	
2,100.00	2,095.47	2,060.77	2,039.49	7.65	8.03	8.03	-89.15	-302.19	-137.89	315.61	300.61	15.00	21.035	
2,200.00	2,195.15	2,159.18	2,136.16	8.03	8.46	8.46	-89.47	-319.17	-145.09	333.29	317.54	15.75	21.159	
2,300.00	2,294.84	2,257.59	2,232.82	8.40	8.89	8.89	-89.76	-336.15	-152.29	350.98	334.48	16.50	21.272	
2,400.00	2,394.53	2,356.00	2,329.49	8.77	9.33	9.33	-90.02	-353.13	-159.50	368.67	351.43	17.25	21.373	
2,500.00	2,494.21	2,454.41	2,426.15	9.15	9.76	9.76	-90.26	-370.10	-166.70	386.38	368.38	18.00	21.466	
2,600.00	2,593.90	2,552.82	2,522.82	9.52	10.20	10.20	-90.48	-387.08	-173.91	404.09	385.34	18.75	21.551	
2,700.00	2,693.59	2,651.23	2,619.48	9.90	10.64	10.64	-90.68	-404.06	-181.11	421.80	402.30	19.50	21.629	
2,800.00	2,793.28	2,749.63	2,716.15	10.27	11.07	11.07	-90.86	-421.04	-188.32	439.52	419.27	20.25	21.700	
2,900.00	2,892.96	2,848.04	2,812.81	10.65	11.51	11.51	-91.03	-438.02	-195.52	457.24	436.24	21.01	21.766	
3,000.00	2,992.65	2,946.45	2,909.48	11.02	11.95	11.95	-91.19	-455.00	-202.73	474.97	453.21	21.76	21.828	
3,100.00	3,092.34	3,044.86	3,006.14	11.40	12.39	12.39	-91.33	-471.97	-209.93	492.70	470.18	22.51	21.885	
3,200.00	3,192.02	3,143.27	3,102.81	11.77	12.83	12.83	-91.47	-488.95	-217.14	510.43	487.16	23.27	21.938	
3,300.00	3,291.71	3,241.68	3,199.47	12.14	13.27	13.27	-91.59	-505.93	-224.34	528.17	504.14	24.02	21.987	
3,400.00	3,391.40	3,340.08	3,296.14	12.52	13.71	13.71	-91.71	-522.91	-231.55	545.90	521.13	24.78	22.033	
3,500.00	3,491.09	3,438.49	3,392.80	12.90	14.15	14.15	-91.82	-539.89	-238.75	563.64	538.11	25.53	22.077	
3,600.00	3,590.77	3,536.90	3,489.46	13.27	14.59	14.59	-91.92	-556.86	-245.96	581.38	555.10	26.29	22.117	
3,700.00	3,690.46	3,635.31	3,586.13	13.65	15.03	15.03	-92.02	-573.84	-253.16	599.13	572.08	27.04	22.156	
3,800.00	3,790.15	3,733.72	3,682.79	14.02	15.47	15.47	-92.11	-590.82	-260.37	616.87	589.07	27.80	22.192	
3,900.00	3,889.83	3,832.13	3,779.46	14.40	15.91	15.91	-92.20	-607.80	-267.57	634.62	606.06	28.55	22.226	
4,000.00	3,989.52	3,930.53	3,876.12	14.77	16.35	16.35	-92.28	-624.78	-274.78	652.36	623.05	29.31	22.258	
4,100.00	4,089.21	4,028.94	3,972.79	15.15	16.79	16.79	-92.36	-641.75	-281.98	670.11	640.05	30.07	22.288	
4,200.00	4,188.90	4,127.35	4,069.45	15.52	17.23	17.23	-92.43	-658.73	-289.18	687.86	657.04	30.82	22.317	
4,300.00	4,288.58	4,225.76	4,166.12	15.90	17.67	17.67	-92.50	-675.71	-296.39	705.61	674.03	31.58	22.345	
4,400.00	4,388.27	4,324.17	4,262.78	16.27	18.11	18.11	-92.57	-692.69	-303.59	723.36	691.03	32.34	22.371	
4,500.00	4,487.96	4,422.58	4,359.45	16.65	18.56	18.56	-92.63	-709.67	-310.80	741.12	708.02	33.09	22.396	
4,600.00	4,587.64	4,520.99	4,456.11	17.02	19.00	19.00	-92.69	-726.64	-318.00	758.87	725.02	33.85	22.419	
4,700.00	4,687.33	4,619.39	4,552.78	17.40	19.44	19.44	-92.75	-743.62	-325.21	776.62	742.02	34.61	22.442	
4,800.00	4,787.02	4,717.80	4,649.44	17.77	19.88	19.88	-92.81	-760.60	-332.41	794.38	759.01	35.36	22.463	
4,900.00	4,886.70	4,816.21	4,746.10	18.15	20.32	20.32	-92.86	-777.58	-339.62	812.13	776.01	36.12	22.484	
5,000.00	4,986.39	4,914.62	4,842.77	18.53	20.76	20.76	-92.91	-794.56	-346.82	829.89	793.01	36.88	22.503	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation		Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor		
5,100.00	5,086.08	5,013.03	4,939.43	18.90	21.21	-92.96	-811.54	-354.03	847.65	810.01	37.64	22.522		
5,200.00	5,185.77	5,111.44	5,036.10	19.28	21.65	-93.00	-828.51	-361.23	865.40	827.01	38.39	22.540		
5,300.00	5,285.45	5,209.84	5,132.76	19.65	22.09	-93.05	-845.49	-368.44	883.16	844.01	39.15	22.557		
5,400.00	5,385.14	5,308.25	5,229.43	20.03	22.53	-93.09	-862.47	-375.64	900.92	861.01	39.91	22.574		
5,500.00	5,484.83	5,406.66	5,326.09	20.40	22.98	-93.13	-879.45	-382.85	918.68	878.01	40.67	22.590		
5,600.00	5,584.51	5,505.07	5,422.76	20.78	23.42	-93.17	-896.43	-390.05	936.44	895.01	41.43	22.605		
5,700.00	5,684.20	5,603.48	5,519.42	21.15	23.86	-93.21	-913.40	-397.26	954.20	912.01	42.18	22.620		
5,800.00	5,783.89	5,701.89	5,616.09	21.53	24.30	-93.24	-930.38	-404.46	971.96	929.01	42.94	22.634		
5,900.00	5,883.58	5,800.29	5,712.75	21.91	24.74	-93.28	-947.36	-411.66	989.72	946.02	43.70	22.648		
6,000.00	5,983.26	5,898.70	5,809.42	22.28	25.19	-93.31	-964.34	-418.87	1,007.48	963.02	44.46	22.661		
6,100.00	6,082.95	5,997.11	5,906.08	22.66	25.63	-93.35	-981.32	-426.07	1,025.24	980.02	45.22	22.673		
6,200.00	6,182.64	6,095.52	6,002.75	23.03	26.07	-93.38	-998.29	-433.28	1,043.00	997.02	45.98	22.685		
6,300.00	6,282.32	6,193.93	6,099.41	23.41	26.52	-93.41	-1,015.27	-440.48	1,060.76	1,014.03	46.74	22.697		
6,400.00	6,382.01	6,292.34	6,196.07	23.78	26.96	-93.44	-1,032.25	-447.69	1,078.52	1,031.03	47.49	22.709		
6,500.00	6,481.72	6,390.74	6,292.74	24.16	27.40	-96.30	-1,049.23	-454.89	1,096.29	1,048.04	48.25	22.721		
6,600.00	6,581.57	6,488.50	6,388.76	24.47	27.84	91.40	-1,066.09	-462.05	1,114.01	1,065.09	48.92	22.772		
6,700.00	6,679.68	6,583.71	6,482.30	24.74	28.27	89.53	-1,082.53	-468.77	1,131.75	1,082.25	49.50	22.864		
6,800.00	6,773.66	6,681.15	6,578.11	24.99	28.66	89.04	-1,099.51	-465.74	1,149.67	1,099.63	50.04	22.974		
6,900.00	6,861.17	6,783.92	6,677.36	25.24	29.01	88.83	-1,117.34	-466.52	1,167.43	1,116.85	50.59	23.077		
7,000.00	6,940.07	6,892.97	6,777.83	25.52	29.30	88.77	-1,135.67	-468.69	1,184.54	1,133.36	51.18	23.145		
7,100.00	7,008.42	7,009.21	6,876.21	25.90	29.54	88.82	-1,153.95	-349.85	1,200.42	1,148.53	51.89	23.135		
7,200.00	7,064.53	7,133.31	6,967.69	26.45	29.72	88.95	-1,171.35	-268.11	1,214.48	1,161.63	52.85	22.981		
7,300.00	7,107.02	7,265.40	7,045.91	27.23	29.82	89.13	-1,186.76	-163.08	1,226.07	1,171.81	54.26	22.595		
7,400.00	7,134.84	7,404.73	7,103.40	28.27	29.85	89.31	-1,198.83	-37.05	1,234.56	1,178.20	56.36	21.906		
7,500.00	7,147.31	7,549.41	7,133.08	29.56	29.96	89.42	-1,206.20	104.04	1,239.43	1,180.15	59.27	20.910		
7,600.00	7,148.00	7,668.99	7,136.01	31.06	31.56	89.45	-1,208.52	223.50	1,241.05	1,178.56	62.50	19.858		
7,700.00	7,148.00	7,768.98	7,136.04	32.76	33.24	89.45	-1,210.03	323.48	1,242.33	1,176.47	65.86	18.862		
7,800.00	7,148.00	7,868.98	7,136.06	34.65	35.11	89.45	-1,211.54	423.47	1,243.61	1,174.02	69.59	17.870		
7,900.00	7,148.00	7,968.97	7,136.08	36.69	37.12	89.45	-1,213.05	523.45	1,244.89	1,171.26	73.63	16.907		
8,000.00	7,148.00	8,068.96	7,136.10	38.86	39.26	89.45	-1,214.57	623.43	1,246.17	1,168.24	77.94	15.990		
8,100.00	7,148.00	8,168.95	7,136.12	41.14	41.51	89.45	-1,216.08	723.41	1,247.45	1,164.99	82.46	15.128		
8,200.00	7,148.00	8,268.94	7,136.15	43.50	43.86	89.46	-1,217.59	823.39	1,248.73	1,161.57	87.17	14.325		
8,300.00	7,148.00	8,368.93	7,136.17	45.95	46.28	89.46	-1,219.10	923.37	1,250.02	1,157.98	92.04	13.582		
8,400.00	7,148.00	8,468.93	7,136.19	48.46	48.77	89.46	-1,220.61	1,023.35	1,251.30	1,154.26	97.04	12.895		
8,500.00	7,148.00	8,568.92	7,136.21	51.03	51.31	89.46	-1,222.13	1,123.33	1,252.58	1,150.42	102.15	12.262		
8,600.00	7,148.00	8,668.91	7,136.23	53.65	53.91	89.46	-1,223.64	1,223.31	1,253.86	1,146.49	107.37	11.678		
8,700.00	7,148.00	8,768.90	7,136.26	56.30	56.55	89.46	-1,225.15	1,323.29	1,255.14	1,142.47	112.67	11.140		
8,800.00	7,148.00	8,868.89	7,136.28	59.00	59.22	89.47	-1,226.66	1,423.27	1,256.42	1,138.38	118.04	10.644		
8,900.00	7,148.00	8,968.88	7,136.30	61.72	61.93	89.47	-1,228.17	1,523.25	1,257.70	1,134.23	123.47	10.186		
9,000.00	7,148.00	9,068.88	7,136.32	64.47	64.67	89.47	-1,229.68	1,623.23	1,258.98	1,130.02	128.96	9.762		
9,100.00	7,148.00	9,168.87	7,136.35	67.25	67.43	89.47	-1,231.20	1,723.21	1,260.26	1,125.76	134.50	9.370		
9,200.00	7,148.00	9,268.86	7,136.37	70.04	70.21	89.47	-1,232.71	1,823.19	1,261.54	1,121.46	140.09	9.005		
9,300.00	7,148.00	9,368.85	7,136.39	72.86	73.02	89.47	-1,234.22	1,923.17	1,262.82	1,117.12	145.71	8.667		
9,400.00	7,148.00	9,468.84	7,136.41	75.69	75.84	89.47	-1,235.73	2,023.15	1,264.10	1,112.74	151.36	8.352		
9,500.00	7,148.00	9,568.84	7,136.43	78.53	78.67	89.48	-1,237.24	2,123.13	1,265.38	1,108.34	157.04	8.057		
9,600.00	7,148.00	9,668.83	7,136.46	81.39	81.52	89.48	-1,238.75	2,223.11	1,266.66	1,103.91	162.76	7.783		
9,700.00	7,148.00	9,768.82	7,136.48	84.26	84.38	89.48	-1,240.27	2,323.09	1,267.94	1,099.45	168.49	7.525		
9,800.00	7,148.00	9,868.81	7,136.50	87.14	87.26	89.48	-1,241.78	2,423.07	1,269.23	1,094.98	174.25	7.284		
9,900.00	7,148.00	9,968.80	7,136.52	90.03	90.14	89.48	-1,243.29	2,523.05	1,270.51	1,090.48	180.02	7.057		
10,000.00	7,148.00	10,068.79	7,136.55	92.93	93.03	89.48	-1,244.80	2,623.03	1,271.79	1,085.97	185.82	6.844		
10,100.00	7,148.00	10,168.79	7,136.57	95.84	95.94	89.49	-1,246.31	2,723.01	1,273.07	1,081.44	191.63	6.643		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #1													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation		Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor		
10,200.00	7,148.00	10,268.78	7,136.59	98.75	98.84	89.49	-1,247.83	2,822.99	1,274.35	1,076.89	197.46	6.454		
10,300.00	7,148.00	10,368.77	7,136.61	101.67	101.76	89.49	-1,249.34	2,922.97	1,275.63	1,072.33	203.30	6.275		
10,400.00	7,148.00	10,468.76	7,136.63	104.60	104.68	89.49	-1,250.85	3,022.95	1,276.91	1,067.76	209.15	6.105		
10,500.00	7,148.00	10,568.75	7,136.66	107.53	107.61	89.49	-1,252.36	3,122.93	1,278.19	1,063.18	215.01	5.945		
10,600.00	7,148.00	10,668.75	7,136.68	110.47	110.55	89.49	-1,253.87	3,222.92	1,279.47	1,058.59	220.88	5.792		
10,700.00	7,148.00	10,768.74	7,136.70	113.41	113.49	89.49	-1,255.38	3,322.90	1,280.75	1,053.98	226.77	5.648		
10,800.00	7,148.00	10,868.73	7,136.72	116.36	116.43	89.50	-1,256.90	3,422.88	1,282.03	1,049.37	232.66	5.510		
10,900.00	7,148.00	10,968.72	7,136.74	119.31	119.38	89.50	-1,258.41	3,522.86	1,283.31	1,044.75	238.56	5.379		
11,000.00	7,148.00	11,068.71	7,136.77	122.26	122.33	89.50	-1,259.92	3,622.84	1,284.59	1,040.13	244.47	5.255		
11,100.00	7,148.00	11,168.70	7,136.79	125.22	125.29	89.50	-1,261.43	3,722.82	1,285.87	1,035.49	250.38	5.136		
11,200.00	7,148.00	11,268.70	7,136.81	128.18	128.24	89.50	-1,262.94	3,822.80	1,287.16	1,030.85	256.31	5.022		
11,300.00	7,148.00	11,368.69	7,136.83	131.14	131.21	89.50	-1,264.45	3,922.78	1,288.44	1,026.20	262.23	4.913		
11,400.00	7,148.00	11,468.68	7,136.86	134.11	134.17	89.50	-1,265.97	4,022.76	1,289.72	1,021.55	268.17	4.809		
11,500.00	7,148.00	11,568.67	7,136.88	137.08	137.14	89.51	-1,267.48	4,122.74	1,291.00	1,016.89	274.11	4.710		
11,600.00	7,148.00	11,668.66	7,136.90	140.05	140.11	89.51	-1,268.99	4,222.72	1,292.28	1,012.23	280.05	4.614		
11,700.00	7,148.00	11,768.66	7,136.92	143.03	143.09	89.51	-1,270.50	4,322.70	1,293.56	1,007.56	286.00	4.523		
11,800.00	7,148.00	11,868.65	7,136.94	146.00	146.06	89.51	-1,272.01	4,422.68	1,294.84	1,002.88	291.95	4.435		
11,900.00	7,148.00	11,968.64	7,136.97	148.98	149.04	89.51	-1,273.53	4,522.66	1,296.12	998.21	297.91	4.351		
12,000.00	7,148.00	12,068.63	7,136.99	151.96	152.02	89.51	-1,275.04	4,622.64	1,297.40	993.53	303.87	4.270		
12,100.00	7,148.00	12,168.62	7,137.01	154.94	155.00	89.52	-1,276.55	4,722.62	1,298.68	988.84	309.84	4.191		
12,200.00	7,148.00	12,268.61	7,137.03	157.93	157.99	89.52	-1,278.06	4,822.60	1,299.96	984.15	315.81	4.116		
12,300.00	7,148.00	12,368.61	7,137.06	160.91	160.97	89.52	-1,279.57	4,922.58	1,301.24	979.46	321.78	4.044		
12,400.00	7,148.00	12,468.60	7,137.08	163.90	163.96	89.52	-1,281.08	5,022.56	1,302.52	974.77	327.76	3.974		
12,500.00	7,148.00	12,568.59	7,137.10	166.89	166.95	89.52	-1,282.60	5,122.54	1,303.80	970.07	333.74	3.907		
12,600.00	7,148.00	12,668.58	7,137.12	169.88	169.94	89.52	-1,284.11	5,222.52	1,305.09	965.37	339.72	3.842		
12,700.00	7,148.00	12,768.57	7,137.14	172.87	172.93	89.52	-1,285.62	5,322.50	1,306.37	960.67	345.70	3.779		
12,800.00	7,148.00	12,868.56	7,137.17	175.86	175.93	89.53	-1,287.13	5,422.48	1,307.65	955.96	351.69	3.718		
12,900.00	7,148.00	12,968.56	7,137.19	178.86	178.92	89.53	-1,288.64	5,522.46	1,308.93	951.25	357.68	3.660		
13,000.00	7,148.00	13,068.55	7,137.21	181.85	181.92	89.53	-1,290.15	5,622.44	1,310.21	946.54	363.67	3.603		
13,100.00	7,148.00	13,168.54	7,137.23	184.85	184.91	89.53	-1,291.67	5,722.42	1,311.49	941.83	369.66	3.548		
13,200.00	7,148.00	13,268.53	7,137.25	187.84	187.91	89.53	-1,293.18	5,822.40	1,312.77	937.11	375.66	3.495		
13,300.00	7,148.00	13,368.52	7,137.28	190.84	190.91	89.53	-1,294.69	5,922.39	1,314.05	932.40	381.65	3.443		
13,400.00	7,148.00	13,468.52	7,137.30	193.84	193.91	89.53	-1,296.20	6,022.37	1,315.33	927.68	387.65	3.393		
13,500.00	7,148.00	13,568.51	7,137.32	196.84	196.91	89.54	-1,297.71	6,122.35	1,316.61	922.96	393.65	3.345		
13,600.00	7,148.00	13,668.50	7,137.34	199.84	199.91	89.54	-1,299.23	6,222.33	1,317.89	918.24	399.66	3.298		
13,700.00	7,148.00	13,768.49	7,137.37	202.84	202.91	89.54	-1,300.74	6,322.31	1,319.17	913.51	405.66	3.252		
13,800.00	7,148.00	13,868.48	7,137.39	205.84	205.92	89.54	-1,302.25	6,422.29	1,320.45	908.79	411.67	3.208		
13,900.00	7,148.00	13,968.47	7,137.41	208.84	208.92	89.54	-1,303.76	6,522.27	1,321.74	904.06	417.67	3.165		
14,000.00	7,148.00	14,068.47	7,137.43	211.85	211.93	89.54	-1,305.27	6,622.25	1,323.02	899.33	423.68	3.123		
14,100.00	7,148.00	14,168.46	7,137.45	214.85	214.93	89.54	-1,306.78	6,722.23	1,324.30	894.60	429.69	3.082		
14,200.00	7,148.00	14,268.45	7,137.48	217.86	217.94	89.55	-1,308.30	6,822.21	1,325.58	889.87	435.70	3.042		
14,300.00	7,148.00	14,368.44	7,137.50	220.86	220.95	89.55	-1,309.81	6,922.19	1,326.86	885.14	441.72	3.004		
14,400.00	7,148.00	14,468.43	7,137.52	223.87	223.95	89.55	-1,311.32	7,022.17	1,328.14	880.41	447.73	2.966		
14,500.00	7,148.00	14,568.43	7,137.54	226.87	226.96	89.55	-1,312.83	7,122.15	1,329.42	875.67	453.75	2.930		
14,600.00	7,148.00	14,668.42	7,137.57	229.88	229.97	89.55	-1,314.34	7,222.13	1,330.70	870.94	459.76	2.894		
14,700.00	7,148.00	14,768.41	7,137.59	232.89	232.98	89.55	-1,315.85	7,322.11	1,331.98	866.20	465.78	2.860		
14,800.00	7,148.00	14,868.40	7,137.61	235.90	235.99	89.55	-1,317.37	7,422.09	1,333.26	861.46	471.80	2.826		
14,900.00	7,148.00	14,968.39	7,137.63	238.90	239.00	89.55	-1,318.88	7,522.07	1,334.54	856.73	477.82	2.793		
15,000.00	7,148.00	15,068.38	7,137.65	241.91	242.01	89.56	-1,320.39	7,622.05	1,335.82	851.99	483.84	2.761		
15,100.00	7,148.00	15,168.38	7,137.68	244.92	245.02	89.56	-1,321.90	7,722.03	1,337.10	847.25	489.86	2.730		
15,200.00	7,148.00	15,268.37	7,137.70	247.93	248.04	89.56	-1,323.41	7,822.01	1,338.38	842.50	495.88	2.699		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Minimum Separation (ft)	Separation Factor	Warning
							+N/-S (ft)	+E/-W (ft)					
15,300.00	7,148.00	15,368.36	7,137.72	250.94	251.05	89.56	-1,324.93	7,921.99	1,339.67	837.76	501.90	2.669	
15,400.00	7,148.00	15,468.35	7,137.74	253.95	254.06	89.56	-1,326.44	8,021.97	1,340.95	833.02	507.93	2.640	
15,500.00	7,148.00	15,568.34	7,137.76	256.96	257.08	89.56	-1,327.95	8,121.95	1,342.23	828.28	513.95	2.612	
15,600.00	7,148.00	15,668.34	7,137.79	259.97	260.09	89.56	-1,329.46	8,221.93	1,343.51	823.53	519.98	2.584	
15,700.00	7,148.00	15,768.33	7,137.81	262.99	263.10	89.57	-1,330.97	8,321.91	1,344.79	818.79	526.00	2.557	
15,800.00	7,148.00	15,868.32	7,137.83	266.00	266.12	89.57	-1,332.48	8,421.89	1,346.07	814.04	532.03	2.530	
15,900.00	7,148.00	15,968.31	7,137.85	269.01	269.13	89.57	-1,334.00	8,521.87	1,347.35	809.29	538.06	2.504	
16,000.00	7,148.00	16,068.30	7,137.88	272.02	272.15	89.57	-1,335.51	8,621.85	1,348.63	804.55	544.09	2.479	
16,100.00	7,148.00	16,168.29	7,137.90	275.04	275.16	89.57	-1,337.02	8,721.84	1,349.91	799.80	550.11	2.454	
16,200.00	7,148.00	16,268.29	7,137.92	278.05	278.18	89.57	-1,338.53	8,821.82	1,351.19	795.05	556.14	2.430	
16,300.00	7,148.00	16,368.28	7,137.94	281.06	281.20	89.57	-1,340.04	8,921.80	1,352.47	790.30	562.17	2.406	
16,400.00	7,148.00	16,468.27	7,137.96	284.08	284.21	89.58	-1,341.55	9,021.78	1,353.75	785.55	568.20	2.383	
16,500.00	7,148.00	16,568.26	7,137.99	287.09	287.23	89.58	-1,343.07	9,121.76	1,355.03	780.80	574.24	2.360	
16,600.00	7,148.00	16,631.32	7,138.00	290.11	289.13	89.58	-1,344.03	9,184.81	1,356.83	777.84	578.99	2.343 SF	
16,700.00	7,148.00	16,631.32	7,138.00	293.12	289.13	89.58	-1,344.03	9,184.81	1,364.50	785.05	579.45	2.355	
16,800.00	7,148.00	16,631.32	7,138.00	296.14	289.13	89.58	-1,344.03	9,184.81	1,379.39	802.49	576.90	2.391	
16,900.00	7,148.00	16,631.32	7,138.00	299.15	289.13	89.58	-1,344.03	9,184.81	1,401.28	829.71	571.57	2.452	
17,000.00	7,148.00	16,631.32	7,138.00	302.17	289.13	89.58	-1,344.03	9,184.81	1,429.84	866.05	563.79	2.536	
17,044.78	7,148.00	16,631.32	7,138.00	303.52	289.13	89.58	-1,344.03	9,184.81	1,444.69	885.07	559.62	2.582	



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #2													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	-151.37	-79.37	-43.33	90.43					
100.00	100.00	100.00	100.00	0.36	0.36	-151.37	-79.37	-43.33	90.43	89.71	0.72	126.129		
200.00	200.00	200.00	200.00	0.72	0.72	-151.37	-79.37	-43.33	90.43	88.99	1.43	63.064		
300.00	300.00	300.00	300.00	1.08	1.08	-151.37	-79.37	-43.33	90.43	88.28	2.15	42.043		
400.00	400.00	400.00	400.00	1.43	1.43	-151.37	-79.37	-43.33	90.43	87.56	2.87	31.532		
500.00	500.00	500.00	500.00	1.79	1.79	-151.37	-79.37	-43.33	90.43	86.84	3.58	25.226	CC, ES	
600.00	599.98	596.92	596.90	2.14	2.12	-66.19	-80.88	-43.97	91.39	87.13	4.27	21.420		
700.00	699.84	693.61	693.46	2.49	2.45	-69.18	-85.39	-45.88	94.48	89.54	4.93	19.151		
800.00	799.53	789.90	789.40	2.85	2.78	-73.29	-92.86	-49.05	100.43	94.82	5.61	17.914		
900.00	899.22	885.70	884.53	3.21	3.12	-76.81	-103.24	-53.46	110.16	103.87	6.28	17.532		
1,000.00	998.91	980.80	978.55	3.57	3.47	-79.50	-116.43	-59.05	123.52	116.56	6.96	17.750		
1,100.00	1,098.60	1,076.68	1,072.84	3.94	3.84	-81.46	-132.41	-65.83	140.10	132.45	7.65	18.322		
1,200.00	1,198.28	1,175.09	1,169.50	4.31	4.24	-83.00	-149.40	-73.04	157.44	149.07	8.36	18.823		
1,300.00	1,297.97	1,273.49	1,266.16	4.68	4.64	-84.23	-166.39	-80.25	174.86	165.78	9.09	19.240		
1,400.00	1,397.66	1,371.90	1,362.82	5.05	5.05	-85.24	-183.37	-87.45	192.36	182.54	9.82	19.591		
1,500.00	1,497.34	1,470.31	1,459.48	5.42	5.47	-86.08	-200.36	-94.66	209.90	199.35	10.55	19.892		
1,600.00	1,597.03	1,568.71	1,556.14	5.79	5.89	-86.79	-217.34	-101.87	227.47	216.19	11.29	20.151		
1,700.00	1,696.72	1,667.12	1,652.81	6.16	6.31	-87.39	-234.33	-109.07	245.08	233.05	12.03	20.376		
1,800.00	1,796.40	1,765.53	1,749.47	6.53	6.74	-87.92	-251.32	-116.28	262.71	249.94	12.77	20.574		
1,900.00	1,896.09	1,863.93	1,846.13	6.90	7.17	-88.38	-268.30	-123.49	280.36	266.85	13.51	20.748		
2,000.00	1,995.78	1,962.34	1,942.79	7.28	7.60	-88.79	-285.29	-130.69	298.02	283.77	14.26	20.903		
2,100.00	2,095.47	2,060.75	2,039.45	7.65	8.03	-89.15	-302.27	-137.90	315.70	300.70	15.00	21.041		
2,200.00	2,195.15	2,159.15	2,136.11	8.03	8.46	-89.47	-319.26	-145.11	333.39	317.64	15.75	21.166		
2,300.00	2,294.84	2,257.56	2,232.77	8.40	8.89	-89.76	-336.25	-152.31	351.08	334.58	16.50	21.278		
2,400.00	2,394.53	2,355.97	2,329.44	8.77	9.33	-90.02	-353.23	-159.52	368.79	351.54	17.25	21.380		
2,500.00	2,494.21	2,454.38	2,426.10	9.15	9.76	-90.26	-370.22	-166.72	386.50	368.50	18.00	21.473		
2,600.00	2,593.90	2,552.78	2,522.76	9.52	10.20	-90.48	-387.21	-173.93	404.22	385.47	18.75	21.558		
2,700.00	2,693.59	2,651.19	2,619.42	9.90	10.64	-90.68	-404.19	-181.14	421.94	402.44	19.50	21.636		
2,800.00	2,793.28	2,749.60	2,716.08	10.27	11.07	-90.86	-421.18	-188.34	439.67	419.41	20.25	21.708		
2,900.00	2,892.96	2,848.00	2,812.74	10.65	11.51	-91.03	-438.16	-195.55	457.40	436.39	21.01	21.774		
3,000.00	2,992.65	2,946.41	2,909.41	11.02	11.95	-91.18	-455.15	-202.76	475.13	453.37	21.76	21.835		
3,100.00	3,092.34	3,044.82	3,006.07	11.40	12.39	-91.33	-472.14	-209.96	492.87	470.36	22.51	21.892		
3,200.00	3,192.02	3,143.22	3,102.73	11.77	12.83	-91.46	-489.12	-217.17	510.61	487.34	23.27	21.945		
3,300.00	3,291.71	3,241.63	3,199.39	12.14	13.27	-91.59	-506.11	-224.38	528.36	504.33	24.02	21.995		
3,400.00	3,391.40	3,340.04	3,296.05	12.52	13.71	-91.71	-523.09	-231.58	546.10	521.32	24.78	22.041		
3,500.00	3,491.09	3,438.44	3,392.71	12.90	14.15	-91.82	-540.08	-238.79	563.85	538.32	25.53	22.085		
3,600.00	3,590.77	3,536.85	3,489.38	13.27	14.59	-91.92	-557.07	-246.00	581.60	555.31	26.29	22.126		
3,700.00	3,690.46	3,635.26	3,586.04	13.65	15.03	-92.02	-574.05	-253.20	599.35	572.31	27.04	22.164		
3,800.00	3,790.15	3,733.67	3,682.70	14.02	15.47	-92.11	-591.04	-260.41	617.10	589.30	27.80	22.200		
3,900.00	3,889.83	3,832.07	3,779.36	14.40	15.91	-92.20	-608.02	-267.61	634.86	606.30	28.55	22.234		
4,000.00	3,989.52	3,930.48	3,876.02	14.77	16.35	-92.28	-625.01	-274.82	652.61	623.30	29.31	22.266		
4,100.00	4,089.21	4,028.89	3,972.68	15.15	16.79	-92.35	-642.00	-282.03	670.37	640.30	30.07	22.297		
4,200.00	4,188.90	4,127.29	4,069.35	15.52	17.23	-92.43	-658.98	-289.23	688.13	657.30	30.82	22.326		
4,300.00	4,288.58	4,225.70	4,166.01	15.90	17.67	-92.50	-675.97	-296.44	705.89	674.31	31.58	22.353		
4,400.00	4,388.27	4,324.11	4,262.67	16.27	18.12	-92.56	-692.95	-303.65	723.64	691.31	32.34	22.380		
4,500.00	4,487.96	4,422.51	4,359.33	16.65	18.56	-92.63	-709.94	-310.85	741.41	708.31	33.09	22.404		
4,600.00	4,587.64	4,520.92	4,455.99	17.02	19.00	-92.69	-726.93	-318.06	759.17	725.32	33.85	22.428		
4,700.00	4,687.33	4,619.33	4,552.65	17.40	19.44	-92.75	-743.91	-325.27	776.93	742.32	34.61	22.451		
4,800.00	4,787.02	4,717.73	4,649.31	17.77	19.88	-92.80	-760.90	-332.47	794.69	759.33	35.36	22.472		
4,900.00	4,886.70	4,816.14	4,745.98	18.15	20.32	-92.85	-777.88	-339.68	812.46	776.34	36.12	22.493		
5,000.00	4,986.39	4,914.55	4,842.64	18.53	20.77	-92.90	-794.87	-346.89	830.22	793.34	36.88	22.512		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #2													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation		Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor		
5,100.00	5,086.08	5,012.96	4,939.30	18.90	21.21	-92.95	-811.86	-354.09	847.99	810.35	37.64	22.531		
5,200.00	5,185.77	5,111.36	5,035.96	19.28	21.65	-93.00	-828.84	-361.30	865.75	827.36	38.39	22.549		
5,300.00	5,285.45	5,209.77	5,132.62	19.65	22.09	-93.04	-845.83	-368.50	883.52	844.37	39.15	22.566		
5,400.00	5,385.14	5,308.18	5,229.28	20.03	22.54	-93.08	-862.81	-375.71	901.28	861.37	39.91	22.583		
5,500.00	5,484.83	5,406.58	5,325.95	20.40	22.98	-93.13	-879.80	-382.92	919.05	878.38	40.67	22.599		
5,600.00	5,584.51	5,504.99	5,422.61	20.78	23.42	-93.17	-896.79	-390.12	936.82	895.39	41.43	22.614		
5,700.00	5,684.20	5,603.40	5,519.27	21.15	23.86	-93.20	-913.77	-397.33	954.59	912.40	42.18	22.629		
5,800.00	5,783.89	5,701.80	5,615.93	21.53	24.31	-93.24	-930.76	-404.54	972.36	929.41	42.94	22.643		
5,900.00	5,883.58	5,800.21	5,712.59	21.91	24.75	-93.27	-947.75	-411.74	990.12	946.42	43.70	22.657		
6,000.00	5,983.26	5,898.62	5,809.25	22.28	25.19	-93.31	-964.73	-418.95	1,007.89	963.43	44.46	22.670		
6,100.00	6,082.95	5,997.02	5,905.92	22.66	25.63	-93.34	-981.72	-426.16	1,025.66	980.44	45.22	22.683		
6,200.00	6,182.64	6,095.43	6,002.58	23.03	26.08	-93.37	-998.70	-433.36	1,043.43	997.46	45.98	22.695		
6,300.00	6,282.32	6,193.84	6,099.24	23.41	26.52	-93.40	-1,015.69	-440.57	1,061.20	1,014.47	46.74	22.707		
6,400.00	6,382.01	6,292.25	6,195.90	23.78	26.96	-93.43	-1,032.68	-447.78	1,078.97	1,031.48	47.49	22.718		
6,500.00	6,481.72	6,390.65	6,292.56	24.16	27.40	-96.29	-1,049.66	-454.98	1,096.74	1,048.49	48.25	22.730		
6,600.00	6,581.57	6,488.41	6,388.58	24.47	27.84	91.41	-1,066.53	-462.14	1,114.48	1,065.56	48.92	22.781		
6,700.00	6,679.68	6,583.64	6,482.14	24.74	28.27	89.53	-1,082.98	-468.87	1,132.22	1,082.72	49.50	22.873		
6,800.00	6,773.66	6,681.24	6,578.10	24.99	28.67	89.04	-1,099.99	-465.83	1,150.15	1,100.11	50.04	22.983		
6,900.00	6,861.17	6,784.19	6,677.53	25.24	29.01	88.83	-1,117.84	-466.55	1,167.90	1,117.31	50.59	23.085		
7,000.00	6,940.07	6,893.45	6,778.18	25.52	29.31	88.77	-1,136.18	-468.59	1,184.98	1,133.80	51.18	23.152		
7,100.00	7,008.42	7,009.93	6,876.71	25.90	29.55	88.83	-1,154.44	-349.52	1,200.82	1,148.93	51.89	23.141		
7,200.00	7,064.53	7,134.29	6,968.28	26.45	29.72	88.96	-1,171.80	-267.50	1,214.82	1,161.97	52.85	22.985		
7,300.00	7,107.02	7,266.62	7,046.48	27.23	29.82	89.14	-1,187.13	-162.15	1,226.33	1,172.05	54.27	22.596		
7,400.00	7,134.84	7,406.14	7,103.81	28.27	29.85	89.32	-1,199.08	-35.82	1,234.72	1,178.35	56.37	21.904		
7,500.00	7,147.31	7,550.94	7,133.21	29.56	29.97	89.42	-1,206.29	105.46	1,239.48	1,180.18	59.29	20.904		
7,600.00	7,148.00	7,670.08	7,136.01	31.06	31.57	89.45	-1,208.49	224.49	1,241.00	1,178.49	62.51	19.853		
7,700.00	7,148.00	7,770.07	7,136.03	32.76	33.26	89.45	-1,209.92	324.47	1,242.20	1,176.32	65.88	18.855		
7,800.00	7,148.00	7,870.06	7,136.05	34.65	35.13	89.45	-1,211.35	424.45	1,243.41	1,173.79	69.61	17.862		
7,900.00	7,148.00	7,970.05	7,136.08	36.69	37.14	89.45	-1,212.78	524.44	1,244.61	1,170.95	73.65	16.898		
8,000.00	7,148.00	8,070.05	7,136.10	38.86	39.28	89.45	-1,214.22	624.42	1,245.81	1,167.85	77.96	15.981		
8,100.00	7,148.00	8,170.04	7,136.12	41.14	41.53	89.45	-1,215.65	724.40	1,247.01	1,164.53	82.48	15.119		
8,200.00	7,148.00	8,270.03	7,136.14	43.50	43.88	89.46	-1,217.08	824.38	1,248.21	1,161.02	87.19	14.316		
8,300.00	7,148.00	8,370.02	7,136.16	45.95	46.30	89.46	-1,218.51	924.37	1,249.41	1,157.35	92.06	13.572		
8,400.00	7,148.00	8,470.02	7,136.18	48.46	48.79	89.46	-1,219.95	1,024.35	1,250.61	1,153.55	97.06	12.885		
8,500.00	7,148.00	8,570.01	7,136.20	51.03	51.34	89.46	-1,221.38	1,124.33	1,251.82	1,149.64	102.18	12.251		
8,600.00	7,148.00	8,670.00	7,136.22	53.65	53.93	89.46	-1,222.81	1,224.31	1,253.02	1,145.63	107.39	11.668		
8,700.00	7,148.00	8,770.00	7,136.24	56.30	56.57	89.46	-1,224.24	1,324.30	1,254.22	1,141.53	112.69	11.130		
8,800.00	7,148.00	8,869.99	7,136.26	59.00	59.25	89.46	-1,225.68	1,424.28	1,255.42	1,137.36	118.06	10.634		
8,900.00	7,148.00	8,969.98	7,136.29	61.72	61.95	89.47	-1,227.11	1,524.26	1,256.62	1,133.12	123.50	10.175		
9,000.00	7,148.00	9,069.97	7,136.31	64.47	64.69	89.47	-1,228.54	1,624.24	1,257.82	1,128.84	128.99	9.752		
9,100.00	7,148.00	9,169.97	7,136.33	67.25	67.45	89.47	-1,229.97	1,724.23	1,259.02	1,124.50	134.53	9.359		
9,200.00	7,148.00	9,269.96	7,136.35	70.04	70.24	89.47	-1,231.41	1,824.21	1,260.23	1,120.12	140.11	8.995		
9,300.00	7,148.00	9,369.95	7,136.37	72.86	73.04	89.47	-1,232.84	1,924.19	1,261.43	1,115.70	145.73	8.656		
9,400.00	7,148.00	9,469.95	7,136.39	75.69	75.86	89.47	-1,234.27	2,024.17	1,262.63	1,111.25	151.38	8.341		
9,500.00	7,148.00	9,569.94	7,136.41	78.53	78.69	89.47	-1,235.70	2,124.16	1,263.83	1,106.76	157.07	8.046		
9,600.00	7,148.00	9,669.93	7,136.43	81.39	81.54	89.48	-1,237.14	2,224.14	1,265.03	1,102.25	162.78	7.771		
9,700.00	7,148.00	9,769.92	7,136.45	84.26	84.41	89.48	-1,238.57	2,324.12	1,266.23	1,097.72	168.51	7.514		
9,800.00	7,148.00	9,869.92	7,136.47	87.14	87.28	89.48	-1,240.00	2,424.10	1,267.43	1,093.16	174.27	7.273		
9,900.00	7,148.00	9,969.91	7,136.50	90.03	90.16	89.48	-1,241.43	2,524.09	1,268.64	1,088.59	180.05	7.046		
10,000.00	7,148.00	10,069.90	7,136.52	92.93	93.06	89.48	-1,242.87	2,624.07	1,269.84	1,084.00	185.84	6.833		
10,100.00	7,148.00	10,169.89	7,136.54	95.84	95.96	89.48	-1,244.30	2,724.05	1,271.04	1,079.39	191.65	6.632		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #2												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation		Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S	+E/-W	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)		
10,200.00	7,148.00	10,269.89	7,136.56	98.75	98.87	89.48	-1,245.73	2,824.03	1,272.24	1,074.76	197.48	6.442	
10,300.00	7,148.00	10,369.88	7,136.58	101.67	101.78	89.49	-1,247.16	2,924.02	1,273.44	1,070.12	203.32	6.263	
10,400.00	7,148.00	10,469.87	7,136.60	104.60	104.70	89.49	-1,248.60	3,024.00	1,274.64	1,065.47	209.17	6.094	
10,500.00	7,148.00	10,569.87	7,136.62	107.53	107.63	89.49	-1,250.03	3,123.98	1,275.84	1,060.81	215.03	5.933	
10,600.00	7,148.00	10,669.86	7,136.64	110.47	110.57	89.49	-1,251.46	3,223.96	1,277.05	1,056.14	220.91	5.781	
10,700.00	7,148.00	10,769.85	7,136.66	113.41	113.51	89.49	-1,252.89	3,323.95	1,278.25	1,051.46	226.79	5.636	
10,800.00	7,148.00	10,869.84	7,136.68	116.36	116.45	89.49	-1,254.33	3,423.93	1,279.45	1,046.77	232.68	5.499	
10,900.00	7,148.00	10,969.84	7,136.71	119.31	119.40	89.49	-1,255.76	3,523.91	1,280.65	1,042.07	238.58	5.368	
11,000.00	7,148.00	11,069.83	7,136.73	122.26	122.35	89.50	-1,257.19	3,623.89	1,281.85	1,037.36	244.49	5.243	
11,100.00	7,148.00	11,169.82	7,136.75	125.22	125.30	89.50	-1,258.62	3,723.88	1,283.05	1,032.65	250.40	5.124	
11,200.00	7,148.00	11,269.82	7,136.77	128.18	128.26	89.50	-1,260.06	3,823.86	1,284.25	1,027.93	256.33	5.010	
11,300.00	7,148.00	11,369.81	7,136.79	131.14	131.23	89.50	-1,261.49	3,923.84	1,285.46	1,023.20	262.25	4.902	
11,400.00	7,148.00	11,469.80	7,136.81	134.11	134.19	89.50	-1,262.92	4,023.82	1,286.66	1,018.47	268.19	4.798	
11,500.00	7,148.00	11,569.79	7,136.83	137.08	137.16	89.50	-1,264.35	4,123.81	1,287.86	1,013.73	274.13	4.698	
11,600.00	7,148.00	11,669.79	7,136.85	140.05	140.13	89.50	-1,265.79	4,223.79	1,289.06	1,008.99	280.07	4.603	
11,700.00	7,148.00	11,769.78	7,136.87	143.03	143.10	89.51	-1,267.22	4,323.77	1,290.26	1,004.24	286.02	4.511	
11,800.00	7,148.00	11,869.77	7,136.89	146.00	146.08	89.51	-1,268.65	4,423.75	1,291.46	999.49	291.97	4.423	
11,900.00	7,148.00	11,969.76	7,136.92	148.98	149.06	89.51	-1,270.08	4,523.74	1,292.66	994.73	297.93	4.339	
12,000.00	7,148.00	12,069.76	7,136.94	151.96	152.04	89.51	-1,271.52	4,623.72	1,293.87	989.97	303.89	4.258	
12,100.00	7,148.00	12,169.75	7,136.96	154.94	155.02	89.51	-1,272.95	4,723.70	1,295.07	985.21	309.86	4.180	
12,200.00	7,148.00	12,269.74	7,136.98	157.93	158.00	89.51	-1,274.38	4,823.68	1,296.27	980.44	315.83	4.104	
12,300.00	7,148.00	12,369.74	7,137.00	160.91	160.99	89.51	-1,275.81	4,923.67	1,297.47	975.67	321.80	4.032	
12,400.00	7,148.00	12,469.73	7,137.02	163.90	163.98	89.52	-1,277.25	5,023.65	1,298.67	970.90	327.78	3.962	
12,500.00	7,148.00	12,569.72	7,137.04	166.89	166.97	89.52	-1,278.68	5,123.63	1,299.87	966.12	333.75	3.895	
12,600.00	7,148.00	12,669.71	7,137.06	169.88	169.96	89.52	-1,280.11	5,223.61	1,301.07	961.34	339.73	3.830	
12,700.00	7,148.00	12,769.71	7,137.08	172.87	172.95	89.52	-1,281.54	5,323.60	1,302.28	956.56	345.72	3.767	
12,800.00	7,148.00	12,869.70	7,137.11	175.86	175.94	89.52	-1,282.98	5,423.58	1,303.48	951.77	351.70	3.706	
12,900.00	7,148.00	12,969.69	7,137.13	178.86	178.94	89.52	-1,284.41	5,523.56	1,304.68	946.99	357.69	3.647	
13,000.00	7,148.00	13,069.69	7,137.15	181.85	181.93	89.52	-1,285.84	5,623.54	1,305.88	942.20	363.68	3.591	
13,100.00	7,148.00	13,169.68	7,137.17	184.85	184.93	89.53	-1,287.27	5,723.53	1,307.08	937.40	369.68	3.536	
13,200.00	7,148.00	13,269.67	7,137.19	187.84	187.93	89.53	-1,288.71	5,823.51	1,308.28	932.61	375.67	3.483	
13,300.00	7,148.00	13,369.66	7,137.21	190.84	190.92	89.53	-1,290.14	5,923.49	1,309.48	927.81	381.67	3.431	
13,400.00	7,148.00	13,469.66	7,137.23	193.84	193.92	89.53	-1,291.57	6,023.47	1,310.69	923.02	387.67	3.381	
13,500.00	7,148.00	13,569.65	7,137.25	196.84	196.92	89.53	-1,293.00	6,123.46	1,311.89	918.22	393.67	3.332	
13,600.00	7,148.00	13,669.64	7,137.27	199.84	199.93	89.53	-1,294.44	6,223.44	1,313.09	913.42	399.67	3.285	
13,700.00	7,148.00	13,769.63	7,137.29	202.84	202.93	89.53	-1,295.87	6,323.42	1,314.29	908.61	405.68	3.240	
13,800.00	7,148.00	13,869.63	7,137.32	205.84	205.93	89.53	-1,297.30	6,423.40	1,315.49	903.81	411.68	3.195	
13,900.00	7,148.00	13,969.62	7,137.34	208.84	208.94	89.54	-1,298.73	6,523.39	1,316.69	899.00	417.69	3.152	
14,000.00	7,148.00	14,069.61	7,137.36	211.85	211.94	89.54	-1,300.17	6,623.37	1,317.89	894.20	423.70	3.110	
14,100.00	7,148.00	14,169.61	7,137.38	214.85	214.95	89.54	-1,301.60	6,723.35	1,319.10	889.39	429.71	3.070	
14,200.00	7,148.00	14,269.60	7,137.40	217.86	217.95	89.54	-1,303.03	6,823.34	1,320.30	884.58	435.72	3.030	
14,300.00	7,148.00	14,369.59	7,137.42	220.86	220.96	89.54	-1,304.46	6,923.32	1,321.50	879.77	441.73	2.992	
14,400.00	7,148.00	14,469.58	7,137.44	223.87	223.97	89.54	-1,305.90	7,023.30	1,322.70	874.96	447.74	2.954	
14,500.00	7,148.00	14,569.58	7,137.46	226.87	226.97	89.54	-1,307.33	7,123.28	1,323.90	870.14	453.76	2.918	
14,600.00	7,148.00	14,669.57	7,137.48	229.88	229.98	89.55	-1,308.76	7,223.27	1,325.10	865.33	459.78	2.882	
14,700.00	7,148.00	14,769.56	7,137.50	232.89	232.99	89.55	-1,310.19	7,323.25	1,326.30	860.51	465.79	2.847	
14,800.00	7,148.00	14,869.56	7,137.53	235.90	236.00	89.55	-1,311.63	7,423.23	1,327.51	855.69	471.81	2.814	
14,900.00	7,148.00	14,969.55	7,137.55	238.90	239.01	89.55	-1,313.06	7,523.21	1,328.71	850.88	477.83	2.781	
15,000.00	7,148.00	15,069.54	7,137.57	241.91	242.02	89.55	-1,314.49	7,623.20	1,329.91	846.06	483.85	2.749	
15,100.00	7,148.00	15,169.53	7,137.59	244.92	245.04	89.55	-1,315.92	7,723.18	1,331.11	841.24	489.87	2.717	
15,200.00	7,148.00	15,269.53	7,137.61	247.93	248.05	89.55	-1,317.36	7,823.16	1,332.31	836.42	495.89	2.687	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #834H - OH - Plan #2													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Minimum Separation (ft)	Separation Factor	Warning	
							+N/-S (ft)	+E/-W (ft)						
15,300.00	7,148.00	15,369.52	7,137.63	250.94	251.06	89.55	-1,318.79	7,923.14	1,333.51	831.60	501.92	2.657		
15,400.00	7,148.00	15,469.51	7,137.65	253.95	254.07	89.56	-1,320.22	8,023.13	1,334.71	826.78	507.94	2.628		
15,500.00	7,148.00	15,569.50	7,137.67	256.96	257.09	89.56	-1,321.65	8,123.11	1,335.92	821.95	513.96	2.599		
15,600.00	7,148.00	15,669.50	7,137.69	259.97	260.10	89.56	-1,323.09	8,223.09	1,337.12	817.13	519.99	2.571		
15,700.00	7,148.00	15,769.49	7,137.71	262.99	263.11	89.56	-1,324.52	8,323.07	1,338.32	812.30	526.01	2.544		
15,800.00	7,148.00	15,869.48	7,137.74	266.00	266.13	89.56	-1,325.95	8,423.06	1,339.52	807.48	532.04	2.518		
15,900.00	7,148.00	15,969.48	7,137.76	269.01	269.14	89.56	-1,327.38	8,523.04	1,340.72	802.65	538.07	2.492		
16,000.00	7,148.00	16,069.47	7,137.78	272.02	272.16	89.56	-1,328.82	8,623.02	1,341.92	797.83	544.10	2.466		
16,100.00	7,148.00	16,169.46	7,137.80	275.04	275.17	89.56	-1,330.25	8,723.00	1,343.12	793.00	550.13	2.441		
16,200.00	7,148.00	16,269.45	7,137.82	278.05	278.19	89.57	-1,331.68	8,822.99	1,344.33	788.17	556.15	2.417		
16,300.00	7,148.00	16,369.45	7,137.84	281.06	281.20	89.57	-1,333.11	8,922.97	1,345.53	783.34	562.18	2.393		
16,400.00	7,148.00	16,469.44	7,137.86	284.08	284.22	89.57	-1,334.55	9,022.95	1,346.73	778.51	568.21	2.370		
16,500.00	7,148.00	16,569.43	7,137.88	287.09	287.24	89.57	-1,335.98	9,122.93	1,347.93	773.68	574.25	2.347		
16,600.00	7,148.00	16,669.43	7,137.90	290.11	290.25	89.57	-1,337.41	9,222.92	1,349.13	768.85	580.28	2.325		
16,700.00	7,148.00	16,769.42	7,137.92	293.12	293.27	89.57	-1,338.84	9,322.90	1,350.33	764.02	586.31	2.303		
16,800.00	7,148.00	16,869.41	7,137.95	296.14	296.29	89.57	-1,340.28	9,422.88	1,351.53	759.19	592.34	2.282		
16,900.00	7,148.00	16,969.40	7,137.97	299.15	299.31	89.57	-1,341.71	9,522.86	1,352.74	754.36	598.38	2.261		
17,000.00	7,148.00	17,069.40	7,137.99	302.17	302.33	89.58	-1,343.14	9,622.85	1,353.94	749.53	604.41	2.240		
17,044.78	7,148.00	17,114.17	7,138.00	303.52	303.68	89.58	-1,343.78	9,667.62	1,354.48	747.36	607.11	2.231 SF		



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #835H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	-145.61	-74.23	-50.80	89.95				
100.00	100.00	100.00	100.00	0.36	0.36	-145.61	-74.23	-50.80	89.95	89.23	0.72	125.461	
200.00	200.00	200.00	200.00	0.72	0.72	-145.61	-74.23	-50.80	89.95	88.51	1.43	62.731	
300.00	300.00	300.00	300.00	1.08	1.08	-145.61	-74.23	-50.80	89.95	87.80	2.15	41.820	
400.00	400.00	400.00	400.00	1.43	1.43	-145.61	-74.23	-50.80	89.95	87.08	2.87	31.365	
500.00	500.00	500.00	500.00	1.79	1.79	-145.61	-74.23	-50.80	89.95	86.36	3.58	25.092 CC, ES	
600.00	599.98	596.98	596.96	2.14	2.13	-60.12	-75.42	-51.94	90.74	86.47	4.27	21.257	
700.00	699.84	693.83	693.68	2.49	2.45	-62.25	-78.96	-55.34	93.20	88.26	4.94	18.873	
800.00	799.53	790.80	790.30	2.85	2.79	-65.13	-84.86	-60.99	97.94	92.33	5.62	17.440	
900.00	899.22	890.50	889.53	3.21	3.14	-67.66	-91.90	-67.73	104.17	97.85	6.32	16.478	
1,000.00	998.91	990.21	988.76	3.57	3.50	-69.90	-98.94	-74.48	110.58	103.55	7.03	15.721	
1,100.00	1,098.60	1,089.92	1,087.99	3.94	3.87	-71.89	-105.98	-81.22	117.14	109.39	7.75	15.109	
1,200.00	1,198.28	1,189.62	1,187.22	4.31	4.24	-73.67	-113.02	-87.97	123.83	115.35	8.48	14.608	
1,300.00	1,297.97	1,289.33	1,286.44	4.68	4.61	-75.27	-120.06	-94.71	130.62	121.41	9.20	14.192	
1,400.00	1,397.66	1,389.04	1,385.67	5.05	4.99	-76.71	-127.10	-101.46	137.50	127.57	9.93	13.841	
1,500.00	1,497.34	1,488.74	1,484.90	5.42	5.36	-78.01	-134.14	-108.20	144.46	133.79	10.67	13.542	
1,600.00	1,597.03	1,588.45	1,584.13	5.79	5.74	-79.19	-141.17	-114.95	151.49	140.09	11.40	13.286	
1,700.00	1,696.72	1,688.16	1,683.36	6.16	6.12	-80.26	-148.21	-121.69	158.58	146.44	12.14	13.063	
1,800.00	1,796.40	1,787.86	1,782.59	6.53	6.50	-81.25	-155.25	-128.44	165.71	152.84	12.88	12.868	
1,900.00	1,896.09	1,887.57	1,881.82	6.90	6.88	-82.15	-162.29	-135.18	172.90	159.28	13.62	12.696	
2,000.00	1,995.78	1,987.27	1,981.04	7.28	7.26	-82.98	-169.33	-141.93	180.12	165.76	14.36	12.544	
2,100.00	2,095.47	2,086.98	2,080.27	7.65	7.64	-83.74	-176.37	-148.67	187.37	172.27	15.10	12.408	
2,200.00	2,195.15	2,186.69	2,179.50	8.03	8.02	-84.45	-183.41	-155.42	194.66	178.82	15.84	12.287	
2,300.00	2,294.84	2,286.39	2,278.73	8.40	8.40	-85.11	-190.45	-162.16	201.98	185.39	16.59	12.177	
2,400.00	2,394.53	2,386.10	2,377.96	8.77	8.78	-85.72	-197.48	-168.90	209.32	191.98	17.33	12.077	
2,500.00	2,494.21	2,485.81	2,477.19	9.15	9.17	-86.29	-204.52	-175.65	216.68	198.60	18.08	11.987	
2,600.00	2,593.90	2,585.51	2,576.42	9.52	9.55	-86.82	-211.56	-182.39	224.06	205.24	18.82	11.905	
2,700.00	2,693.59	2,685.22	2,675.64	9.90	9.93	-87.32	-218.60	-189.14	231.46	211.89	19.57	11.829	
2,800.00	2,793.28	2,784.92	2,774.87	10.27	10.32	-87.79	-225.64	-195.88	238.87	218.56	20.31	11.760	
2,900.00	2,892.96	2,884.63	2,874.10	10.65	10.70	-88.23	-232.68	-202.63	246.30	225.24	21.06	11.695	
3,000.00	2,992.65	2,984.34	2,973.33	11.02	11.08	-88.64	-239.72	-209.37	253.75	231.94	21.81	11.636	
3,100.00	3,092.34	3,084.04	3,072.56	11.40	11.47	-89.03	-246.76	-216.12	261.20	238.65	22.55	11.581	
3,200.00	3,192.02	3,183.75	3,171.79	11.77	11.85	-89.40	-253.79	-222.86	268.67	245.37	23.30	11.530	
3,300.00	3,291.71	3,283.46	3,271.02	12.14	12.23	-89.75	-260.83	-229.61	276.15	252.10	24.05	11.483	
3,400.00	3,391.40	3,383.16	3,370.24	12.52	12.62	-90.08	-267.87	-236.35	283.64	258.84	24.80	11.438	
3,500.00	3,491.09	3,482.87	3,469.47	12.90	13.00	-90.39	-274.91	-243.10	291.13	265.59	25.55	11.397	
3,600.00	3,590.77	3,582.58	3,568.70	13.27	13.39	-90.69	-281.95	-249.84	298.64	272.34	26.29	11.358	
3,700.00	3,690.46	3,682.28	3,667.93	13.65	13.77	-90.97	-288.99	-256.59	306.15	279.11	27.04	11.321	
3,800.00	3,790.15	3,781.99	3,767.16	14.02	14.16	-91.24	-296.03	-263.33	313.67	285.88	27.79	11.287	
3,900.00	3,889.83	3,881.69	3,866.39	14.40	14.54	-91.50	-303.07	-270.07	321.20	292.66	28.54	11.254	
4,000.00	3,989.52	3,981.40	3,965.62	14.77	14.92	-91.74	-310.10	-276.82	328.73	299.44	29.29	11.224	
4,100.00	4,089.21	4,081.11	4,064.84	15.15	15.31	-91.98	-317.14	-283.56	336.27	306.23	30.04	11.195	
4,200.00	4,188.90	4,180.81	4,164.07	15.52	15.69	-92.20	-324.18	-290.31	343.81	313.02	30.79	11.167	
4,300.00	4,288.58	4,280.52	4,263.30	15.90	16.08	-92.41	-331.22	-297.05	351.36	319.82	31.54	11.141	
4,400.00	4,388.27	4,380.23	4,362.53	16.27	16.46	-92.62	-338.26	-303.80	358.91	326.62	32.29	11.116	
4,500.00	4,487.96	4,479.93	4,461.76	16.65	16.85	-92.81	-345.30	-310.54	366.47	333.43	33.04	11.093	
4,600.00	4,587.64	4,579.64	4,560.99	17.02	17.23	-93.00	-352.34	-317.29	374.03	340.24	33.79	11.071	
4,700.00	4,687.33	4,679.34	4,660.22	17.40	17.62	-93.18	-359.37	-324.03	381.59	347.06	34.54	11.049	
4,800.00	4,787.02	4,779.05	4,759.45	17.77	18.00	-93.36	-366.41	-330.78	389.16	353.88	35.29	11.029	
4,900.00	4,886.70	4,878.76	4,858.67	18.15	18.39	-93.53	-373.45	-337.52	396.73	360.70	36.04	11.010	
5,000.00	4,986.39	4,978.46	4,957.90	18.53	18.77	-93.69	-380.49	-344.27	404.31	367.52	36.79	10.991	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #835H - OH - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
5,100.00	5,086.08	5,078.17	5,057.13	18.90	19.16	-93.84	-387.53	-351.01	411.89	374.35	37.54	10.973	
5,200.00	5,185.77	5,177.88	5,156.36	19.28	19.54	-93.99	-394.57	-357.76	419.47	381.18	38.29	10.956	
5,300.00	5,285.45	5,277.58	5,255.59	19.65	19.93	-94.14	-401.61	-364.50	427.05	388.02	39.04	10.940	
5,400.00	5,385.14	5,377.29	5,354.82	20.03	20.31	-94.28	-408.65	-371.24	434.64	394.85	39.79	10.924	
5,500.00	5,484.83	5,477.00	5,454.05	20.40	20.70	-94.41	-415.68	-377.99	442.23	401.69	40.54	10.909	
5,600.00	5,584.51	5,576.70	5,553.27	20.78	21.08	-94.54	-422.72	-384.73	449.82	408.53	41.29	10.895	
5,700.00	5,684.20	5,676.41	5,652.50	21.15	21.47	-94.67	-429.76	-391.48	457.42	415.38	42.04	10.881	
5,800.00	5,783.89	5,776.11	5,751.73	21.53	21.85	-94.79	-436.80	-398.22	465.01	422.22	42.79	10.868	
5,900.00	5,883.58	5,875.82	5,850.96	21.91	22.24	-94.91	-443.84	-404.97	472.61	429.07	43.54	10.855	
6,000.00	5,983.26	5,975.53	5,950.19	22.28	22.62	-95.02	-450.88	-411.71	480.21	435.92	44.29	10.843	
6,100.00	6,082.95	6,075.23	6,049.42	22.66	23.01	-95.13	-457.92	-418.46	487.81	442.77	45.04	10.831	
6,200.00	6,182.64	6,174.94	6,148.65	23.03	23.39	-95.24	-464.96	-425.20	495.41	449.62	45.79	10.819	
6,300.00	6,282.32	6,274.65	6,247.87	23.41	23.78	-95.34	-471.99	-431.95	503.02	456.48	46.54	10.808	
6,400.00	6,382.01	6,374.35	6,347.10	23.78	24.16	-95.44	-479.03	-438.69	510.63	463.33	47.29	10.797	
6,500.00	6,481.72	6,474.06	6,446.33	24.16	24.55	-98.16	-486.07	-445.44	518.22	470.18	48.04	10.787	
6,600.00	6,581.57	6,573.17	6,544.97	24.47	24.93	91.07	-493.07	-452.14	525.52	476.82	48.70	10.790	
6,700.00	6,679.68	6,669.52	6,640.86	24.74	25.31	91.51	-499.87	-458.66	533.10	483.83	49.27	10.819	
6,800.00	6,773.66	6,760.72	6,731.62	24.99	25.66	94.11	-506.31	-464.83	542.86	493.10	49.76	10.909	
6,900.00	6,861.17	6,856.11	6,826.67	25.24	26.01	97.63	-513.11	-467.08	556.88	506.63	50.24	11.084	
7,000.00	6,940.07	6,963.21	6,932.43	25.52	26.33	101.28	-520.91	-453.06	574.62	523.90	50.72	11.330	
7,100.00	7,008.42	7,083.34	7,046.35	25.90	26.63	104.88	-529.63	-416.49	594.98	543.90	51.08	11.647	
7,200.00	7,064.53	7,220.34	7,165.18	26.45	26.90	108.36	-539.12	-349.53	616.28	565.05	51.23	12.029	
7,300.00	7,107.02	7,377.94	7,280.53	27.23	27.18	111.52	-548.93	-243.18	636.21	584.95	51.26	12.411	
7,400.00	7,134.84	7,557.68	7,375.69	28.27	27.84	114.00	-557.92	-91.67	651.96	600.16	51.80	12.586	
7,500.00	7,147.31	7,755.30	7,427.16	29.56	29.78	115.25	-564.32	98.21	660.70	606.69	54.01	12.232	
7,600.00	7,148.00	7,891.33	7,430.93	31.06	31.72	115.29	-566.53	234.08	662.38	605.28	57.11	11.599	
7,700.00	7,148.00	7,991.32	7,430.84	32.76	33.40	115.24	-567.94	334.06	663.41	603.23	60.18	11.023	
7,800.00	7,148.00	8,091.32	7,430.74	34.65	35.26	115.19	-569.35	434.04	664.44	600.84	63.59	10.448	
7,900.00	7,148.00	8,191.31	7,430.64	36.69	37.27	115.13	-570.77	534.02	665.47	598.17	67.29	9.889	
8,000.00	7,148.00	8,291.30	7,430.54	38.86	39.41	115.08	-572.18	634.01	666.49	595.26	71.23	9.357	
8,100.00	7,148.00	8,391.29	7,430.44	41.14	41.66	115.03	-573.60	733.99	667.52	592.14	75.38	8.856	
8,200.00	7,148.00	8,491.29	7,430.34	43.50	44.00	114.98	-575.01	833.97	668.55	588.85	79.70	8.388	
8,300.00	7,148.00	8,591.28	7,430.24	45.95	46.42	114.93	-576.42	933.96	669.59	585.41	84.17	7.955	
8,400.00	7,148.00	8,691.27	7,430.14	48.46	48.92	114.88	-577.84	1,033.94	670.62	581.85	88.77	7.555	
8,500.00	7,148.00	8,791.27	7,430.04	51.03	51.46	114.83	-579.25	1,133.92	671.65	578.18	93.47	7.186	
8,600.00	7,148.00	8,891.26	7,429.94	53.65	54.06	114.78	-580.67	1,233.91	672.68	574.41	98.27	6.845	
8,700.00	7,148.00	8,991.25	7,429.84	56.30	56.70	114.73	-582.08	1,333.89	673.71	570.56	103.15	6.531	
8,800.00	7,148.00	9,091.25	7,429.74	59.00	59.38	114.68	-583.50	1,433.87	674.75	566.65	108.10	6.242	
8,900.00	7,148.00	9,191.24	7,429.64	61.72	62.09	114.63	-584.91	1,533.85	675.78	562.67	113.11	5.974	
9,000.00	7,148.00	9,291.23	7,429.54	64.47	64.83	114.58	-586.32	1,633.84	676.81	558.63	118.18	5.727	
9,100.00	7,148.00	9,391.22	7,429.44	67.25	67.60	114.53	-587.74	1,733.82	677.85	554.55	123.30	5.498	
9,200.00	7,148.00	9,491.22	7,429.34	70.04	70.38	114.48	-589.15	1,833.80	678.88	550.43	128.46	5.285	
9,300.00	7,148.00	9,591.21	7,429.24	72.86	73.19	114.43	-590.57	1,933.79	679.92	546.26	133.66	5.087	
9,400.00	7,148.00	9,691.20	7,429.14	75.69	76.01	114.39	-591.98	2,033.77	680.96	542.07	138.89	4.903	
9,500.00	7,148.00	9,791.20	7,429.04	78.53	78.85	114.34	-593.39	2,133.75	681.99	537.84	144.15	4.731	
9,600.00	7,148.00	9,891.19	7,428.94	81.39	81.70	114.29	-594.81	2,233.73	683.03	533.59	149.45	4.570	
9,700.00	7,148.00	9,991.18	7,428.84	84.26	84.56	114.24	-596.22	2,333.72	684.07	529.31	154.76	4.420	
9,800.00	7,148.00	10,091.18	7,428.74	87.14	87.44	114.19	-597.64	2,433.70	685.11	525.00	160.11	4.279	
9,900.00	7,148.00	10,191.17	7,428.64	90.03	90.32	114.14	-599.05	2,533.68	686.15	520.68	165.47	4.147	
10,000.00	7,148.00	10,291.16	7,428.54	92.93	93.22	114.10	-600.47	2,633.67	687.19	516.33	170.85	4.022	
10,100.00	7,148.00	10,391.15	7,428.44	95.84	96.12	114.05	-601.88	2,733.65	688.22	511.97	176.25	3.905	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #835H - OH - Plan #1											Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM											Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum		Separation	Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor
10,200.00	7,148.00	10,491.15	7,428.34	98.75	99.03	114.00	-603.29	2,833.63	689.27	507.59	181.67	3.794
10,300.00	7,148.00	10,591.14	7,428.24	101.67	101.95	113.95	-604.71	2,933.61	690.31	503.20	187.11	3.689
10,400.00	7,148.00	10,691.13	7,428.14	104.60	104.87	113.91	-606.12	3,033.60	691.35	498.79	192.56	3.590
10,500.00	7,148.00	10,791.13	7,428.04	107.53	107.80	113.86	-607.54	3,133.58	692.39	494.37	198.02	3.497
10,600.00	7,148.00	10,891.12	7,427.94	110.47	110.74	113.81	-608.95	3,233.56	693.43	489.93	203.50	3.408
10,700.00	7,148.00	10,991.11	7,427.84	113.41	113.68	113.76	-610.36	3,333.55	694.47	485.48	208.99	3.323
10,800.00	7,148.00	11,091.10	7,427.74	116.36	116.62	113.72	-611.78	3,433.53	695.52	481.03	214.49	3.243
10,900.00	7,148.00	11,191.10	7,427.64	119.31	119.57	113.67	-613.19	3,533.51	696.56	476.56	220.00	3.166
11,000.00	7,148.00	11,291.09	7,427.54	122.26	122.52	113.62	-614.61	3,633.49	697.60	472.08	225.52	3.093
11,100.00	7,148.00	11,391.08	7,427.44	125.22	125.48	113.58	-616.02	3,733.48	698.65	467.59	231.06	3.024
11,200.00	7,148.00	11,491.08	7,427.34	128.18	128.44	113.53	-617.43	3,833.46	699.69	463.10	236.60	2.957
11,300.00	7,148.00	11,591.07	7,427.24	131.14	131.41	113.49	-618.85	3,933.44	700.74	458.59	242.15	2.894
11,400.00	7,148.00	11,691.06	7,427.14	134.11	134.37	113.44	-620.26	4,033.43	701.78	454.08	247.71	2.833
11,500.00	7,148.00	11,791.06	7,427.04	137.08	137.34	113.39	-621.68	4,133.41	702.83	449.56	253.27	2.775
11,600.00	7,148.00	11,891.05	7,426.94	140.05	140.31	113.35	-623.09	4,233.39	703.88	445.03	258.85	2.719
11,700.00	7,148.00	11,991.04	7,426.84	143.03	143.29	113.30	-624.51	4,333.38	704.92	440.49	264.43	2.666
11,800.00	7,148.00	12,091.03	7,426.74	146.00	146.26	113.26	-625.92	4,433.36	705.97	435.95	270.02	2.615
11,900.00	7,148.00	12,191.03	7,426.64	148.98	149.24	113.21	-627.33	4,533.34	707.02	431.40	275.62	2.565
12,000.00	7,148.00	12,291.02	7,426.55	151.96	152.22	113.17	-628.75	4,633.32	708.07	426.85	281.22	2.518
12,100.00	7,148.00	12,391.01	7,426.45	154.94	155.21	113.12	-630.16	4,733.31	709.12	422.29	286.83	2.472
12,200.00	7,148.00	12,491.01	7,426.35	157.93	158.19	113.08	-631.58	4,833.29	710.17	417.72	292.44	2.428
12,300.00	7,148.00	12,591.00	7,426.25	160.91	161.18	113.03	-632.99	4,933.27	711.22	413.15	298.07	2.386
12,400.00	7,148.00	12,690.99	7,426.15	163.90	164.17	112.99	-634.40	5,033.26	712.27	408.57	303.69	2.345
12,500.00	7,148.00	12,790.98	7,426.05	166.89	167.15	112.94	-635.82	5,133.24	713.32	403.99	309.33	2.306
12,600.00	7,148.00	12,890.98	7,425.95	169.88	170.15	112.90	-637.23	5,233.22	714.37	399.40	314.97	2.268
12,700.00	7,148.00	12,990.97	7,425.85	172.87	173.14	112.85	-638.65	5,333.20	715.42	394.81	320.61	2.231
12,800.00	7,148.00	13,090.96	7,425.75	175.86	176.13	112.81	-640.06	5,433.19	716.47	390.21	326.26	2.196
12,900.00	7,148.00	13,190.96	7,425.65	178.86	179.13	112.77	-641.48	5,533.17	717.52	385.61	331.92	2.162
13,000.00	7,148.00	13,290.95	7,425.55	181.85	182.12	112.72	-642.89	5,633.15	718.58	381.00	337.57	2.129
13,100.00	7,148.00	13,390.94	7,425.45	184.85	185.12	112.68	-644.30	5,733.14	719.63	376.39	343.24	2.097
13,200.00	7,148.00	13,490.94	7,425.35	187.84	188.12	112.64	-645.72	5,833.12	720.68	371.77	348.91	2.066
13,300.00	7,148.00	13,590.93	7,425.25	190.84	191.12	112.59	-647.13	5,933.10	721.74	367.15	354.58	2.035
13,400.00	7,148.00	13,690.92	7,425.15	193.84	194.12	112.55	-648.55	6,033.08	722.79	362.53	360.26	2.006
13,500.00	7,148.00	13,790.91	7,425.05	196.84	197.12	112.51	-649.96	6,133.07	723.85	357.90	365.94	1.978
13,600.00	7,148.00	13,890.91	7,424.95	199.84	200.12	112.46	-651.37	6,233.05	724.90	353.27	371.63	1.951
13,700.00	7,148.00	13,990.90	7,424.85	202.84	203.12	112.42	-652.79	6,333.03	725.96	348.64	377.32	1.924
13,800.00	7,148.00	14,090.89	7,424.75	205.84	206.13	112.38	-654.20	6,433.02	727.01	344.00	383.02	1.898
13,900.00	7,148.00	14,190.89	7,424.65	208.84	209.13	112.33	-655.62	6,533.00	728.07	339.35	388.72	1.873
14,000.00	7,148.00	14,290.88	7,424.55	211.85	212.14	112.29	-657.03	6,632.98	729.13	334.71	394.42	1.849
14,100.00	7,148.00	14,390.87	7,424.45	214.85	215.14	112.25	-658.45	6,732.96	730.18	330.06	400.13	1.825
14,200.00	7,148.00	14,490.86	7,424.35	217.86	218.15	112.21	-659.86	6,832.95	731.24	325.40	405.84	1.802
14,300.00	7,148.00	14,590.86	7,424.25	220.86	221.16	112.16	-661.27	6,932.93	732.30	320.75	411.55	1.779
14,400.00	7,148.00	14,690.85	7,424.15	223.87	224.17	112.12	-662.69	7,032.91	733.36	316.09	417.27	1.758
14,500.00	7,148.00	14,790.84	7,424.05	226.87	227.17	112.08	-664.10	7,132.90	734.42	311.42	422.99	1.736
14,600.00	7,148.00	14,890.84	7,423.95	229.88	230.18	112.04	-665.52	7,232.88	735.48	306.76	428.72	1.716
14,700.00	7,148.00	14,990.83	7,423.85	232.89	233.19	112.00	-666.93	7,332.86	736.54	302.09	434.45	1.695
14,800.00	7,148.00	15,090.82	7,423.75	235.90	236.20	111.95	-668.34	7,432.85	737.60	297.42	440.18	1.676
14,900.00	7,148.00	15,190.82	7,423.65	238.90	239.21	111.91	-669.76	7,532.83	738.66	292.74	445.92	1.656
15,000.00	7,148.00	15,290.81	7,423.55	241.91	242.22	111.87	-671.17	7,632.81	739.72	288.06	451.65	1.638
15,100.00	7,148.00	15,390.80	7,423.45	244.92	245.24	111.83	-672.59	7,732.79	740.78	283.38	457.40	1.620
15,200.00	7,148.00	15,490.79	7,423.35	247.93	248.25	111.79	-674.00	7,832.78	741.84	278.70	463.14	1.602

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Offset Design Rosa Unit 42 - Rosa Unit #835H - OH - Plan #1													Offset Site Error: 0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
15,300.00	7,148.00	15,590.79	7,423.25	250.94	251.26	111.75	-675.41	7,932.76	742.90	274.01	468.89	1.584	
15,400.00	7,148.00	15,690.78	7,423.15	253.95	254.27	111.71	-676.83	8,032.74	743.96	269.32	474.64	1.567	
15,500.00	7,148.00	15,790.77	7,423.05	256.96	257.29	111.67	-678.24	8,132.73	745.03	264.63	480.40	1.551	
15,600.00	7,148.00	15,890.77	7,422.95	259.97	260.30	111.63	-679.66	8,232.71	746.09	259.93	486.16	1.535	
15,700.00	7,148.00	15,990.76	7,422.85	262.99	263.32	111.59	-681.07	8,332.69	747.15	255.23	491.92	1.519	
15,800.00	7,148.00	16,090.75	7,422.75	266.00	266.33	111.55	-682.49	8,432.67	748.22	250.53	497.68	1.503	
15,900.00	7,148.00	16,190.75	7,422.65	269.01	269.35	111.50	-683.90	8,532.66	749.28	245.83	503.45	1.488	Level 3
16,000.00	7,148.00	16,290.74	7,422.55	272.02	272.36	111.46	-685.31	8,632.64	750.35	241.12	509.22	1.474	Level 3
16,100.00	7,148.00	16,390.73	7,422.45	275.04	275.38	111.42	-686.73	8,732.62	751.41	236.41	515.00	1.459	Level 3
16,200.00	7,148.00	16,490.72	7,422.35	278.05	278.39	111.38	-688.14	8,832.61	752.48	231.70	520.77	1.445	Level 3
16,300.00	7,148.00	16,590.72	7,422.25	281.06	281.41	111.34	-689.56	8,932.59	753.54	226.99	526.55	1.431	Level 3
16,400.00	7,148.00	16,690.71	7,422.16	284.08	284.43	111.30	-690.97	9,032.57	754.61	222.27	532.33	1.418	Level 3
16,500.00	7,148.00	16,790.70	7,422.06	287.09	287.44	111.27	-692.38	9,132.55	755.67	217.56	538.12	1.404	Level 3
16,600.00	7,148.00	16,846.12	7,422.00	290.11	289.11	111.24	-693.18	9,187.97	758.06	216.46	541.60	1.400	Level 3, SF
16,700.00	7,148.00	16,846.12	7,422.00	293.12	289.11	111.24	-693.18	9,187.97	771.48	235.79	535.69	1.440	Level 3
16,800.00	7,148.00	16,846.12	7,422.00	296.14	289.11	111.24	-693.18	9,187.97	797.32	275.48	521.84	1.528	
16,900.00	7,148.00	16,846.12	7,422.00	299.15	289.11	111.24	-693.18	9,187.97	834.41	332.32	502.09	1.662	
17,000.00	7,148.00	16,846.12	7,422.00	302.17	289.11	111.24	-693.18	9,187.97	881.35	402.63	478.72	1.841	
17,044.78	7,148.00	16,846.12	7,422.00	303.52	289.11	111.24	-693.18	9,187.97	905.16	437.54	467.62	1.936	



Lonestar Consulting, LLC


Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Reference Depths are relative to WELL @ 6563.00ft (Original Well Elev)
 Offset Depths are relative to Offset Datum
 Central Meridian is -107.8333334

Coordinates are relative to: Rosa Unit #836H - Slot A2
 Coordinate System is US State Plane 1983, New Mexico Western Zone
 Grid Convergence at Surface is: 0.31°

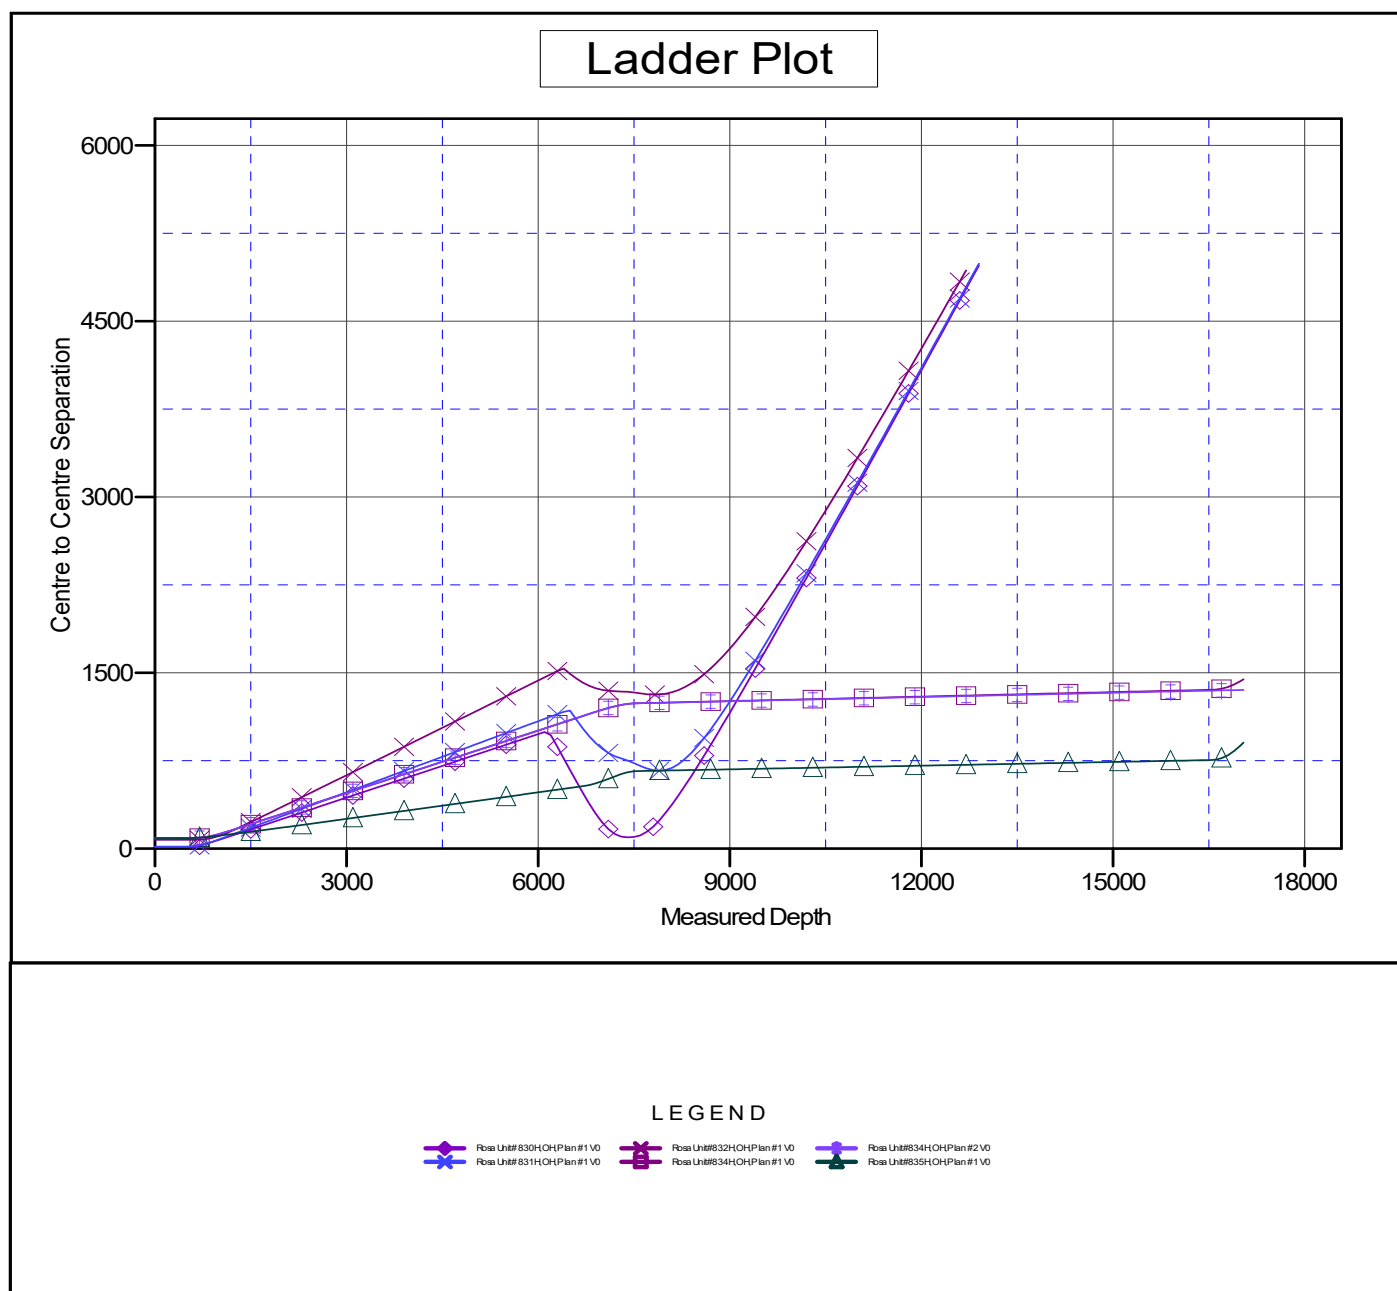

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	Logos Operating LLC	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Project:	Rio Arriba, NM NAD83	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Reference Site:	Rosa Unit 42	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Grand Junction
Reference Design:	Plan #2	Offset TVD Reference:	Reference Datum

Reference Depths are relative to WELL @ 6563.00ft (Original Well Elev)

Offset Depths are relative to Offset Datum


Central Meridian is -107.833334

Coordinates are relative to: Rosa Unit #836H - Slot A2


Coordinate System is US State Plane 1983, New Mexico Western Zone

Grid Convergence at Surface is: 0.31°

Separation Factor Plot

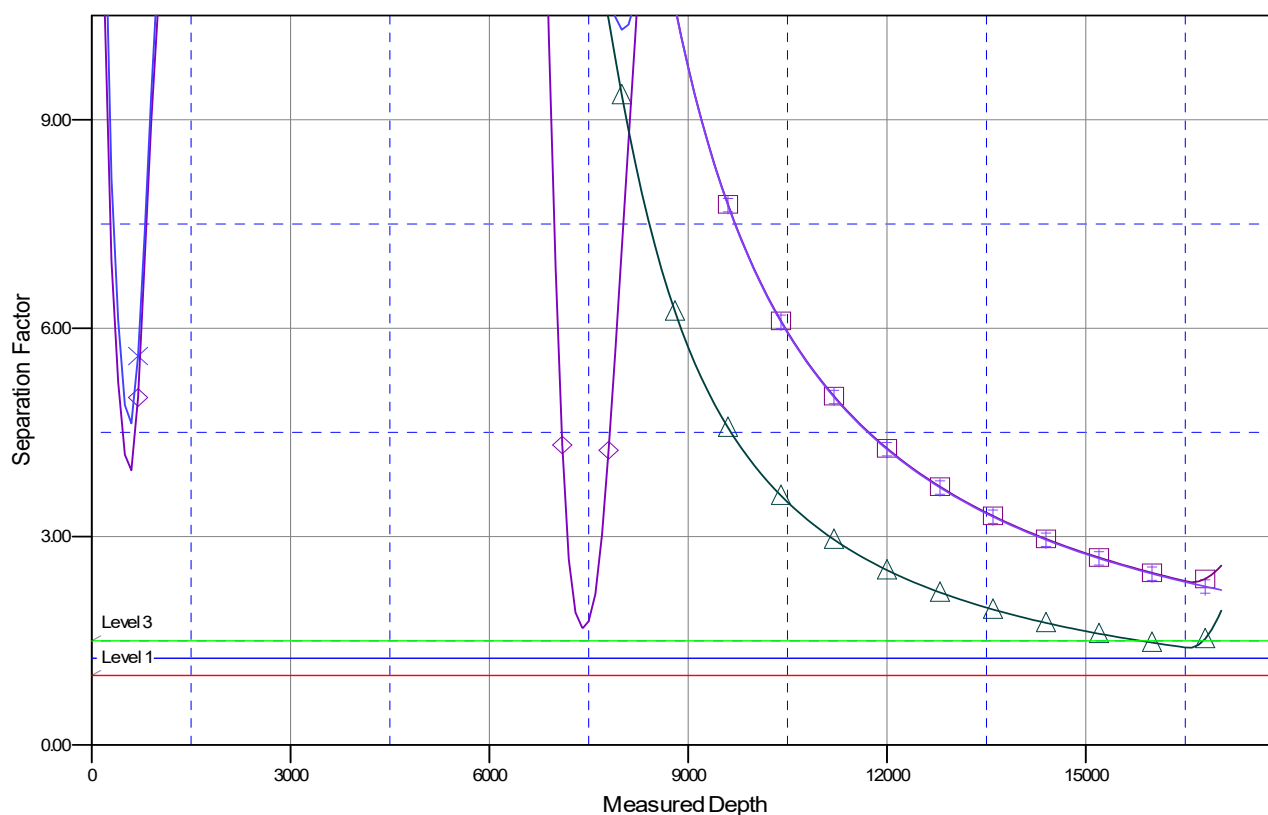

LEGEND





Company: Logos Operating LLC
Project: Rio Arriba, NM NAD83
Site: Rosa Unit 42
Well: Rosa Unit #836H
Wellbore: OH
Design: Plan #2

PROJECT DETAILS: Rio Arriba, NM NAD83

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Western Zone
System Datum: Mean Sea Level
Local North: True



WELL DETAILS: Rosa Unit #836H

WELL @ 6562.99usft (Original Well Elev)

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	
0.00	0.00	2133454.40	2872990.41	36.8618911	-107.3209230	A2

Plan: Plan #2 (Rosa Unit #836H/OH)

Created By: Janie Collins Date: 11:55, December 01 2021

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Rosa 836H POE	7147.99	32.49	171.94	2133487.82	2873162.18	36.8619803	-107.3203352
Rosa 836H BHL Rev 1	7147.99	10.52	9687.00	2133516.89	2882677.22	36.8619153	-107.2878099

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.000	500.00	0.00	0.00	0.00	0.00	0.00
726.69	4.53	273.772	726.45	0.59	-8.94	2.00	273.77	-8.94
6479.39	4.53	273.772	6461.15	30.50	-462.70	0.00	0.00	-462.66
7529.66	90.00	90.132	7147.99	32.49	171.94	9.00	176.35	171.98
17044.75	90.00	90.132	7147.99	10.52	9687.00	0.00	0.00	9687.01



Azimuths to True North
Magnetic North: 8.93°


Magnetic Field
Strength: 49655.0 nT
Dip Angle: 63.33°
Date: 7/26/2021
Model: HDGM2021_FIT

CASING DETAILS

No casing data is available

FORMATION DETAILS

TVDPath	MDPath	Formation
2731.99	2738.53	Ojo Alamo
2855.99	2862.92	Kirtland
3270.99	3279.22	Fruitland
3582.99	3592.20	Pictured Cliffs
3676.99	3686.49	Lewis
4776.99	4789.94	Chacra
5616.99	5632.58	Cliff House
5654.99	5670.70	Menefee
5851.99	5868.31	Point Lookout
6337.99	6355.84	Mancos

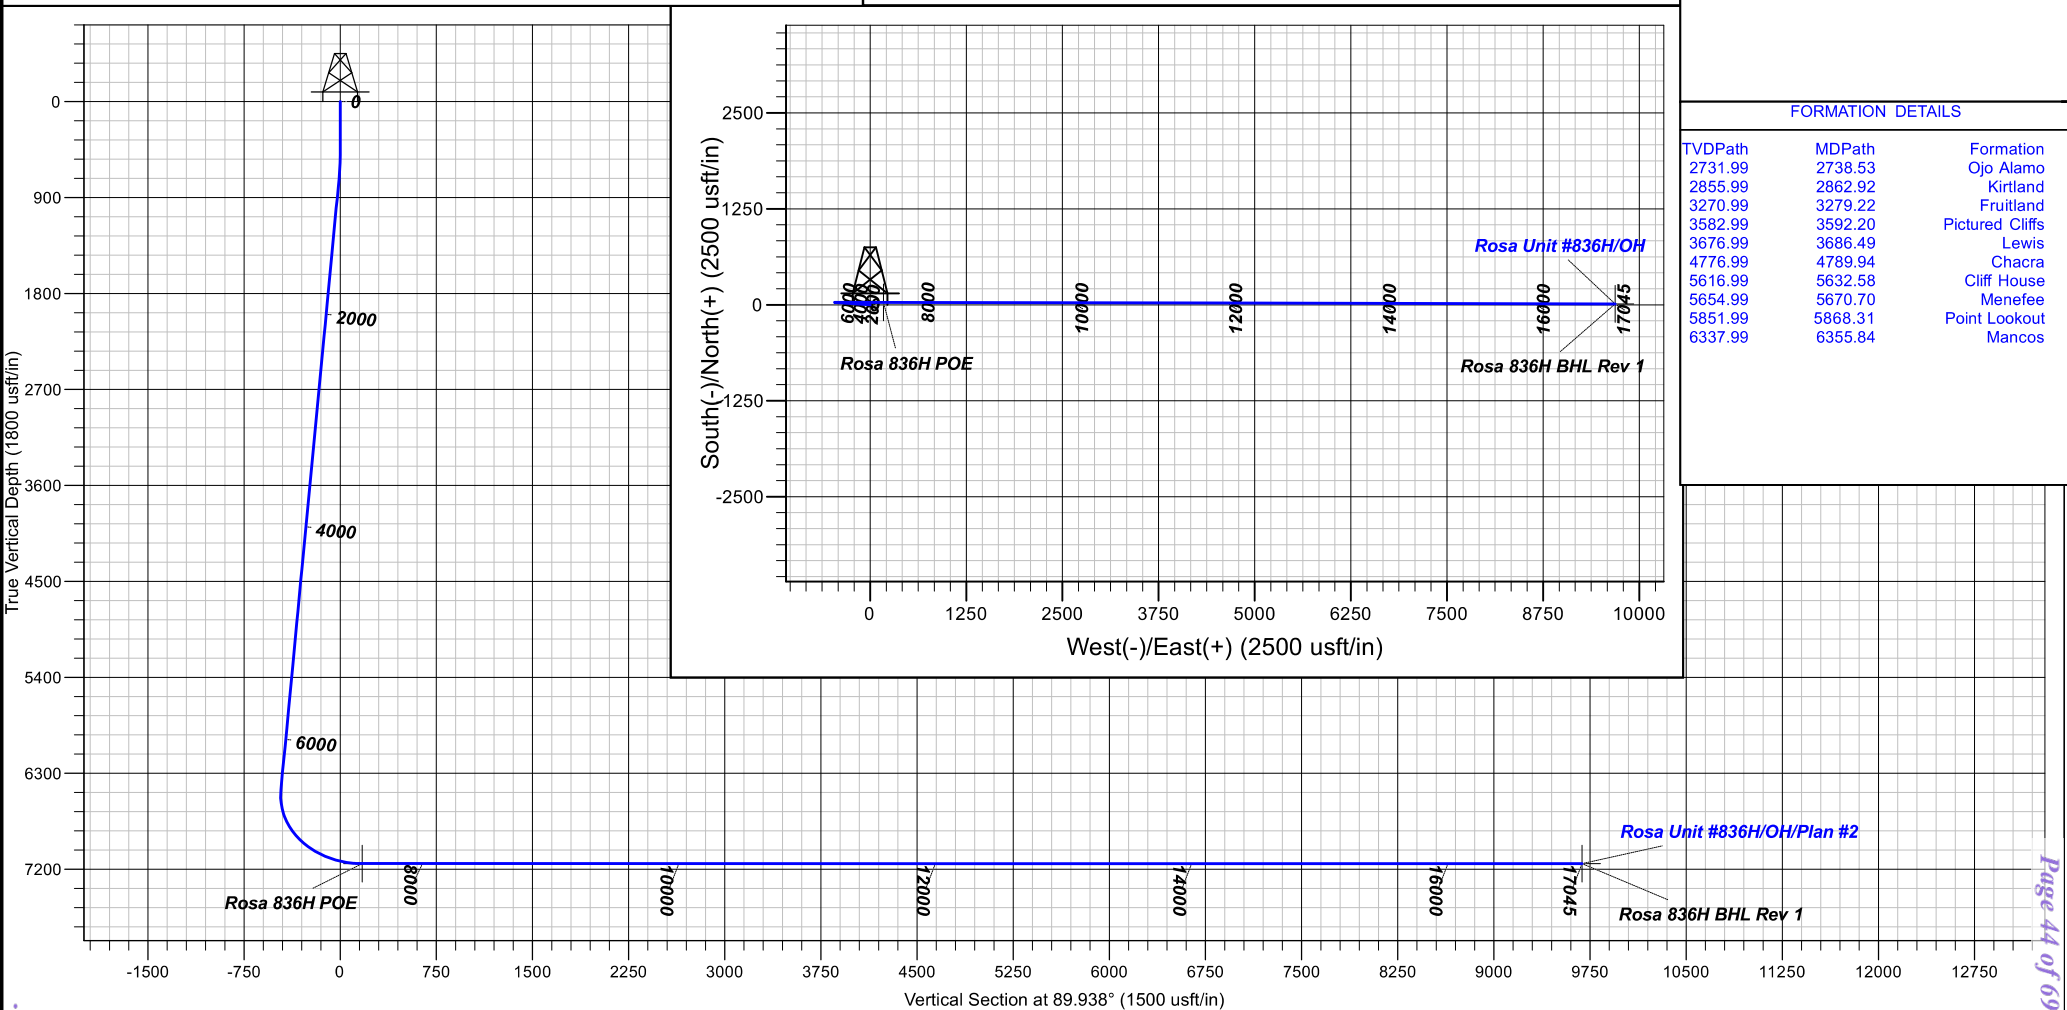



Logos Operating LLC

Rio Arriba, NM NAD83

Rosa Unit 42

Rosa Unit #836H - Slot A2

OH

Plan: Plan #2

Standard Planning Report

01 December, 2021





Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Company:	Logos Operating LLC	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Project:	Rio Arriba, NM NAD83	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site:	Rosa Unit 42	North Reference:	True
Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Project	Rio Arriba, NM NAD83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Rosa Unit 42				
Site Position:		Northing:	2,133,466.81 usft	Latitude:	36.8619250
From:	Lat/Long	Easting:	2,872,998.82 usft	Longitude:	-107.3208940
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence:	0.31

Well	Rosa Unit #836H - Slot A2					
Well Position	+N/-S	-12.36 ft	Northing:	2,133,454.40 usft	Latitude:	36.8618910
	+E/-W	-8.47 ft	Easting:	2,872,990.42 usft	Longitude:	-107.3209230
Position Uncertainty		0.00 ft	Wellhead Elevation:		Ground Level:	6,563.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2021_FILE	7/26/2021	8.58	63.35	49,655.30000000

Design	Plan #2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	89.94

Plan Survey Tool Program	Date	12/1/2021		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	17,044.78 Plan #2 (OH)	MWD+HDGM	
			OWSG MWD + HDGM	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
726.69	4.53	273.77	726.46	0.59	-8.94	2.00	2.00	0.00	273.77	
6,479.40	4.53	273.77	6,461.17	30.50	-462.70	0.00	0.00	0.00	0.00	
7,529.68	90.00	90.13	7,148.00	32.49	171.94	9.00	8.14	16.79	176.35	Rosa 836H POE
17,044.78	90.00	90.13	7,148.00	10.52	9,687.02	0.00	0.00	0.00	0.00	Rosa 836H BHL Rev



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Company:	Logos Operating LLC	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Project:	Rio Arriba, NM NAD83	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site:	Rosa Unit 42	North Reference:	True
Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	2.00	273.77	599.98	0.11	-1.74	-1.74	2.00	2.00	0.00
700.00	4.00	273.77	699.84	0.46	-6.96	-6.96	2.00	2.00	0.00
726.69	4.53	273.77	726.46	0.59	-8.94	-8.94	2.00	2.00	0.00
800.00	4.53	273.77	799.53	0.97	-14.73	-14.73	0.00	0.00	0.00
900.00	4.53	273.77	899.22	1.49	-22.61	-22.61	0.00	0.00	0.00
1,000.00	4.53	273.77	998.91	2.01	-30.50	-30.50	0.00	0.00	0.00
1,100.00	4.53	273.77	1,098.60	2.53	-38.39	-38.39	0.00	0.00	0.00
1,200.00	4.53	273.77	1,198.28	3.05	-46.28	-46.27	0.00	0.00	0.00
1,300.00	4.53	273.77	1,297.97	3.57	-54.17	-54.16	0.00	0.00	0.00
1,400.00	4.53	273.77	1,397.66	4.09	-62.05	-62.05	0.00	0.00	0.00
1,500.00	4.53	273.77	1,497.34	4.61	-69.94	-69.94	0.00	0.00	0.00
1,600.00	4.53	273.77	1,597.03	5.13	-77.83	-77.82	0.00	0.00	0.00
1,700.00	4.53	273.77	1,696.72	5.65	-85.72	-85.71	0.00	0.00	0.00
1,800.00	4.53	273.77	1,796.40	6.17	-93.60	-93.60	0.00	0.00	0.00
1,900.00	4.53	273.77	1,896.09	6.69	-101.49	-101.48	0.00	0.00	0.00
2,000.00	4.53	273.77	1,995.78	7.21	-109.38	-109.37	0.00	0.00	0.00
2,100.00	4.53	273.77	2,095.47	7.73	-117.27	-117.26	0.00	0.00	0.00
2,200.00	4.53	273.77	2,195.15	8.25	-125.15	-125.15	0.00	0.00	0.00
2,300.00	4.53	273.77	2,294.84	8.77	-133.04	-133.03	0.00	0.00	0.00
2,400.00	4.53	273.77	2,394.53	9.29	-140.93	-140.92	0.00	0.00	0.00
2,500.00	4.53	273.77	2,494.21	9.81	-148.82	-148.81	0.00	0.00	0.00
2,600.00	4.53	273.77	2,593.90	10.33	-156.71	-156.69	0.00	0.00	0.00
2,700.00	4.53	273.77	2,693.59	10.85	-164.59	-164.58	0.00	0.00	0.00
2,800.00	4.53	273.77	2,793.28	11.37	-172.48	-172.47	0.00	0.00	0.00
2,900.00	4.53	273.77	2,892.96	11.89	-180.37	-180.35	0.00	0.00	0.00
3,000.00	4.53	273.77	2,992.65	12.41	-188.26	-188.24	0.00	0.00	0.00
3,100.00	4.53	273.77	3,092.34	12.93	-196.14	-196.13	0.00	0.00	0.00
3,200.00	4.53	273.77	3,192.02	13.45	-204.03	-204.02	0.00	0.00	0.00
3,300.00	4.53	273.77	3,291.71	13.97	-211.92	-211.90	0.00	0.00	0.00
3,400.00	4.53	273.77	3,391.40	14.49	-219.81	-219.79	0.00	0.00	0.00
3,500.00	4.53	273.77	3,491.09	15.01	-227.69	-227.68	0.00	0.00	0.00
3,600.00	4.53	273.77	3,590.77	15.53	-235.58	-235.56	0.00	0.00	0.00
3,700.00	4.53	273.77	3,690.46	16.05	-243.47	-243.45	0.00	0.00	0.00
3,800.00	4.53	273.77	3,790.15	16.57	-251.36	-251.34	0.00	0.00	0.00
3,900.00	4.53	273.77	3,889.83	17.09	-259.24	-259.23	0.00	0.00	0.00
4,000.00	4.53	273.77	3,989.52	17.61	-267.13	-267.11	0.00	0.00	0.00
4,100.00	4.53	273.77	4,089.21	18.13	-275.02	-275.00	0.00	0.00	0.00
4,200.00	4.53	273.77	4,188.90	18.65	-282.91	-282.89	0.00	0.00	0.00
4,300.00	4.53	273.77	4,288.58	19.17	-290.80	-290.77	0.00	0.00	0.00
4,400.00	4.53	273.77	4,388.27	19.69	-298.68	-298.66	0.00	0.00	0.00
4,500.00	4.53	273.77	4,487.96	20.21	-306.57	-306.55	0.00	0.00	0.00
4,600.00	4.53	273.77	4,587.64	20.73	-314.46	-314.44	0.00	0.00	0.00
4,700.00	4.53	273.77	4,687.33	21.25	-322.35	-322.32	0.00	0.00	0.00
4,800.00	4.53	273.77	4,787.02	21.77	-330.23	-330.21	0.00	0.00	0.00
4,900.00	4.53	273.77	4,886.70	22.29	-338.12	-338.10	0.00	0.00	0.00
5,000.00	4.53	273.77	4,986.39	22.81	-346.01	-345.98	0.00	0.00	0.00
5,100.00	4.53	273.77	5,086.08	23.33	-353.90	-353.87	0.00	0.00	0.00



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Company:	Logos Operating LLC	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Project:	Rio Arriba, NM NAD83	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site:	Rosa Unit 42	North Reference:	True
Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,200.00	4.53	273.77	5,185.77	23.85	-361.78	-361.76	0.00	0.00	0.00	
5,300.00	4.53	273.77	5,285.45	24.37	-369.67	-369.64	0.00	0.00	0.00	
5,400.00	4.53	273.77	5,385.14	24.89	-377.56	-377.53	0.00	0.00	0.00	
5,500.00	4.53	273.77	5,484.83	25.41	-385.45	-385.42	0.00	0.00	0.00	
5,600.00	4.53	273.77	5,584.51	25.93	-393.33	-393.31	0.00	0.00	0.00	
5,700.00	4.53	273.77	5,684.20	26.45	-401.22	-401.19	0.00	0.00	0.00	
5,800.00	4.53	273.77	5,783.89	26.97	-409.11	-409.08	0.00	0.00	0.00	
5,900.00	4.53	273.77	5,883.58	27.49	-417.00	-416.97	0.00	0.00	0.00	
6,000.00	4.53	273.77	5,983.26	28.01	-424.89	-424.85	0.00	0.00	0.00	
6,100.00	4.53	273.77	6,082.95	28.53	-432.77	-432.74	0.00	0.00	0.00	
6,200.00	4.53	273.77	6,182.64	29.05	-440.66	-440.63	0.00	0.00	0.00	
6,300.00	4.53	273.77	6,282.32	29.57	-448.55	-448.52	0.00	0.00	0.00	
6,400.00	4.53	273.77	6,382.01	30.09	-456.44	-456.40	0.00	0.00	0.00	
6,479.40	4.53	273.77	6,461.17	30.50	-462.70	-462.67	0.00	0.00	0.00	
6,500.00	2.69	276.29	6,481.72	30.61	-463.99	-463.96	9.00	-8.97	12.23	
6,600.00	6.34	87.53	6,581.57	31.10	-460.80	-460.77	9.00	3.65	171.24	
6,700.00	15.33	89.08	6,679.68	31.55	-442.03	-442.00	9.00	9.00	1.55	
6,800.00	24.33	89.49	6,773.66	31.95	-408.14	-408.11	9.00	9.00	0.41	
6,900.00	33.33	89.69	6,861.17	32.28	-359.97	-359.94	9.00	9.00	0.20	
7,000.00	42.33	89.82	6,940.07	32.53	-298.71	-298.67	9.00	9.00	0.12	
7,100.00	51.33	89.90	7,008.42	32.71	-225.85	-225.81	9.00	9.00	0.09	
7,200.00	60.33	89.97	7,064.53	32.80	-143.20	-143.16	9.00	9.00	0.07	
7,300.00	69.33	90.02	7,107.02	32.81	-52.79	-52.75	9.00	9.00	0.06	
7,400.00	78.33	90.07	7,134.84	32.72	43.16	43.19	9.00	9.00	0.05	
7,500.00	87.33	90.12	7,147.31	32.56	142.28	142.31	9.00	9.00	0.05	
7,529.68	90.00	90.13	7,148.00	32.49	171.94	171.98	9.00	9.00	0.05	
7,600.00	90.00	90.13	7,148.00	32.33	242.26	242.30	0.00	0.00	0.00	
7,700.00	90.00	90.13	7,148.00	32.10	342.26	342.30	0.00	0.00	0.00	
7,800.00	90.00	90.13	7,148.00	31.87	442.26	442.30	0.00	0.00	0.00	
7,900.00	90.00	90.13	7,148.00	31.64	542.26	542.30	0.00	0.00	0.00	
8,000.00	90.00	90.13	7,148.00	31.41	642.26	642.30	0.00	0.00	0.00	
8,100.00	90.00	90.13	7,148.00	31.18	742.26	742.30	0.00	0.00	0.00	
8,200.00	90.00	90.13	7,148.00	30.95	842.26	842.30	0.00	0.00	0.00	
8,300.00	90.00	90.13	7,148.00	30.71	942.26	942.29	0.00	0.00	0.00	
8,400.00	90.00	90.13	7,148.00	30.48	1,042.26	1,042.29	0.00	0.00	0.00	
8,500.00	90.00	90.13	7,148.00	30.25	1,142.26	1,142.29	0.00	0.00	0.00	
8,600.00	90.00	90.13	7,148.00	30.02	1,242.26	1,242.29	0.00	0.00	0.00	
8,700.00	90.00	90.13	7,148.00	29.79	1,342.26	1,342.29	0.00	0.00	0.00	
8,800.00	90.00	90.13	7,148.00	29.56	1,442.26	1,442.29	0.00	0.00	0.00	
8,900.00	90.00	90.13	7,148.00	29.33	1,542.26	1,542.29	0.00	0.00	0.00	
9,000.00	90.00	90.13	7,148.00	29.10	1,642.26	1,642.29	0.00	0.00	0.00	
9,100.00	90.00	90.13	7,148.00	28.87	1,742.26	1,742.29	0.00	0.00	0.00	
9,200.00	90.00	90.13	7,148.00	28.64	1,842.26	1,842.29	0.00	0.00	0.00	
9,300.00	90.00	90.13	7,148.00	28.40	1,942.26	1,942.29	0.00	0.00	0.00	
9,400.00	90.00	90.13	7,148.00	28.17	2,042.26	2,042.29	0.00	0.00	0.00	
9,500.00	90.00	90.13	7,148.00	27.94	2,142.26	2,142.29	0.00	0.00	0.00	
9,600.00	90.00	90.13	7,148.00	27.71	2,242.26	2,242.29	0.00	0.00	0.00	
9,700.00	90.00	90.13	7,148.00	27.48	2,342.26	2,342.29	0.00	0.00	0.00	
9,800.00	90.00	90.13	7,148.00	27.25	2,442.26	2,442.29	0.00	0.00	0.00	
9,900.00	90.00	90.13	7,148.00	27.02	2,542.26	2,542.29	0.00	0.00	0.00	
10,000.00	90.00	90.13	7,148.00	26.79	2,642.26	2,642.29	0.00	0.00	0.00	
10,100.00	90.00	90.13	7,148.00	26.56	2,742.26	2,742.28	0.00	0.00	0.00	
10,200.00	90.00	90.13	7,148.00	26.33	2,842.26	2,842.28	0.00	0.00	0.00	



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Company:	Logos Operating LLC	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Project:	Rio Arriba, NM NAD83	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site:	Rosa Unit 42	North Reference:	True
Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
10,300.00	90.00	90.13	7,148.00	26.10	2,942.26	2,942.28	0.00	0.00	0.00	
10,400.00	90.00	90.13	7,148.00	25.86	3,042.26	3,042.28	0.00	0.00	0.00	
10,500.00	90.00	90.13	7,148.00	25.63	3,142.26	3,142.28	0.00	0.00	0.00	
10,600.00	90.00	90.13	7,148.00	25.40	3,242.26	3,242.28	0.00	0.00	0.00	
10,700.00	90.00	90.13	7,148.00	25.17	3,342.26	3,342.28	0.00	0.00	0.00	
10,800.00	90.00	90.13	7,148.00	24.94	3,442.26	3,442.28	0.00	0.00	0.00	
10,900.00	90.00	90.13	7,148.00	24.71	3,542.26	3,542.28	0.00	0.00	0.00	
11,000.00	90.00	90.13	7,148.00	24.48	3,642.26	3,642.28	0.00	0.00	0.00	
11,100.00	90.00	90.13	7,148.00	24.25	3,742.25	3,742.28	0.00	0.00	0.00	
11,200.00	90.00	90.13	7,148.00	24.02	3,842.25	3,842.28	0.00	0.00	0.00	
11,300.00	90.00	90.13	7,148.00	23.79	3,942.25	3,942.28	0.00	0.00	0.00	
11,400.00	90.00	90.13	7,148.00	23.55	4,042.25	4,042.28	0.00	0.00	0.00	
11,500.00	90.00	90.13	7,148.00	23.32	4,142.25	4,142.28	0.00	0.00	0.00	
11,600.00	90.00	90.13	7,148.00	23.09	4,242.25	4,242.28	0.00	0.00	0.00	
11,700.00	90.00	90.13	7,148.00	22.86	4,342.25	4,342.28	0.00	0.00	0.00	
11,800.00	90.00	90.13	7,148.00	22.63	4,442.25	4,442.27	0.00	0.00	0.00	
11,900.00	90.00	90.13	7,148.00	22.40	4,542.25	4,542.27	0.00	0.00	0.00	
12,000.00	90.00	90.13	7,148.00	22.17	4,642.25	4,642.27	0.00	0.00	0.00	
12,100.00	90.00	90.13	7,148.00	21.94	4,742.25	4,742.27	0.00	0.00	0.00	
12,200.00	90.00	90.13	7,148.00	21.71	4,842.25	4,842.27	0.00	0.00	0.00	
12,300.00	90.00	90.13	7,148.00	21.48	4,942.25	4,942.27	0.00	0.00	0.00	
12,400.00	90.00	90.13	7,148.00	21.25	5,042.25	5,042.27	0.00	0.00	0.00	
12,500.00	90.00	90.13	7,148.00	21.01	5,142.25	5,142.27	0.00	0.00	0.00	
12,600.00	90.00	90.13	7,148.00	20.78	5,242.25	5,242.27	0.00	0.00	0.00	
12,700.00	90.00	90.13	7,148.00	20.55	5,342.25	5,342.27	0.00	0.00	0.00	
12,800.00	90.00	90.13	7,148.00	20.32	5,442.25	5,442.27	0.00	0.00	0.00	
12,900.00	90.00	90.13	7,148.00	20.09	5,542.25	5,542.27	0.00	0.00	0.00	
13,000.00	90.00	90.13	7,148.00	19.86	5,642.25	5,642.27	0.00	0.00	0.00	
13,100.00	90.00	90.13	7,148.00	19.63	5,742.25	5,742.27	0.00	0.00	0.00	
13,200.00	90.00	90.13	7,148.00	19.40	5,842.25	5,842.27	0.00	0.00	0.00	
13,300.00	90.00	90.13	7,148.00	19.17	5,942.25	5,942.27	0.00	0.00	0.00	
13,400.00	90.00	90.13	7,148.00	18.94	6,042.25	6,042.27	0.00	0.00	0.00	
13,500.00	90.00	90.13	7,148.00	18.70	6,142.25	6,142.27	0.00	0.00	0.00	
13,600.00	90.00	90.13	7,148.00	18.47	6,242.25	6,242.26	0.00	0.00	0.00	
13,700.00	90.00	90.13	7,148.00	18.24	6,342.25	6,342.26	0.00	0.00	0.00	
13,800.00	90.00	90.13	7,148.00	18.01	6,442.25	6,442.26	0.00	0.00	0.00	
13,900.00	90.00	90.13	7,148.00	17.78	6,542.25	6,542.26	0.00	0.00	0.00	
14,000.00	90.00	90.13	7,148.00	17.55	6,642.25	6,642.26	0.00	0.00	0.00	
14,100.00	90.00	90.13	7,148.00	17.32	6,742.25	6,742.26	0.00	0.00	0.00	
14,200.00	90.00	90.13	7,148.00	17.09	6,842.25	6,842.26	0.00	0.00	0.00	
14,300.00	90.00	90.13	7,148.00	16.86	6,942.25	6,942.26	0.00	0.00	0.00	
14,400.00	90.00	90.13	7,148.00	16.63	7,042.25	7,042.26	0.00	0.00	0.00	
14,500.00	90.00	90.13	7,148.00	16.40	7,142.25	7,142.26	0.00	0.00	0.00	
14,600.00	90.00	90.13	7,148.00	16.16	7,242.25	7,242.26	0.00	0.00	0.00	
14,700.00	90.00	90.13	7,148.00	15.93	7,342.25	7,342.26	0.00	0.00	0.00	
14,800.00	90.00	90.13	7,148.00	15.70	7,442.24	7,442.26	0.00	0.00	0.00	
14,900.00	90.00	90.13	7,148.00	15.47	7,542.24	7,542.26	0.00	0.00	0.00	
15,000.00	90.00	90.13	7,148.00	15.24	7,642.24	7,642.26	0.00	0.00	0.00	
15,100.00	90.00	90.13	7,148.00	15.01	7,742.24	7,742.26	0.00	0.00	0.00	
15,200.00	90.00	90.13	7,148.00	14.78	7,842.24	7,842.26	0.00	0.00	0.00	
15,300.00	90.00	90.13	7,148.00	14.55	7,942.24	7,942.25	0.00	0.00	0.00	
15,400.00	90.00	90.13	7,148.00	14.32	8,042.24	8,042.25	0.00	0.00	0.00	
15,500.00	90.00	90.13	7,148.00	14.09	8,142.24	8,142.25	0.00	0.00	0.00	



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference	Well Rosa Unit #836H - Slot A2
Company:	Logos Operating LLC	TVD Reference:	WELL @ 6563.00ft (Original Well Elev)
Project:	Rio Arriba, NM NAD83	MD Reference:	WELL @ 6563.00ft (Original Well Elev)
Site:	Rosa Unit 42	North Reference:	True
Well:	Rosa Unit #836H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
15,600.00	90.00	90.13	7,148.00	13.85	8,242.24	8,242.25	0.00	0.00	0.00	
15,700.00	90.00	90.13	7,148.00	13.62	8,342.24	8,342.25	0.00	0.00	0.00	
15,800.00	90.00	90.13	7,148.00	13.39	8,442.24	8,442.25	0.00	0.00	0.00	
15,900.00	90.00	90.13	7,148.00	13.16	8,542.24	8,542.25	0.00	0.00	0.00	
16,000.00	90.00	90.13	7,148.00	12.93	8,642.24	8,642.25	0.00	0.00	0.00	
16,100.00	90.00	90.13	7,148.00	12.70	8,742.24	8,742.25	0.00	0.00	0.00	
16,200.00	90.00	90.13	7,148.00	12.47	8,842.24	8,842.25	0.00	0.00	0.00	
16,300.00	90.00	90.13	7,148.00	12.24	8,942.24	8,942.25	0.00	0.00	0.00	
16,400.00	90.00	90.13	7,148.00	12.01	9,042.24	9,042.25	0.00	0.00	0.00	
16,500.00	90.00	90.13	7,148.00	11.78	9,142.24	9,142.25	0.00	0.00	0.00	
16,600.00	90.00	90.13	7,148.00	11.55	9,242.24	9,242.25	0.00	0.00	0.00	
16,700.00	90.00	90.13	7,148.00	11.31	9,342.24	9,342.25	0.00	0.00	0.00	
16,800.00	90.00	90.13	7,148.00	11.08	9,442.24	9,442.25	0.00	0.00	0.00	
16,900.00	90.00	90.13	7,148.00	10.85	9,542.24	9,542.25	0.00	0.00	0.00	
17,000.00	90.00	90.13	7,148.00	10.62	9,642.24	9,642.25	0.00	0.00	0.00	
17,044.78	90.00	90.13	7,148.00	10.52	9,687.02	9,687.03	0.00	0.00	0.00	

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
Rosa 836H POE	0.00	0.00	7,148.00	32.49	171.94	2,133,487.82	2,873,162.18	36.8619803	-107.3203352
- plan hits target center									
- Point									
Rosa 836H BHL Rev 1	0.00	0.00	7,148.00	10.52	9,687.02	2,133,516.89	2,882,677.22	36.8619153	-107.2878100
- plan hits target center									
- Point									

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
2,738.53	2,732.00	Ojo Alamo		0.00	0.00	
2,862.92	2,856.00	Kirtland		0.00	0.00	
3,279.22	3,271.00	Fruitland		0.00	0.00	
3,592.20	3,583.00	Pictured Cliffs		0.00	0.00	
3,686.50	3,677.00	Lewis		0.00	0.00	
4,789.95	4,777.00	Chacra		0.00	0.00	
5,632.59	5,617.00	Cliff House		0.00	0.00	
5,670.71	5,655.00	Menefee		0.00	0.00	
5,868.33	5,852.00	Point Lookout		0.00	0.00	
6,355.85	6,338.00	Mancos		0.00	0.00	



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Farmington District Office
6251 College Blvd, Suite A
Farmington, New Mexico 87402



In Reply Refer To:
3162.3-1(NMF0110)

Logos Operating LLC
#836H Rosa Unit
Lease: NMSF78768 Unit: NMNM78407E
SH: NW¼NW¼ Section 36, T.31 N., R.5 W.
BH: NE¼NE¼ Section 31, T.31 N., R.4 W.
Rio Arriba County, New Mexico

***Above Data Required on Well Sign**

GENERAL REQUIREMENTS FOR OIL AND GAS OPERATIONS ON FEDERAL AND INDIAN LEASES

The following special requirements apply and are effective when **checked**:

- A. ☒ Note all surface/drilling conditions of approval attached.
- B. ☒ The required wait on cement (WOC) time will be a minimum of 500 psi compressive strength at 60 degrees. Blowout preventor (BOP) nipple-up operations may then be initiated
- C. ☐ Test the surface casing to a minimum of _____ psi for 30 minutes.
- D. ☐ Test all casing strings below the surface casing to .22 psi/ft. of casing string length or 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield burst) for a minimum of 30 minutes.
- E. ☐ Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the Bureau of Land Management, New Mexico State Office, Reservoir Management Group, 301 Dinosaur Trail, Santa Fe, New Mexico 87508.
The effective date of the agreement must be **prior** to any sales.

INTERIOR REGION 7 • UPPER COLORADO BASIN

COLORADO, NEW MEXICO, UTAH, WYOMING

- F. ☐ The use of co-flex hose is authorized contingent upon the following:
1. From the BOP to the choke manifold: the co-flex hose must be hobbled on both ends and saddle to prevent whip.
 2. From the choke manifold to the discharge tank: the co-flex hoses must be as straight as practical, hobbled on both ends and anchored to prevent whip.
 3. The co-flex hose pressure rating must be at least commensurate with approved BOPE.

I. GENERAL

- A. Full compliance with all applicable laws, regulations, and Onshore Orders, with the approved Permit to drill, and with the approved Surface Use and Operations Plan is required. Lessees and/or operators are fully accountable for the actions of their contractors and subcontractors. Failure to comply with these requirements and the filing of required reports will result in strict enforcement pursuant to 43 CFR 3163.1 or 3163.2.
- B. Each well shall have a well sign in legible condition from spud date to final abandonment. The sign should show the operator's name, lease serial number, or unit name, well number, location of the well, and whether lease is Tribal or Allotted, (See 43 CFR 3162.6(b)).
- C. A complete copy of the approved Application for Permit to Drill, along with any conditions of approval, shall be available to authorized personnel at the drill site whenever active drilling operations are under way.
- E. As soon as practical, notice is required of all blowouts, fires and accidents involving life-threatening injuries or loss of life. (See NTL-3A).
- F. Prior approval by the BLM-Authorized Office (Drilling and Production Section) is required for variance from the approved drilling program and before commencing plugging operations, plug back work casing repair work, corrective cementing operations, or suspending drilling operations indefinitely. Emergency approval may be obtained orally, but such approval is contingent upon filing of a notice of intent (on a Sundry Notice, Form 3160-5) within three business days (original and three copies of Federal leases and an original and four copies on Indian leases). **Any changes to the approved plan or any questions regarding drilling operations should be directed to BLM during regular business hours at 505-564-7600. Emergency program changes after hours should be directed to at Virgil Lucero at 505-793-1836.**
- G. **The Inspection and Enforcement Section (I&E), phone number (505-564-7750) is to be notified at least 24 hours in advance of BOP test, spudding, cementing, or plugging operations so that a BLM representative may witness the operations.**
- H. Unless drilling operations are commenced within two years, approval of the Application for Permit to Drill will expire. A written request for a two years extension may be granted if submitted prior to expiration.
- I. From the time drilling operations are initiated and until drilling operations are completed, a member of the drilling crew or the tool pusher shall maintain rig surveillance at all time, unless the well is secured with blowout preventers or cement plugs.

- J. If for any reason, drilling operations are suspended for more than 90 days, a written notice must be provided to this office outlining your plans for this well.

II. REPORTING REQUIREMENTS

A. For reporting purposes, all well Sundry notices, well completion and other well actions shall be referenced by the appropriate lease, communitization agreement and/or unit agreement numbers.

B. The following reports shall be filed with the BLM-Authorized Officer within 30 days after the work is completed.

1. Original and three copies on Federal and an Original and five copies on Indian leases of Sundry Notice (Form 3150-5), giving complete information concerning.

- a. Setting of each string of casing. Show size and depth of hole, grade and weight of casing, depth set, depth of any and all cementing tools that are used, amount (in cubic feet) and types of cement used, whether cement circulated to surface and all cement tops in the casing annulus, casing test method and results, and the date work was done. Show spud date on first report submitted.
 - b. Intervals tested, perforated (include; size, number and location of perforations), acidized, or fractured; and results obtained. Provide date work was done on well completion report and completion sundry notice.
 - c. Subsequent Report of Abandonment, show the manner in which the well was plugged, including depths where casing was cut and pulled, intervals (by depths) where cement plugs were replaced, and dates of the operations.
2. Well Completion Report (Form 3160-4) will be submitted with 30 days after well has been completed.
- a. Initial Bottom Hole Pressure (BHP) for the producing formations. Show the BHP on the completion report. The pressure may be: 1) measured with a bottom hole bomb, or; 2) calculated based on shut in surface pressures (minimum seven day buildup) and fluid level shot.

3. Submit a cement evaluation log, if cement is not circulated to surface.

III. DRILLER'S LOG

The following shall be entered in the daily driller's log: 1) Blowout preventer pressures tests, including test pressures and results. 2) Blowout preventer tests for proper functioning, 3) Blowout prevention drills conducted, 4) Casing run, including size, grade, weight, and depth set, 5) How pipe was cemented, including amount of cement, type, whether cement circulated to surface, location of cementing tools, etc., 6) Waiting on cement time for each casing string, 7) Casing pressure tests after cementing, including test pressure and results and 8) Estimated amounts of oil and gas recovered and/or produced during drill stem test.

IV. GAS FLARING

Gas produced from this well may not be vented or flared beyond an initial, authorized test period of *** Days** or 50 MMCF following its (completion)(recompletion), whichever first occurs, without the prior, written approval of the authorized officer. Should gas be vented or flared without approval beyond the test period authorized above, you may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted. You shall be required to compensate the lessor for the portion of the gas vented or flared without approval which is determined to have been avoidably lost.

***30 days**, unless a longer test period is specifically approved by the authorized officer. The 30-day period will commence upon the first gas to surface.

V. SAFETY

- A. All rig heating stoves are to be of the explosion-proof type.
- B. Rig safety lines are to be installed.
- C. Hard hats and other Personal Protective Equipment (PPE) must be utilized.

VI. CHANGE OF PLANS OR ABANDONMENT

- A. Any changes of plans required in order to mitigate unanticipated conditions encountered during drilling operations, will require approval as set forth in Section 1.F.
- B. If the well is dry, it is to be plugged in accordance with 43 CFR 3162.3-4, approval of the proposed plugging program is required as set forth in Section 1.F. The report should show the total depth reached, the reason for plugging, and the proposed intervals, by depths, where cement plugs are to be placed, type of plugging mud, etc. A Subsequent Report of Abandonment is required as set forth in Section II.B.1c.
- C. Unless a well has been properly cased and cemented, or properly plugged, the drilling rig must not be moved from the drill site without prior approval from the BLM-Authorized Officer.

VII. PHONE NUMBERS

- A. For BOPE tests, cementing, and plugging operations the phone number is 505-564-7750 and must be called 24 hours in advance in order that a BLM representative may witness the operations.
- B. Emergency program changes after hours contact:

Virgil Lucero (505) 793-1836
BLM 24 Hour Number (505) 564-7750



Jicarilla Ranger District, Carson National Forest
Energy Policy Act, Section 390 Review & Decision Form

Project Title: WPX Energy Production, LLC Proposed Well Pads and Ancillary Facilities
PALS #: 51676

FS Decision Date: 08/01/2017

Archeological Clearance Date: 04/12/2017

Wildlife Report Date: 05/03/2017

Comments: See Figures 1 and 2 for project overview and attached location and pipeline plats for approved project areas.

PROPOSED PROJECT INFORMATION

Operator: WPX Energy LLC

Well/Pad Name(s) and Number(s): Pad #42 and all included wells, (See Figure 1)

Proposed Well(s): ☐ New ☒ Twinned ☐ Other _____

Surface Ownership: USDA – Forest Service

Well Location: Township 31 N; Range 5 W; Section 36

Ancillary Facilities Location: Township _____ N; Range _____ W; Section(s) _____

Facility Type: _____

Formation: Basin Mancos

6th Code Watershed: 140801010902 Cabresto Canyon

Refer to plat for additional information regarding project location and layout

OTHER SECTION 390 PROJECTS

Operator: _____

Project Name: _____

Location: Township _____ N; Range _____ W; Section(s) _____

Comments: _____

LEASE TERMS & CONDITIONSLease No. **NMSF 0078768****Exceptions to Standard Lease Terms & Stipulations (if applicable)**☐ No Surface Occupancy (NSO) Stipulation☐ Controlled Surface Use Stipulation☐ Timing Restriction☐ Cultural Resource Lease Notice☐ Other: _____

Comments: _____

ONSITE**1. Onsite Date 11/14/2016**

Representatives/Attendees:

<u>Forest Service</u>	<u>Company</u>	<u>Other</u>
J.J. Miller	Mark Lepitch	Mindy Paulek
	Debbie Watson	Casey Haga
		Steve Fuller
		Elliot Ryan

2. Surface Disturbance on National Forest System (NFS) lands:Access Road Length: 56.5 feet Access Road Width: 50 feet (Total road/pipeline corridor)Pad Size: 655 x 410 feet (approximate size, includes construction zone)Estimated maximum cut: 7.0 feet Estimated maximum fill: 5.0 feetEstimated New Ground Disturbance: 6.23 acresComments: **See Figure 1 for total surface disturbance.****3. Archeology:**☒ Negative Survey ☐ Refer to Archeological Record of Review for Stipulations☐ Additional Fieldwork required

Comments: _____

4. Wildlife (Refer to Wildlife Specialist Report for Additional Information):

Winter Wildlife Areas

Yes	No	N/A	Item
☒	☐	☐	1. Proposal is within Primary Big Game Winter Range.
☒	☐	☐	2. Proposal is within Big Game Winter Range.

Mexican Spotted Owl

Yes	No	N/A	Item
☐	☒	☐	1. Proposal is within or is within ½-mile of PAC.
☐	☒	☐	2. Proposal is within or is within ½-mile of Designated Critical Habitat.
☐	☒	☐	2. Proposal is within or is within ½-mile of –Potential MSO Habitat.

Management Indicator Species (MIS)

Species checked are the MIS for the proposed project

☐ Hairy Woodpecker	☐ Turkey
☐ Brewer's Sparrow	☐ Abert's Squirrel
☒ Juniper (Plain) Titmouse	☒ Elk

Threatened, Endangered, and Forest Service Sensitive Species:

TES Species	No Surveys Needed	Survey Completed	Survey Required	Mitigation Required	Not In or Near Suitable Habitat
Mexican Spotted Owl	☒	☐	☐	☐	☒
Black-footed Ferret	☒	☐	☐	☐	☒
Apache Northern Goshawk	☒	☐	☐	☐	☒
American Peregrine Falcon	☒	☐	☐	☐	☒
Bald Eagle	☒	☐	☐	☐	☒
Grey Vireo	☒	☐	☐	☐	☐
Townsend's Big-Eared Bat	☒	☐	☐	☐	☐
Spotted Bat	☒	☐	☐	☐	☐
Burrowing Owl	☒	☐	☐	☐	☒
Gunnison's Prairie Dog	☒	☐	☐	☐	☐
Northern Leopard Frog	☒	☐	☐	☐	☒
Pagosa Milkvetch	☒	☐	☐	☐	☒

Comments: Refer to the site-specific COAs for details regarding mitigation to offset habitat loss and disturbance.

PIPELINE

Gas Carrier: **WPX Energy LLC and existing pipeline system under special use authorization.**

Length **56.5** feet x 40 foot corridor width.

Location: ☒ Parallels proposed access road ☒ Parallels/within existing cross-country corridor

☐ Parallels existing road

☐ New cross country corridor

☐ Entirely on existing location/no new surface disturbance

☐ Existing pipeline to be stripped (removed) across well pad and construction zone, and reconstructed/replaced after drilling

Authorization: ☒ Special Use Authorization

☒ Lease

Comments: **See attached pipeline plat. This corridor will include buried water, electric, and natural gas lines. One 56.5 ft. pipeline corridor will connect this location to an existing water and gas pipeline system and electric distribution system, the remainder of the pipeline corridor will be on the location, approximately 410.5 feet. All additional well-tie pipelines will be within the Pad #42 location. An existing special use authorization will be amended to reflect the addition of the pipelines.**

In addition, this decision will authorize the construction of a temporary water pipeline, see Figure 2 and attached pipeline plat. Pipeline length and disturbance, on NFS lands, is approximately 4,860 ft. x 40 ft., 4.46 acres. This water pipeline may be installed on a temporary basis on the ground surface, or if long term needs warrant it may be buried within the approved corridor along with an additional natural gas pipeline and buried electric line.

SITE SPECIFIC COAs

- Seed Mixture: See attached BLM-FFO pinyon-juniper community guidelines for seed mixture and specifications. Mulching and the sterile cover crop option is required. These requirements apply to pad and pipeline seeding.**
- As a mitigation requirement for Pad #42, a 160-acre archeological survey will be conducted in an area specified by the Forest Service. The survey and report is to be completed by the end of the calendar year in which any ground disturbing activities are initiated.**

JICARILLA RD EIS STANDARDS & GUIDELINES**1. General Administration for Development**

Yes	No	N/A	Item
☒	☐	☐	1. Proposal minimizes surface disturbance by using unconventional drilling techniques directional drilling or co-location).
☒	☐	☐	2. Encourage use of existing well pads, roads, and pipeline corridors for new facilities.
☒	☐	☐	3. Proposal utilizes established Best Management Practices found in most current version of the Gold Book.
☒	☐	☐	4. Timing Restriction – New drilling activity and completions is limited to April 1 through October 31. Normal recurring production and day-to-day operations will continue to occur year-round.

Comments: _____

2. Construction Techniques

Yes	No	N/A	Item
☒	☐	☐	1. Exclude well pad construction in riparian areas. If there are no other options other than to construct a well pad within a riparian area, additional NEPA analysis to approve a surface use plan of operations will be required and a site specific amendment to the forest plan would be required.
☒	☐	☐	2. When possible, exclude well pad construction on slopes greater than 20%, with cuts over 15 feet.
☒	☐	☐	3. Avoid new roads crossing slopes greater than 40%. Require an engineering design approved by the Forest Service to support road construction on slopes greater than 40%.
☒	☐	☐	4. Limit maximum grades to 8% for new roads, unless pitches are less than 300 feet (up to 10% permitted in some cases).
☒	☐	☐	5. Locate pipelines to minimize surface disturbance, such as aligning along existing roads and corridors.
☒	☐	☐	6. Minimize surface disturbance by putting pipes deep enough to allow other surface uses to occur on top of these lines.
☒	☐	☐	7. Encourage centralized collection points and water pipelines for produced water.

Comments: _____

3. Roads

Yes	No	N/A	Item
☐	☐	☒	1. Close all new lease roads over 300 feet in length to public motorized access, except where other resource needs dictate that a road should be left open to the public.
☐	☐	☒	2. Permit loop roads to access leases in cases only where a transportation proposal developed by the operator and approved by the Forest Service demonstrates that there would be a benefit to surface resources.

Comments: _____

4. Reclamation

Yes	No	N/A	Item
☒	☐	☐	1. Complete restoration and reclamation of surface disturbance to achieve 70% of the ground cover (compared to nearby undisturbed areas) with permanent native vegetation within 3 growing seasons.
☒	☐	☐	2. Bare ground necessary to conduct day-to-day operations must be kept to a minimum.
☒	☐	☐	3. Monitor the success of ground cover establishment until 70% of the ground cover is attained.
☒	☐	☐	4. Reclamation meeting the same standard is required for redisturbance of revegetated areas.
☒	☐	☐	5. Monitor and maintain reclaimed areas to minimize the establishment of invasive plants during the reclamation period.

Comments: _____

5. Air Quality

Yes	No	N/A	Item
☒	☐	☐	1. All newly developed facilities will utilize the air quality mitigation as set forth by the New Mexico Air Quality Bureau.
☒	☐	☐	2. When existing facilities are updated, industry will also follow New Mexico Air Quality Bureau mitigation measures.

Comments: _____

6. Noise

Yes	No	N/A	Item
☒	☐	☐	1. Comply with BLM's management of sound generated by oil and gas production and transportation in the San Juan Basin described in the "Notice to Lessees and Operators on Onshore Oil and Gas Leases Within the Jurisdiction of the Farmington Field Office (NTL-04-2-FFO)". As changes occur over time, the Forest Service will continue to adopt the BLM standards as they develop.
☐	☐	☒	2. Receptor Focused 48.6 dB(A)Leq will be achieved at Buzzard Park and Cedar Springs Campgrounds, Gasbuggy, and Carracas Mesa Administrative Site.
☐	☐	☒	3. Boundary Focused 48.6 dB(A)Leq will be achieved inside Middle Mesa Raptor Area, Ulibarri Raptor Area, and Muñoz Canyon Raptor Area at 400 feet in all directions from the noise source.
☐	☐	☒	4. Stricter noise standards may be applied to Gasbuggy, Buzzard Park, and Cedar Springs Campgrounds, if warranted.
☐	☐	☒	5. Additional noise sensitive areas such as changes in primary winter big game range, or new camping, picnic, or trail areas, may be identified and/or developed by the Forest Service. Any new policy would be implemented after a 30-day notice to the affected parties.

Comments: _____

7. Visual Impacts

Yes	No	N/A	Item
☐	☐	☒	1. Manage Vaqueros Canyon for a visual quality objective (VQO) or scenic integrity level of partial retention. This objective may be reduced by one level to other resource goals on a case-by-case basis.
☒	☐	☐	2. Employ design criteria for visual elements that adhere to the natural characteristics dominating the landscape to the extent possible.

Comments: _____

8. Areas of Resource Concern

Yes	No	N/A	Item
☐	☒	☐	1. Proposal is within an Area of Resource Concern (Bancos Canyon, La Jara Canyon, Valencia Canyon, Fierro Mesa, Fierro Canyon, and Vaqueros Canyon). Within these areas, apply current forest plan direction for Management Areas 4, 7, 8, 12, and 13 and manage for protecting, maintaining, and enhancing the resource values for which they are identified.
☐	☐	☒	2. Prior to developing any new well sites, associated roads, and pipelines within an area of resource concern, consider alternative drilling technology and various site locations to minimize the impacts to surface resources.
☐	☐	☒	3. A 5-year development strategy will be encouraged prior to development in areas of resource concern.

Area of Resource Concern	Resource Values	
Bancos Canyon	Cultural Resources Watershed	Wildlife Habitat Seclusion
La Jara Canyon	Undeveloped Characteristics	Wildlife Security
Valencia Canyon	Cultural Resources	Seclusion
Fierro Canyon	Undeveloped Characteristics	
Fierro Mesa		
Vaqueros Canyon	Visual Resources	Wildlife Habitat

Management Area	Forest Plan Direction
4 – Ponderosa Pine under 40%	- Improve drainage and surfacing on existing roads that will not be closed to improve riparian areas and reduce stream sedimentation with a guideline of 3.0 miles annually. - Lands which have the VQO of foreground retention and are located within the immediate foreground (100 to 300 feet) of a sensitive travel route, use area, or water body will be managed for the following: entry period will equal 20 years; 30-inch diameter pines with yellow deep fissured bark; stand age replacement will be 240 years. - Activities and uses remain visually subordinate to the characteristic landscape (partial retention VQO) or they may visually dominate the original characteristic of the landscape. However, they must borrow from the form, line, color, and texture of the landscape (modification VQO).
5 – Mixed Conifer & Ponderosa Pine over 40%	Activities and uses retain form, line, color, and texture which are characteristic of the landscape (retention VQO) or are visually subordinate to the characteristic landscape (partial retention VQO).
7 – Unsuitable Timber	Activities and uses the form, line, color, and texture which are characteristic of the landscape (retention VQO) or are visually subordinate to the characteristic landscape (partial retention VQO).
8 – Piñon/Juniper	- Unless other management objectives are determined to have priority, as determined by interdisciplinary team review, manage the juniper (Rocky Mountain and Utah) components to provide for habitat diversity. The following guidelines will be used on those areas where juniper diversity is to be maintained: - In areas where juniper comprises less than 10 trees/acre retain all live trees. - In areas where juniper comprises more than 10 trees/acre retain at least 10 of the largest live juniper trees. Trees retained should have greater than 25 percent living crown. - Maintain juniper and other species as a component when they are in piñon stands.
12 – Sagebrush	Activities and uses remain visually subordinate to the characteristic landscape (partial retention VQO) or they may visually dominate the original characteristic of the landscape. However, they must borrow from the form, line, color, and texture of the landscape (modification VQO).
13 – Oak	Activities and uses remain visually subordinate to the characteristic landscape (partial retention VQO) or they may visually dominate the original characteristic of the landscape. However, they must borrow from the form, line, color, and texture of the landscape (modification VQO).

Comments: _____

OTHER RESOURCE CONCERNS & ISSUES**1. Gasbuggy**

Yes	No	N/A	Item
☐	☒	☐	1. Proposed well occurs within Gasbuggy Withdrawn Area (Section 36, T29N, R4W).
☐	☒	☐	2. Proposed well occurs within Gasbuggy Area of Review (Sections 25, 26, 35, and 36 T29N, R4W; Sections 30 and 31, T29N, R3W; Sections 11, 12, 13, and 14, T28N, R4W; and Section 6, T28N, R3W). Includes any directional or horizontal wells that originate outside the "area of review", but have bottom hole completions within the "area of review". <i>Requires notification DOE for any NOSs and APDs for oil and gas.</i>
☐	☒	☐	3. Proposed well occurs within Gasbuggy Area of Interest (Section 36 and the east ½ of Section 35, T29N, R4W; and Section 12 and the east ½ of Section 11, T28N, R4W). <i>May require further environmental analysis prior to well drilling.</i>

Comments: _____

2. Wild & Scenic River Act

Yes	No	N/A	Item
☐	☒	☐	1. Proposed well occurs within potentially eligible (recreation) Carracas Canyon Wild & Scenic River Area.
☐	☒	☐	2. Proposed well occurs within potentially eligible (wild) Bancos Canyon Wild & Scenic River Area.
☒	☐	☐	3. Proposed well occurs within potentially eligible (recreation) Cabresto Canyon Wild & Scenic River Area.
☐	☒	☐	4. Proposed well occurs within potentially eligible (recreation) Vaqueros Canyon Wild & Scenic River Area.
☐	☒	☐	5. Proposed well occurs within potentially eligible (recreation) La Jara Canyon Wild & Scenic River Area.

Under Section 12(b) "Management Policies" of the 1968 Wild and Scenic Rivers Act as amended it states:

Nothing in this section shall be construed to abrogate any existing rights, privileges, or contracts affecting Federal lands held by any private party without the consent of said party.

Comments: **The temporary waterline does fall within the Cabresto Canyon Wild & Scenic River Area, but will be placed along existing corridors to minimize impacts.**

3. Travel Management

Yes	No	N/A	Item
☒	☐	☐	1. The proposed access road will be designated as a single-purpose road not open to public motorized use. This road designation is made pursuant to 36 CFR Part 212 – Travel Management as amended December 9, 2005. The following vehicles are exempt from this designation: aircraft, watercraft, limited administrative use by the Forest Service, use of any fire, military, emergency, or law enforcement vehicle for emergency purposes, authorized use of any combat or combat support vehicle for national defense purposes, law enforcement response to violations of law, including pursuit, and motor vehicle use that is specifically authorized under a written authorization issued under Federal laws or regulations.

4. Compliance with Other Laws and Regulations

Clean Water Act – Sections 401 and 404: **The temporary waterline would cross potential waters of the U.S. (e.g. Cabresto Canyon and unnamed drainages). The operator must consult with applicable agencies (e.g. U.S. Army Corps of Engineers and New Mexico Environment Department) and obtain necessary permits prior to construction of the temporary waterline.**

Other: _____

ENERGY POLICY ACT CATEGORY

Section 390 Categorical Exclusion (CE)

Applicable CE	Description
☒	1. Individual surface disturbances of less than 5 acres so long as the total surface disturbance on the lease is not greater than 150 acres and site-specific analysis in a document prepared pursuant to NEPA has been previously completed.
☐	2. Drilling an oil or gas well at a location or well pad site at which drilling has occurred previously within 5 years prior to the date of spudding the well.
☐	3. Drilling an oil or gas well within a developed field for which an approved land use plan or any environmental document prepared pursuant to NEPA analyzed such drilling as a reasonably foreseeable activity, so long as such plan or document was approved within 5 years prior to the date of spudding the well.
☐	4. Placement of a pipeline in an approved right-of-way corridor, so long as the corridor was approved within 5 years prior to the date of placement of the pipeline.
☐	5. Maintenance or a minor activity, other than any construction or major renovation of a building or facility.

DECISION

Background

Lease **NMSF 0078768** was acquired by **WPX Energy LLC**. Under the authority of the 1920 Mineral Leasing Act as amended, a Federal mineral lease conveys the right to use, in an environmentally responsible manner, the portion of the surface necessary to efficiently develop the leased Federal minerals. The Forest Service is the surface management agency for proposed gas wells on NFS lands and has authority over surface management, in accordance with the Federal Onshore Oil and Gas Leasing Reform Act of 1987 (codified in 36 CFR 228.107).

WPX Energy LLC proposed development of natural gas well. The proposed gas wells are within an existing developed oil/gas field in the San Juan Basin of northwestern New Mexico. Continued development of this existing field was analyzed in the Carson National Forest's Final Environmental Impact Statement (FEIS) for Surface Management of Gas Leasing and Development on the Jicarilla Ranger District. The FEIS was approved as a Carson National Forest Land and Resource Management Plan (Forest Plan) amendment and implemented on April 9, 2009. The FEIS analyzed full field development at 1,509 wells, with 4,198 acres of bare ground. There are currently **794** wells and **1,838** acres of bare ground associated with natural gas development on NFS lands within the Jicarilla Ranger District. Therefore, the proposed development is within the scope analyzed under the FEIS.

Decision

I have reviewed the project record and the information contained in this project review form, and decided to approve the proposed **Pad #42 (sixteen wells within the approved location)** natural gas well(s), which will allow **WPX Energy LLC** continuing development of existing mineral lease rights, while protecting surface resources through the use of reasonable conditions of approval (COAs). The life expectancy of the proposed well is approximately thirty years. Upon completion of construction and drilling activities, all areas not required for well production and operation would be reclaimed and seeded. Pipeline disturbance would be reclaimed to the maximum extent practical.

My decision allows the approval of the surface use plan of operations (SUPO) with COAs. This includes construction, drilling, completion, interim reclamation, operation, maintenance, well re-entry, abandonment, and final reclamation of the approved well, well pad, access road, well-tie pipeline, and ancillary facilities. In addition, my decision allows, throughout the life of the well, the operator to install, maintain, replace, and update equipment and associated ancillary facilities within the footprint of the approved well pad, road, pipeline corridor, and ancillary facility locations as necessary, as well as take the actions necessary to ensure well and pipeline safety, production, and efficiency. This will allow for the repair and replacement of damaged or outdated equipment and facilities, as well as the addition of equipment or facilities to meet future regulatory requirements or technological advancements. Upon well abandonment, all surface facilities would be removed and the surface disturbance associated with the well pad, access road, well-tie pipeline, and ancillary facilities would be reclaimed and returned to as natural condition as possible.

This decision does not limit or diminish the Forest Service's substantive authority or responsibility regarding review and approval of a SUPO conducted pursuant to 36 CFR 228.107-108. I assure operations related to this decision will minimize impacts on surface resources and prevent unnecessary or unreasonable surface resource disturbance; including impacts to cultural and historical resources, fisheries, wildlife, and plant habitat. Best management practices are to be applied as necessary to reduce impacts of any approved actions.

Reasons for Categorically Excluding the Decision

This decision is categorically excluded from documentation in an environmental impact statement or an environmental assessment, because it is consistent with Categorical Exclusion #1 of Section 390 of the Energy Policy Act of 2005, which is described as:

Individual surface disturbances of less than 5 acres so long as the total surface disturbance on the lease is not greater than 150 acres and site-specific analysis in a document prepared pursuant to NEPA has been previously completed.

Use of Categorical Exclusion #1 of Section 390 of the Energy Policy Act of 2005 is appropriate for this project because:

- **The project is under the 5-acre limitation. See Figure 1 for total project disturbance.**
- **The project will not increase the total lease disturbance over 150 acres. See Figure 1 for total lease surface disturbance.**
- **The project is tiered to the FEIS for Surface Management of Gas Leasing and Development on the Jicarilla Ranger District. Refer to the above discussion regarding the FEIS.**

Public Involvement

Public notification was conducted by posting the Notice of Staking (NOS) or Application for Permit to Drill (APD) at the Jicarilla Ranger District office in Bloomfield, NM for 30 days per Onshore Order #1. In addition, the project proposal was also posted on the Carson National Forest's internet web page, <https://www.fs.usda.gov/projects/carson/landmanagement/projects>.

Additionally, a scoping letter requesting feedback on the project was sent to various interested and affected parties.

Findings Required by Other Laws

This decision is consistent with the Carson National Forest Land and Resource Management Plan as required by the 1976 National Forest Management Act as amended.

This decision is consistent with the 1973 Endangered Species Act as amended, as documented in the Biological Assessment/Evaluation (in project record). Populations of management indicator species will not be affected by this decision, as documented in the Wildlife Specialist's Report, (in project record).

The decision is consistent with the National Historic Preservation Act as amended, as documented in the Heritage Resources Inventory report and Inventory Standards and Accounting form (in project record). Tribal consultation is documented in the Tribal Consultation report for the project (in the project record).

This decision is consistent with the National Forest Service Minerals Program Policy (1995) and Executive Order #12898 pertaining to minority and low-income communities. This decision will not have any disparate impacts on individual groups of people or communities.

Administrative Appeal Opportunities and Implementation Date

This decision is not subject to administrative appeal and can be implemented immediately.

Contact Person

For additional information concerning this decision, contact:

Richard A. Rymerson

District Ranger

Jicarilla Ranger District

1110 Rio Vista Lane, Unit #2, Bloomfield, NM 87413

(505) 632-2956



Richard A. Rymerson

District Ranger, Jicarilla Ranger District

1 AUG 17

Date


In accordance with Federal civil rights law and U.S. Department of Agriculture (USDA) civil rights regulations and policies, the USDA, its Agencies, offices, and employees, and institutions participating in or administering USDA programs are prohibited from discriminating based on race, color, national origin, religion, sex, gender identity (including gender expression), sexual orientation, disability, age, marital status, family/parental status, income derived from a public assistance program, political beliefs, or reprisal or retaliation for prior civil rights activity, in any program or activity conducted or funded by USDA (not all bases apply to all programs). Remedies and complaint filing deadlines vary by program or incident.

Persons with disabilities who require alternative means of communication for program information (e.g., Braille, large print, audiotape, American Sign Language, etc.) should contact the responsible Agency or USDA's TARGET Center at (202) 720-2600 (voice and TTY) or contact USDA through the Federal Relay Service at (800) 877-8339. Additionally, program information may be made available in languages other than English.

To file a program discrimination complaint, complete the USDA Program Discrimination Complaint Form, AD-3027, found online at http://www.ascr.usda.gov/complaint_filing_cust.html and at any USDA office or write a letter addressed to USDA and provide in the letter all of the information requested in the form. To request a copy of the complaint form, call (866) 632-9992. Submit your completed form or letter to USDA by: (1) mail: U.S. Department of Agriculture, Office of the Assistant Secretary for Civil Rights, 1400 Independence Avenue, SW, Washington, D.C. 20250-9410; (2) fax: (202) 690-7442; or (3) email: program.intake@usda.gov.

USDA is an equal opportunity provider, employer and lender.

Total Lease Disturbance

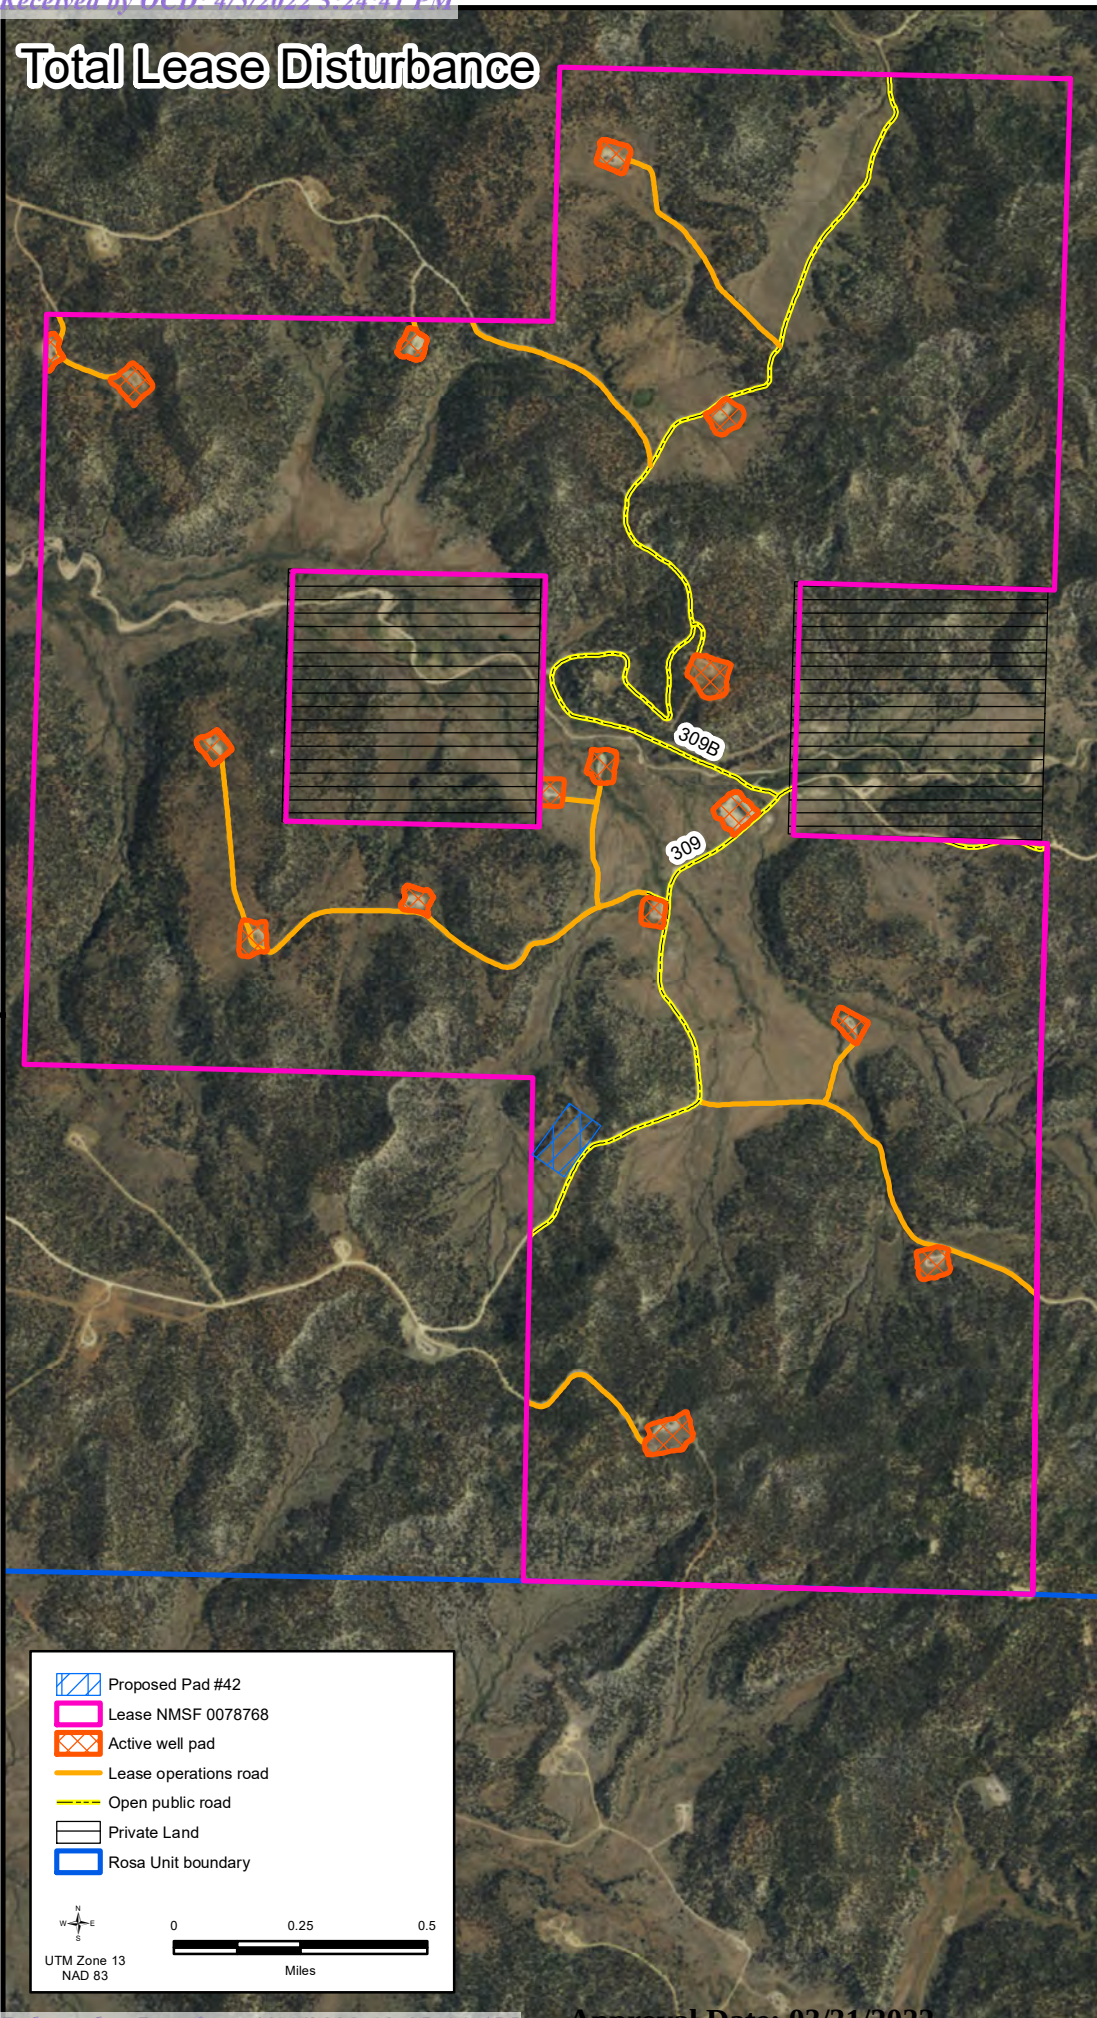

Pad #42: Section 36, Township 31 North, Range 5 West

Total pad disturbance: 6.17 acres

Total road/pipeline corridor: 56.5 ft. x 50 ft. = .06 acres

Total project disturbance: 6.17 acres + .06 acres = 6.23 acres

(6.23 acres divided by 16 wells = .39 acres per individual well)

Lease NMSF 0078768: Sections 23, 24, 25, 26, and 36, Township 31 North, Range 5 West

Disturbance from active well pads: 34.47 acres


Disturbance from lease operations roads: 16.08 acres

Total lease disturbance: 50.55 acres

Open public roads are not included in lease disturbance. All existing pipeline corridors are considered reclaimed and are not counted in lease disturbance.

Figure 1

Proposed Well Pad #42
Total project and
lease surface disturbance.

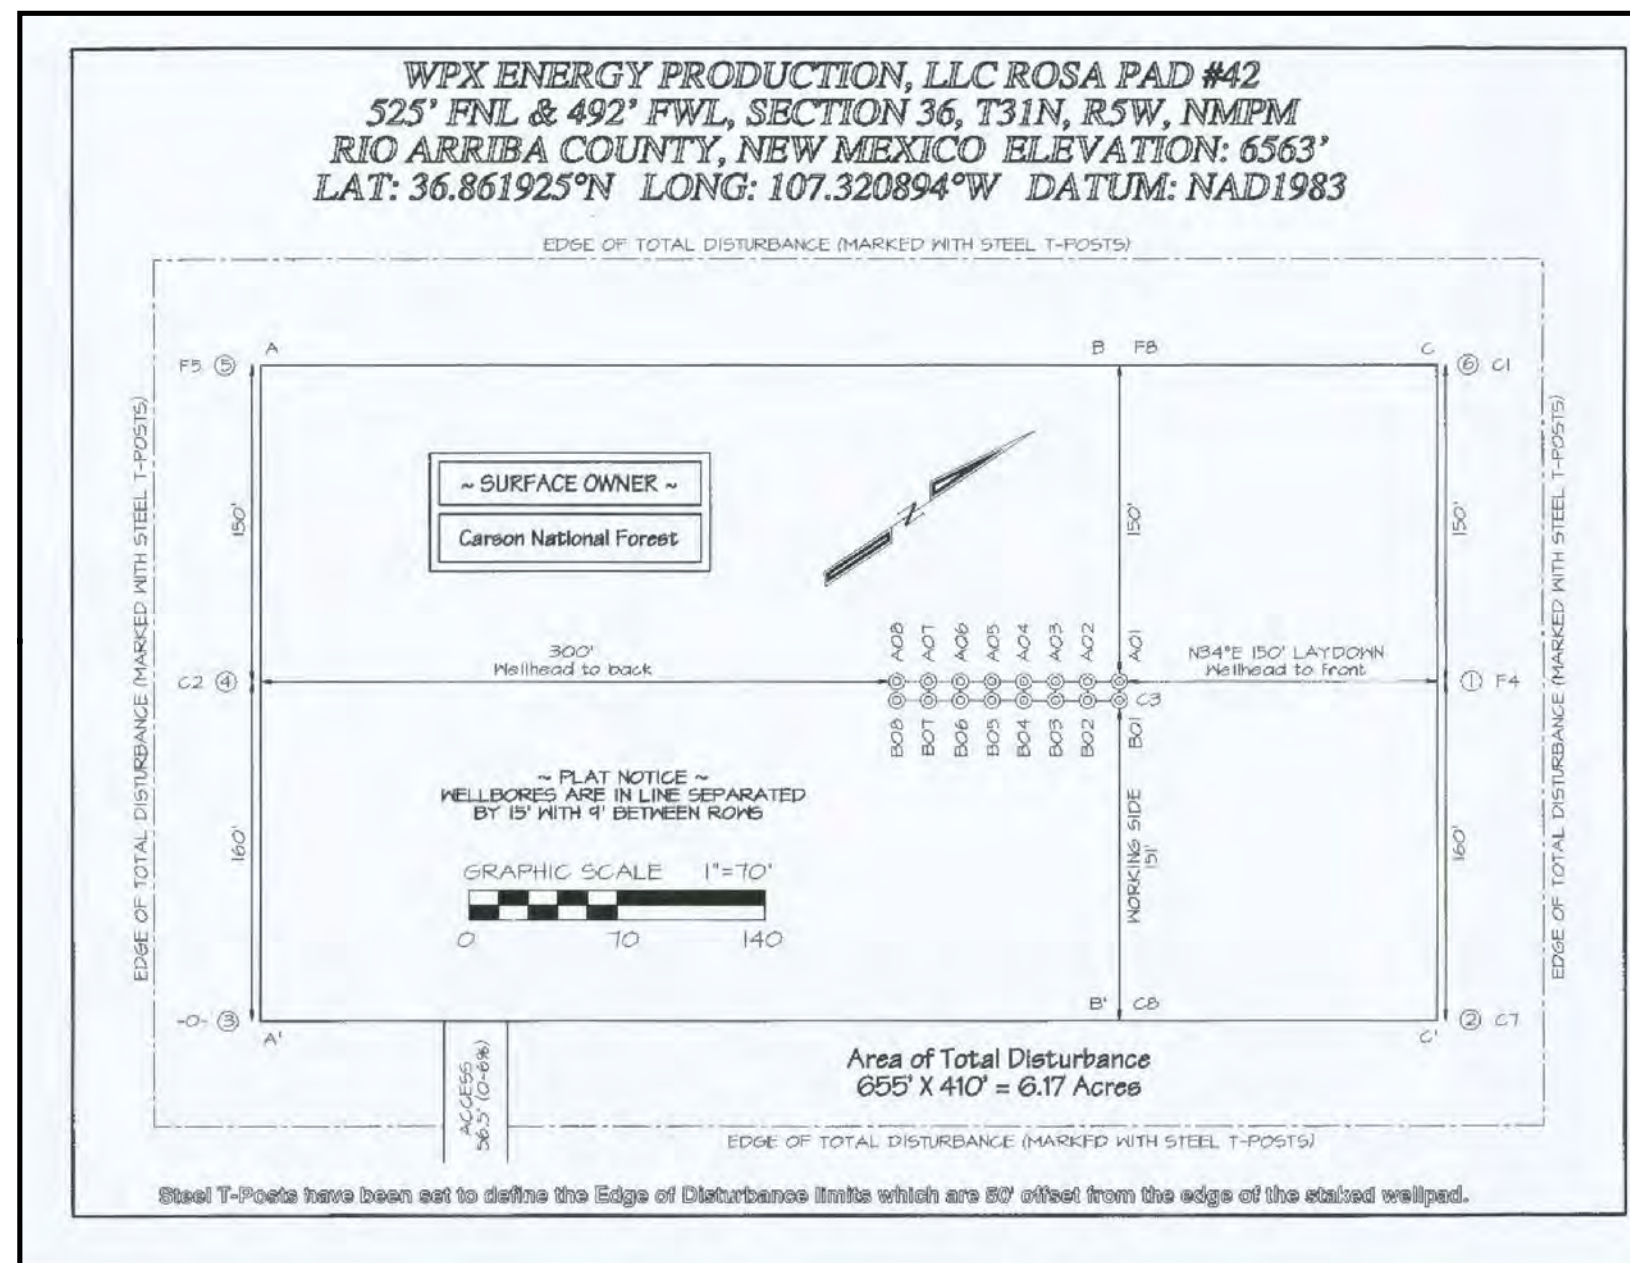

Total Lease Disturbance

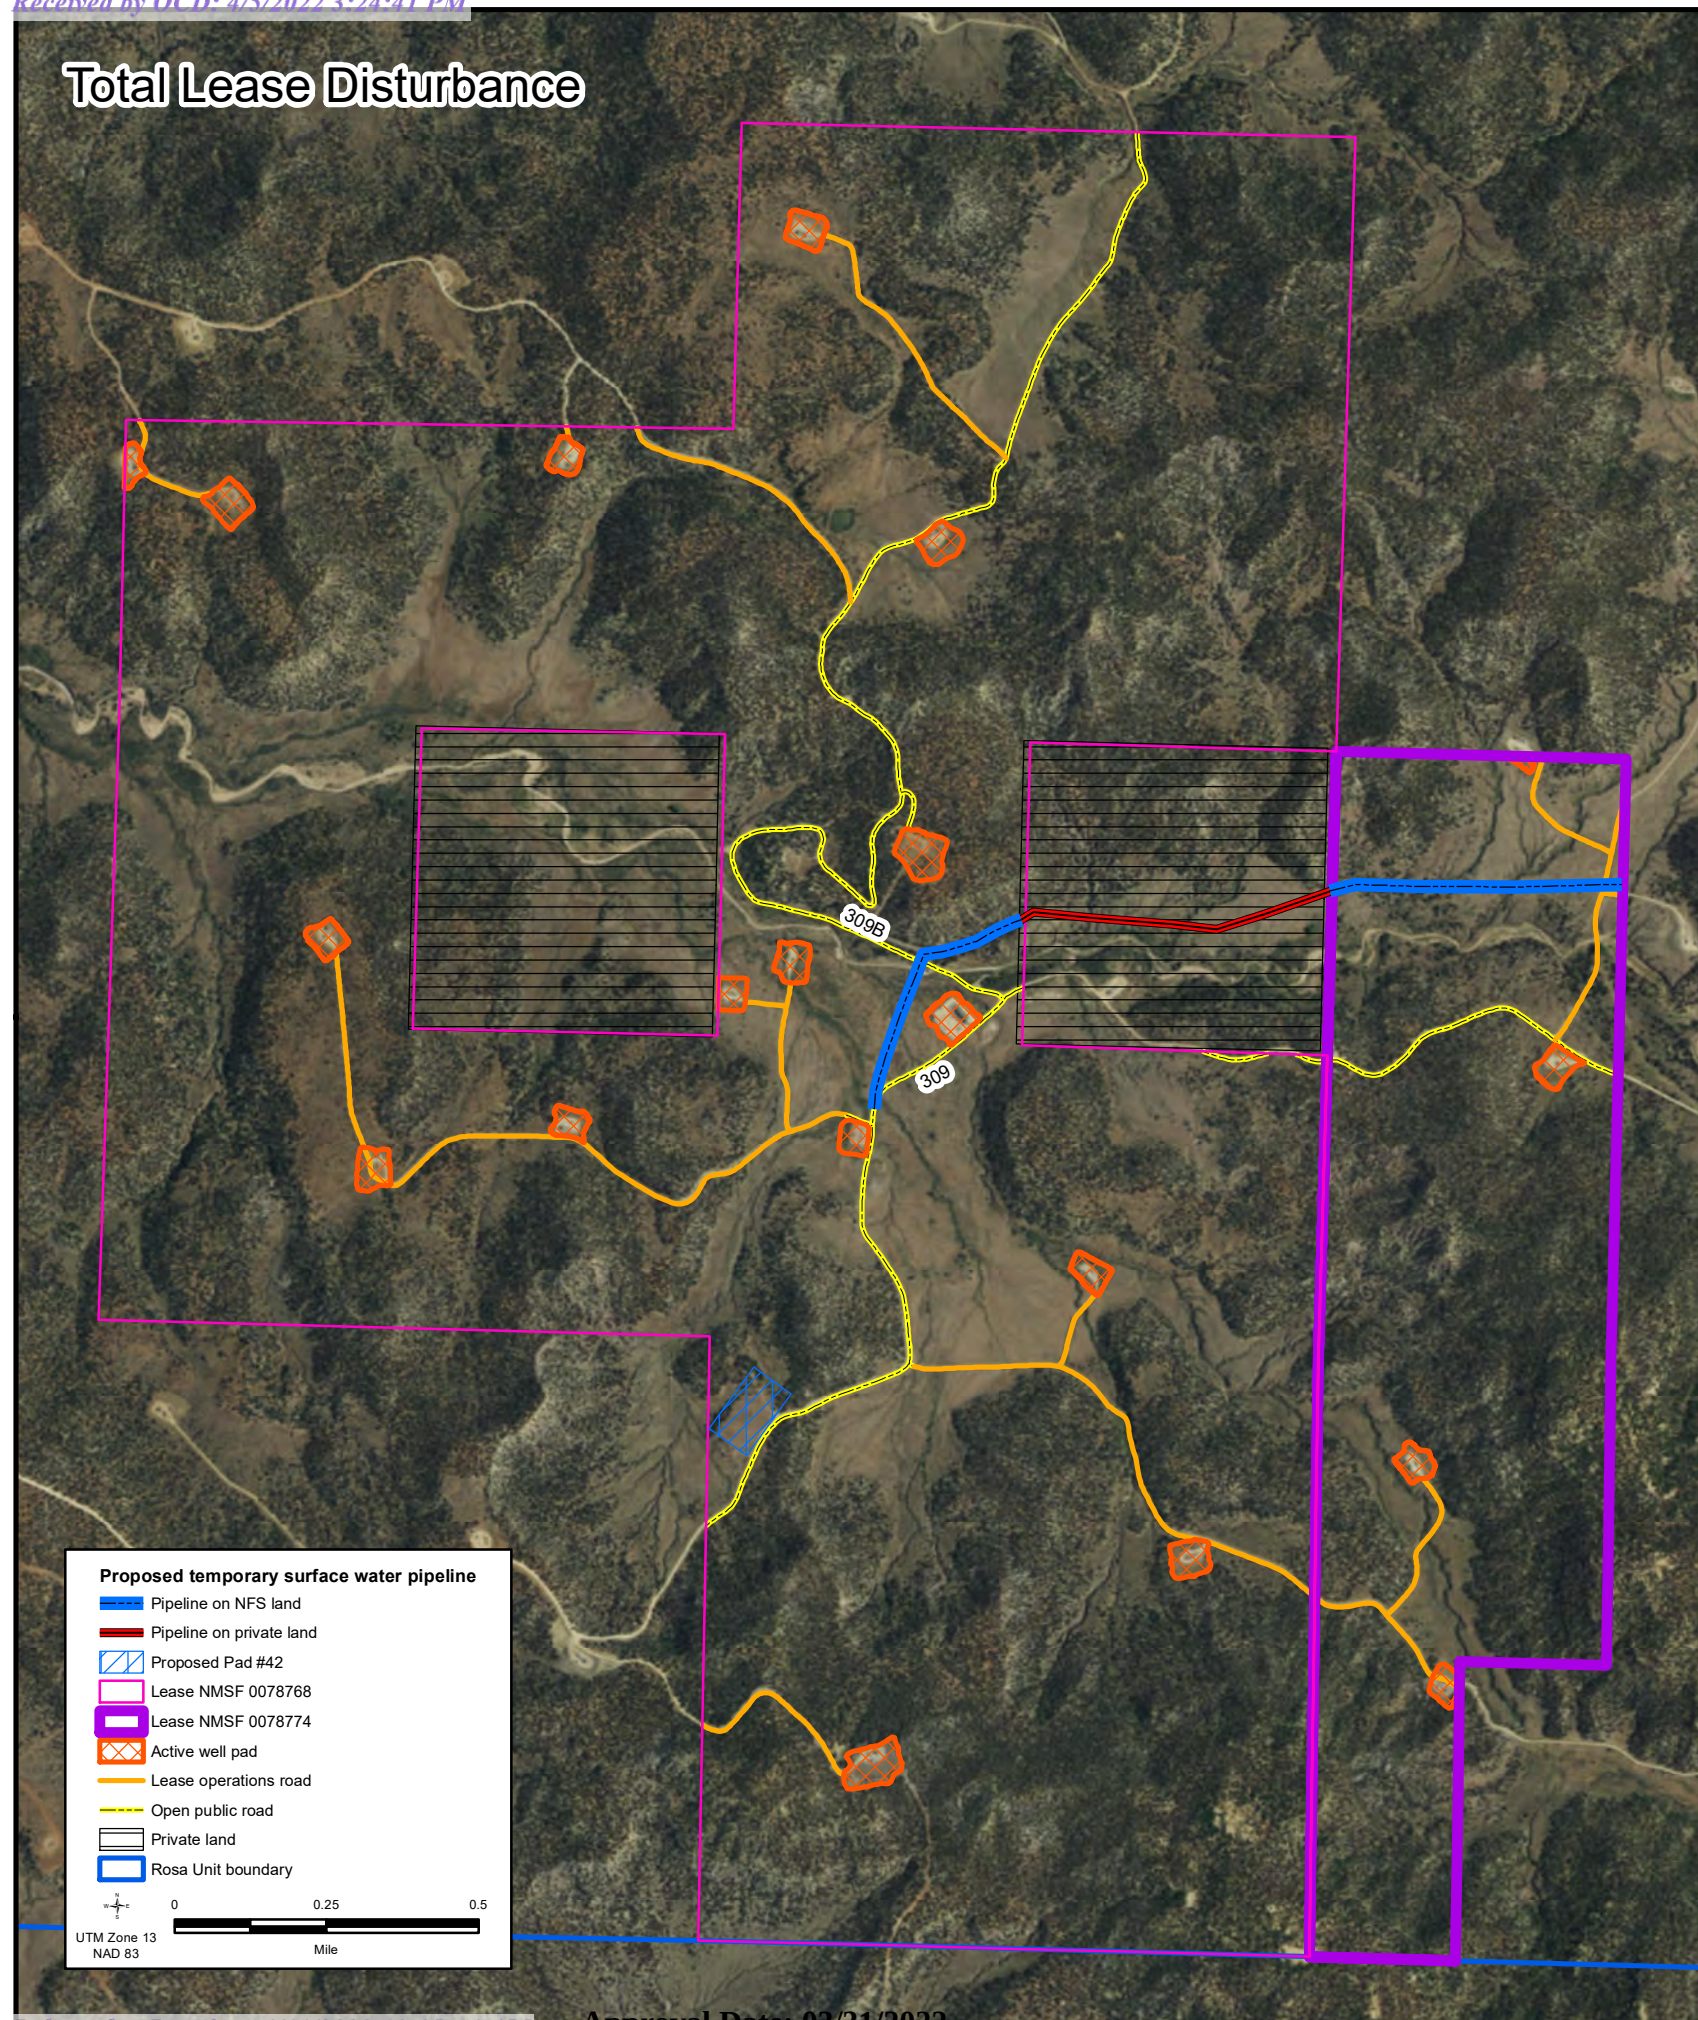


Figure 2

Proposed temporary surface water pipeline.

Proposed surface water pipeline:

Section 30, Township 31 North, Range 4 West

Section 25, Township 31 North, Range 5 West

Total project disturbance: 4.46 acres

Total pipeline corridor: 4,860 ft. x 40 ft. = 4.46 acres

(4.46 acres divided by 32 wells = .14 acres per individual well)

Lease NMSF 0078768:

Sections 23, 24, 25, 26, and 36, Township 31 North, Range 5 West

Disturbance from active well pads: 34.47 acres

Disturbance from lease operations roads: 16.08 acres

Total lease disturbance: 50.55 acres

Lease NMSF 0078774:

Sections 30 and 31, Township 31 North, Range 4 West

Disturbance from active well pads: 5.7 acres

Disturbance from lease operations roads: 3.04 acres

Total lease disturbance: 8.74 acres

Open public roads are not included in lease disturbance.

All existing pipeline corridors are considered reclaimed and are not counted in lease disturbance.

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 96236

CONDITIONS

Operator: LOGOS OPERATING, LLC 2010 Afton Place Farmington, NM 87401	OGRID: 289408
	Action Number: 96236
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Will require a administrative order for non-standard location prior to placing the well on production	4/11/2022
kpickford	Notify OCD 24 hours prior to casing & cement	4/11/2022
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104	4/11/2022
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	4/11/2022
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing	4/11/2022
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	4/11/2022