

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

Energy, Minerals and Natural Resources

Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-005-10560
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Cato San Andres Unit
8. Well Number 055
9. OGRID Number 330485
10. Pool name or Wildcat Cato; San Andres

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Cano Petro of New Mexico, Inc.

3. Address of Operator
801 Cherry Street Suite 3200 Unit 25 Fort Worth, TX 76102

4. Well Location

Unit Letter N 660 feet from the S line and 1980 feet from the W line
 Section 11 Township 08S Range 30E NMPM County Chaves

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
N/A

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ **P AND A** ☒
 CASING/CEMENT JOB ☐ PNR
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

NMOCD plugged well according to attached EOW report and plugged WBD.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Drake McCulloch TITLE Authorized Representative DATE 6/24/22

Type or print name Drake McCulloch E-mail address: drake@dwsrigns.com PHONE: 505 320 1180

For State Use Only


APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 7/1/22

Conditions of Approval (if any)





1:32

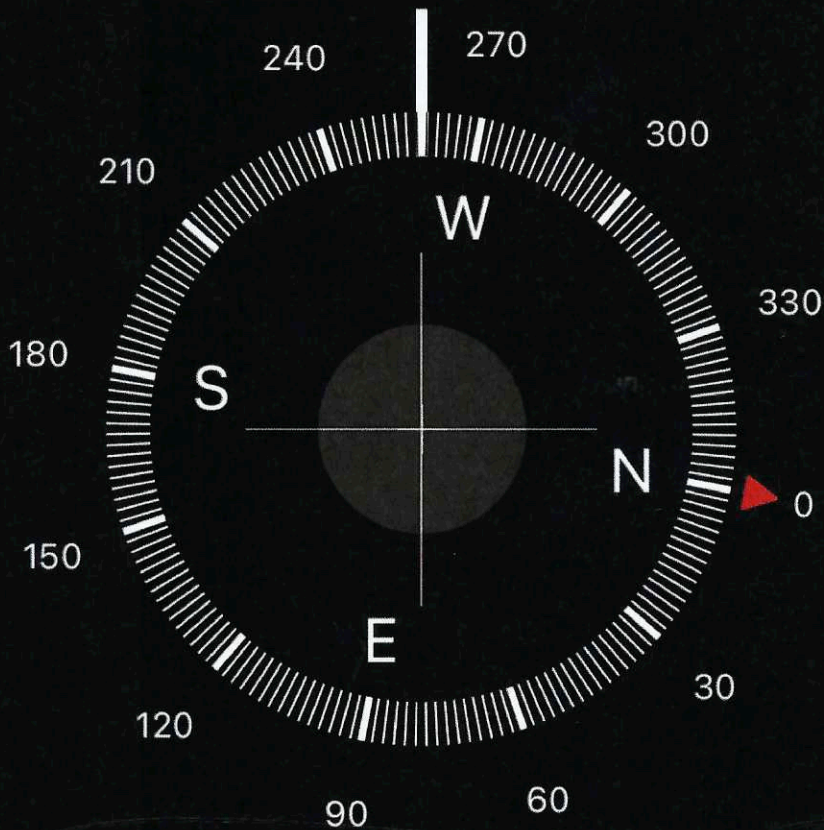

258° W

33°37'44" N 103°51'9" W

Elida, NM

4140 ft Elevation

Cano Petro Inc./NMOCD OWP**Plug And Abandonment End Of Well Report****Cato San Andres Unit #055**

660' FSL & 1980' FWL, Section 11, T8S, R30E

Chaves County, NM / API 30-005-10560

Work Summary:

- 6/10/22** Made NMOCD P&A operations notifications at 9:00 AM MST.
- 6/13/22** MOL and R/U P&A rig. Prepped location with backhoe. Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. N/D wellhead, N/U BOP and function tested. L/D 1 – 2-3/8" pup joint. P/U 4 1/2" casing scraper and work string and TIH to a depth of 1,162' where casing scraper tagged up. TOOH. P/U mule shoe sub. TIH and tagged up at 1,162'. R/U power swivel. Drilled down to 1,665' where no more progress could be made down wellbore. Circulated wellbore with fresh water. TOOH. Last 4 joints of tubing were twisted and cut, 9 joints were left in wellbore. Secured and shut-in well for the day.
- 6/14/22** Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. TIH and tagged up at 1,162'. TOOH. P/U 4 1/2" packer, TIH and set at 1,058'. Attempted to establish injection rate below packer at 1,058' but was unsuccessful. Un-set packer and TOOH. TIH to 1,152'. R/U cementing services. Pumped plug #1 from 1,152'-778' to cover the San Andres perforations and formation top and Yates and Rustler formation tops. TOOH. WOC 4 hours. TIH and tagged back at 1,162'. R/U cementing services. Re-pumped plug #1 from 1,152'-778'. TOOH. WOC 4 hours. TIH and tagged back at 1,162'. R/U cementing services. Re-pumped plug #1 from 1,152'-778'. TOOH. WOC overnight. Secured and shut-in well for the day.
- 6/15/22** Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. TIH and tagged plug #1 top at 827'. R/U

cementing services. Pressure tested 4 ½" production casing to 500 psi in which it successfully held pressure. Attempted to pressure test Bradenhead to 300 psi in which it failed to hold pressure. Spotted 9.5 ppg mud spacer from 827'-561'. L/D tubing to surface. R/U wireline services. RIH and perforated squeeze holes at 561'. R/U cementing services. Successfully established circulation down 4 ½" production casing through perforations at 561' and back around and out Bradenhead valve at surface with 35 bbls of fresh water. Successfully circulated cement down 4 ½" production casing through perforations at 561' and back around and out Bradenhead valve at surface. N/D BOP, N/U wellhead. R/D and MOL.

6/23/22 Checked well pressures: Tubing: 0 psi, Casing: 0 psi, Bradenhead: 0 psi. Bled down well. Dug-out wellhead with backhoe. Performed wellhead cut-off. Cement was at surface in both the 8-5/8" surface casing annulus and 4 ½" production casing. Installed subsurface P&A marker per NMOC regulations. Photographed the P&A marker in place and recorded its location via GPS coordinates. Back filled P&A marker. R/D and MOL.

Plug Summary:

Plug #1:(San Andres Perforations and Formation Top, Yates and Rustler Formation Tops 1,152'-827', 75 Sacks Type III Cement(Re-pumped 50 sx))

Mixed 75 sx Type III cement and spotted a balanced plug to cover the San Andres perforations and formation top, Yates and Rustler formation tops. Re-pumped 50 sx.

Plug #2: (Surface Casing Shoe 561'-Surface, 146 Sacks Type III Cement)

RIH and perforated squeeze holes at 561'. R/U cementing services. Successfully established circulation down 4 ½" production casing through perforations at 561' and back around and out Bradenhead valve at surface with 35 bbls of fresh water. Successfully circulated cement down 4 ½" production casing through perforations at 561' and back around and out Bradenhead valve at surface. N/D BOP, N/U wellhead. R/D and MOL. Dug-out wellhead with backhoe. Performed wellhead cut-off. Cement was at surface in both the 8-5/8" surface casing annulus and 4 ½" production casing. Installed subsurface P&A marker per NMOC regulations. Photographed the P&A marker in place and recorded its location via GPS coordinates. Back filled P&A marker. R/D and MOL.

End of Well Wellbore Diagram

Cato San Andres Unit #055

API #: 30-005-10560

Chaves County, New Mexico

Plug 2

561 feet - Surface

561 foot plug

146 sacks of Type III Cement

Plug1

1152 feet - 827 feet

325 foot plug

75 sacks of Type III Cement

Re-pumped 50 sks Type III Cement

Surface Casing

8.625" 28# @ 511 ft

Formation

Rustler - 1072 ft

Yates - 1545 ft

San Andres - 3428 ft


Perforations

3478 feet - 3508 feet

3538 feet - 3557 feet

Production Casing

4.5" 9.5# @ 3596 ft

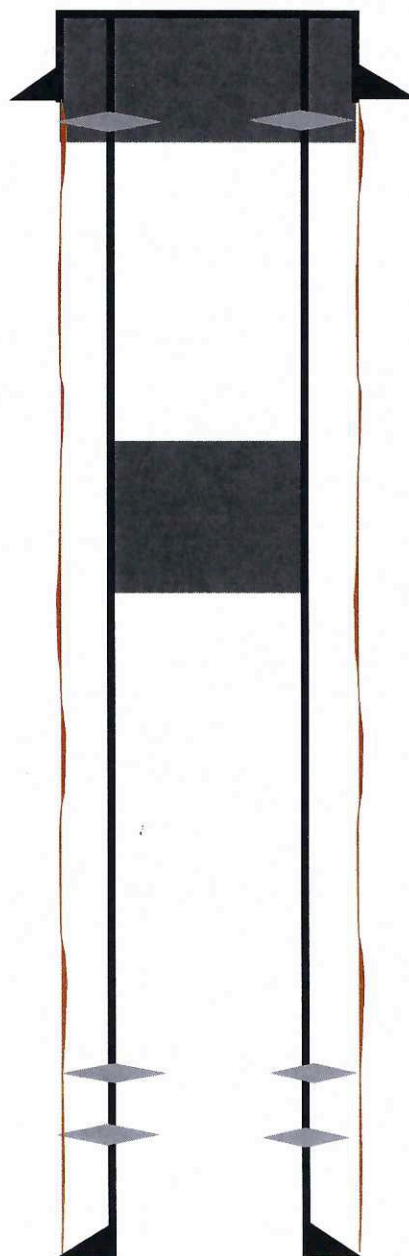

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 120450

COMMENTS

Operator: J.A. Drake Well Service Inc. 607 W Pinon Farmington, NM 87401	OGRID: 330485
	Action Number: 120450
	Action Type: [C-103] Sub. Plugging (C-103P)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM	7/6/2022

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 120450

CONDITIONS

Operator: J.A. Drake Well Service Inc. 607 W Pinon Farmington, NM 87401	OGRID: 330485
	Action Number: 120450
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Need C103Q and marker pics to release	7/1/2022